



00.	About RUBI Group
04	Introduction
01.	Manual tile cutting
32	Manual Tile Cutters
68	Scoring wheels and accessories for manual cutters
02.	Slab System
78	Cutting large tile
88	Handling large tile
100	Installing large tile
03.	Electric tile cutting
110	Electric cutters
140	Circular Saw, Bevelling and Vacuum Cleaner
04.	Diamond blades
156	Dry cutting diamond blades
163	Wet cutting diamond blades
05.	Drilling
172	Tools for drilling ceramic tile, stoneware, marble, granite and other materials
06.	Grinding & polishing

186

192

Grinding wheels and blades

Blades and Polishing pads



xx
































DISCOVER THE NEW RUBI PRODUCTS 2025





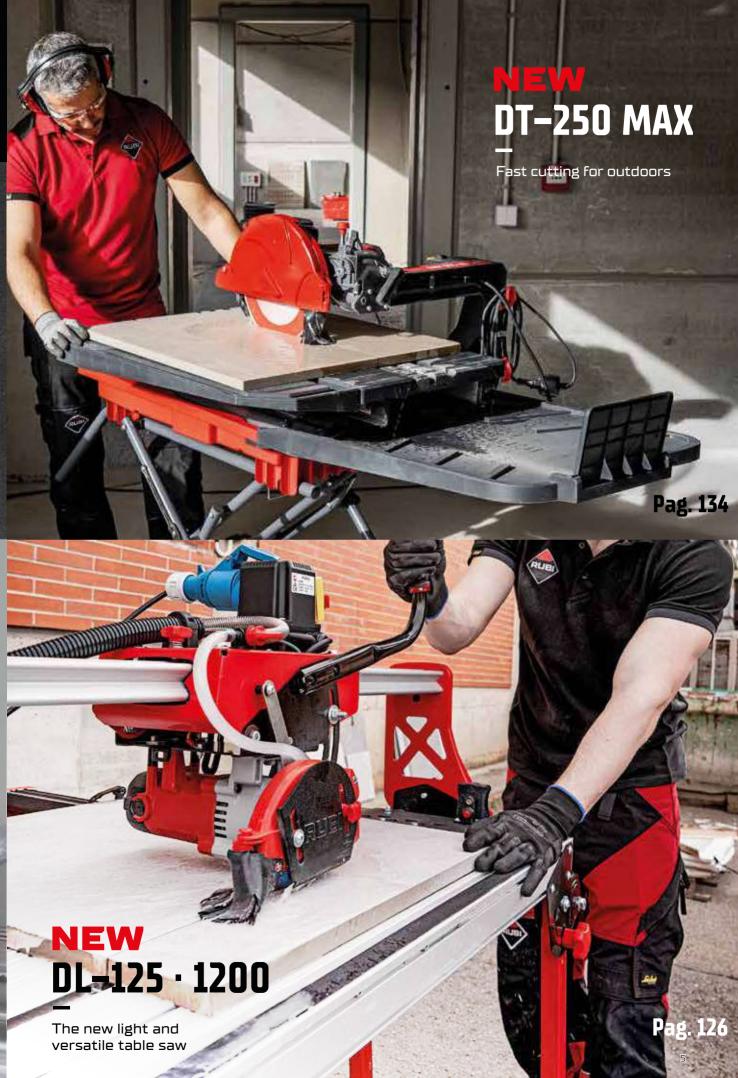




THE BEST OPTION FOR EACH JOB SINCE 1951

At RUBI Group, we are experts in the design, manufacture and distribution of revolutionary machinery and tools for cutting, laying and maintaining tiles. Our relentless dedication to excellence has positioned us as the undisputed leaders in the industry. Every product we create is the result of our passion for innovation and our unwavering commitment to quality.


cutter in history, invented and patented by the Boada brothers in 1951, RUBI has always worked with a clear mission: to provide differentiated solutions to construction professionals by providing maximum efficiency, profitability and safety for the optimal installation of ceramic tiles.

In this way, by placing the installer at the centre of our strategy, we ensure that **innovation**, **the high quality of our products and excellence are fundamental principles throughout our product range.** The RUBI brand is currently recognised by the most demanding construction and design professionals in more than 120 countries, thanks to our robust international network of subsidiaries and branches.

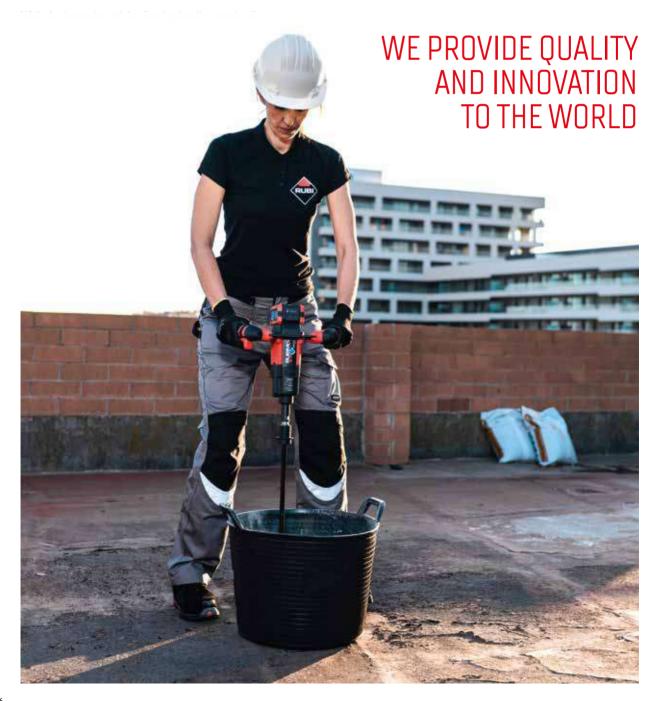



RUBI IS RUBI ALL OVER THE WORLD

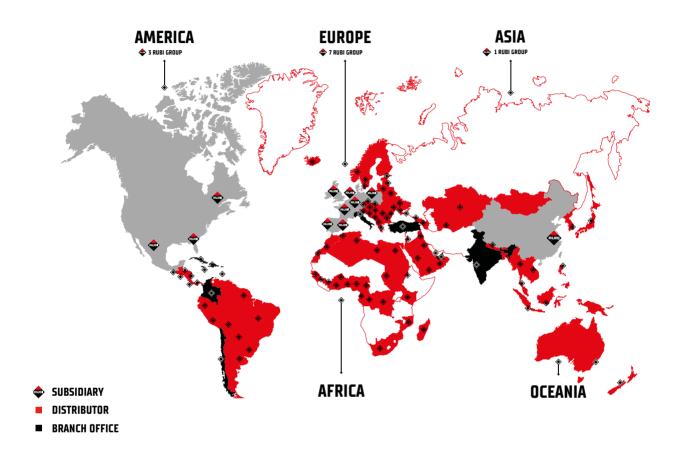

- +600 People in the RUBI Team
- Production and logistics centres
- 11 International subsidiaries

- 120 Countries with RUBI brand distribution
- +100 Official Distributors

At RUBI Group, our multidisciplinary team is highly qualified and undergoes continual training. We are firmly committed to excellence, respect and passion, core values that guide our actions every day.

Our team is made up of more than 600 professionals in 11 subsidiaries and 9 branches around the world. Our experience and knowhow support us in providing quality solutions at an international level.



BETTER PROFESSIONALS. BETTER PLACES.

THE RUBI 'BETTER PROFESSIONALS, BETTER PLACES' COMMITMENT.

At RUBI Group we are guided by our corporate purpose "Better Professionals. Better Places" that reflects our focus on two fundamental aspects, improving the quality and performance of our industry through the professionals whose talent is recognised by all, as well as the places they transform with their creativity.

We strive to change the future by being leaders in training exceptional professionals and contributing to building exceptional places, for the benefit of a better world.

Training for construction students at the BTP CFA apprenticeship centre in Antibes. France.

SDG FOR A SUSTAINABLE AND EQUITABLE FUTURE

Our commitment focuses on sustainable development as part of our Corporate Social Responsibility strategy, which encompasses the three key areas of sustainability: social, environmental and economic.

In doing so, we draw on 8 of the 17 Sustainable Development Goals (SDGs) set by the United Nations for the period 2015–2030, which guide us on our path towards a future with a focus on sustainability.

We firmly believe that environmental policies and social and economic sustainability are the responsibility of the



Collaboration with the Vicente Ferrer Foundation in the construction of housing for vulnerable people in Anantapur, India.





entire RUBI team. Only in a fairer, more equal and more sustainable world can we continue growing and working together with society and our environment.

TOGETHER WE ARE BUILDING A SUSTAINABLE AND EQUITABLE FUTURE FOR ALL.





Beach clean-up in Florida by RUBI Tools USA team.







LET'S BUILD BETTER PLACES TOGETHER!

The RUBI Academy is a pioneering project designed to professionalise and promote the tiler's trade, aimed at present and future ceramics professionals.

With more than 70 years' experience in training and supporting ceramic tile installers, we bring together all our training activities in an inclusive and accessible space: the RUBI Academy.

The RUBI Academy promotes learning opportunities through a wide range of international training events, webinars, downloadable tutorials and audio-visual content available on our website.

In addition to these training actions, the RUBI Academy supports initiatives such as the "RUBI Scholarship", which promotes specialisation in tile installation among young students and collaborates in training events aimed at women in the construction industry or unemployed people who are continuing their training.

The main base of the RUBI Academy is located in our facilities in Santa Oliva, where it has a physical space dedicated to training. It has a classroom for theory classes and another space with more than 580 square metres for practical training.

In this way, the RUBI Academy is consolidated as an accessible and quality training space, which also serves as an in-person and virtual meeting point for professionals in the sector. We value and raise the profile of the tiler's trade, bringing it closer to people and acknowledging the important role of ceramic tile installers in the construction industry.



FOLLOW US ON OUR YOUTUBE CHANNEL TO SEE ALL THE TRAINING VIDEOS
















PRODUCTION FACILITIES

RUBI Group has 2 production centres in Santa Oliva (Tarragona, Spain) and Suzhou (China), which translates into more than 120,000 m2 of facilities worldwide.

Our main production and logistics centre in Santa Oliva (Tarragona, Spain) covers a surface area of 27,000 m2 and is equipped with the most advanced technology for logistics management. Moreover, thanks to the innovative SRT centre (Suzhou, China) we guarantee the stock availability of our products throughout the different geographical areas in which RUBI operates, meeting demanding service level ratios. Both production centres are also equipped with the latest production and logistics technology to ensure that we obtain high-quality products and a shipping service that minimises delivery times.



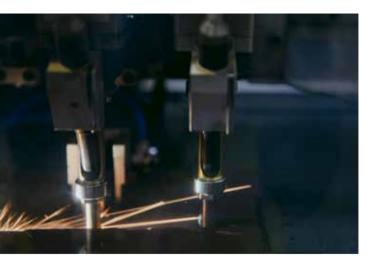









SHOWROOMS IN SUBSIDIARIES

RUBI's 11 subsidiaries cover global demand and the training and after-sales service, together with our trusted distributors, so we are always close to the user and can offer them solutions adapted to the characteristics of each market. In addition, in several of them, including our headquarters, we have modern showrooms displaying our latest market launches. We offer, in this way, an updated and innovative experience to our customers and users, showing how RUBI products meet the needs of the tiler in line with the new trends in the ceramic industry.



Showroom at RUBI Portugal's premises

CORPORATE MUSEUM

Since 1951, the RUBI team has been passionately devoted to professionalising the construction trades. As a reflection of our commitment, in 2003 we opened "The Tools of Construction" Corporate Museum at our main facilities in Santa Oliva, Tarragona. The museum is open to customers, professionals and students, providing them with a unique educational experience. They will be able to explore our historical collection of RUBI construction tools and test their skills in cutting and laying tiles.

HISTORY AND INNOVATION COME TOGETHER TO DRIVE GROWTH AND EXCELLENCE IN THE SECTOR.







AFTER-SALES SERVICE

RUBI's after-sales team, together with our extensive network of official technical services, work daily to deal as efficiently as possible with incidents and any questions and needs our customers and professionals may have regarding the cutting and laying of ceramic tiles.

At RUBI Group, we lead the market with high and fast response rates, thus achieving exceptional customer satisfaction worldwide. We guarantee superior performance in our tools, providing a long-lasting and satisfying purchasing experience with impeccable customer service.

There are a number of ways for you to contact us:







aftersales@rubi.com

+34 936 80 65 00







RUBI CLUB

RUBI CLUB members are always one step ahead of other tile laying professionals, thus gaining greater profitability and prestige for their business.

At RUBI, all products give you points that can be conveniently changed for money or gifts, and you get great discounts just for registering your purchases. You can also extend the useful life of your tools, with the free warranty extension of up to 5 years, and get the most out of your investments. Thanks to our new products and exclusive promotions for **RUBI CLUB** members, you can work with the best tools under the best conditions.

Currently, more than 70,000 experts in the art of tile laying around the world already trust **CLUB RUBI** to make them better professionals and deliver their projects in the most efficient way.

Join the top community of tile laying experts worldwide and benefit from all its advantages!



GET MONEY BACK ON YOUR PURCHASES



EXTEND THE WARRANTY FREE OF CHARGE



ACCESS EXCLUSIVE PROMOTIONS



RECEIVE INVITATIONS FOR EVENTS



ENJOY UNIQUE CONTENT




PARTICIPATE IN COMPETITIONS AND DRAWS





RUBI CLUE

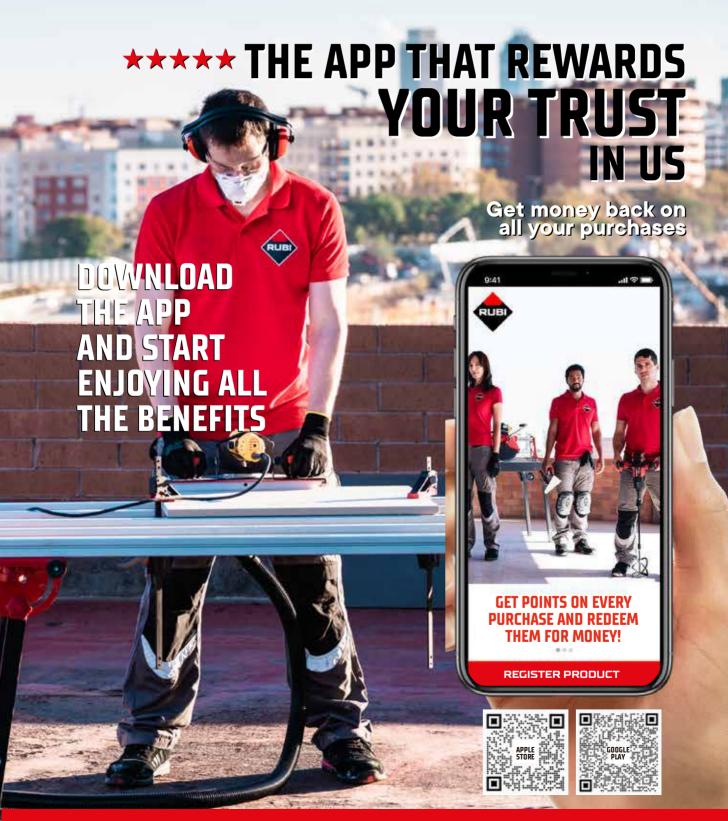

DOWNLOAD IT AND START ACCUMULATING POINTS



At RUBI, innovation and quality are fundamental pillars in everything we do: from the conception of the design, through the production phase, and finally reflected in our products. We are proud to offer solutions that enable the tiling professional to carry out their work with creativity and good attention to detail, obtaining optimum results of the highest quality.


TECHNOLOGICAL LEADERSHIP

119 Patented products

Protected products with industrial design





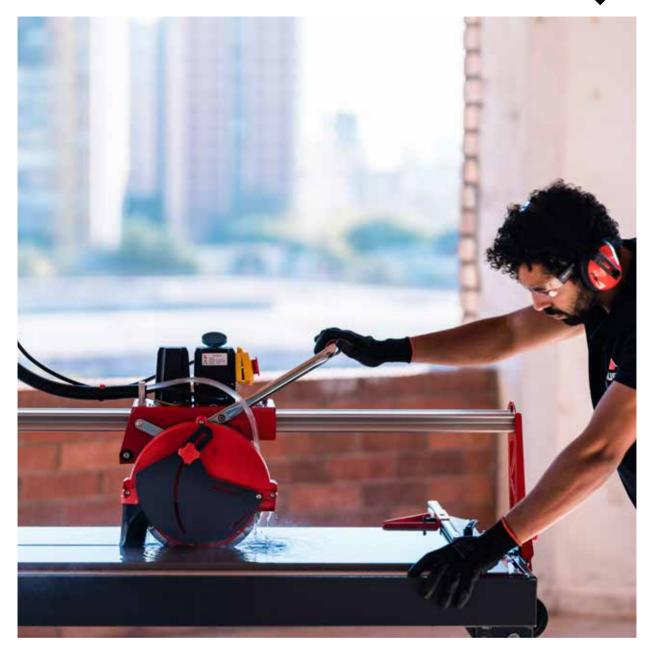

INNOVATION

We are constantly researching and developing new solutions based on the evolution of market and technology trends, our own experience and ongoing conversations with end users, our partners and other professionals.

QUALITY

We only use materials of the highest quality and we work in compliance with strict design and manufacturing standards in order to offer tools with the performance levels that our customers expect.

GUARANTEE

We strive to offer greater durability in our products and a peace of mind that comes from our long track record, also backed up by a customer support service and constant communication with the same global nature.

SOLUTIONS

Understanding and helping to shape our industry for generations has allowed us to create a wide range of tools that provide excellence and efficiency in the cutting and laying of tiles.






"SLS" 4TH GENERATION SCORING WHEELS



COMPATIBILITY TABLE

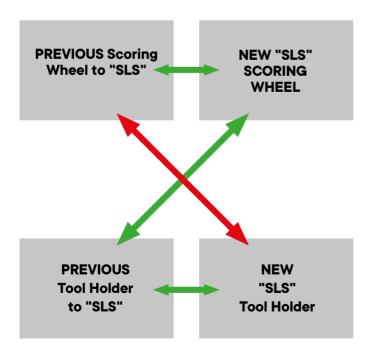

THE NEW "SLS" SCORING WHEELS ARE COMPATIBLE WITH ALL CUITTERS

The new SLS scoring wheels are compatible with both cutters that feature the new SLS-marked tool holder and cutters with the previous tool holder.

SCORING WHEELS PREVIOUS TO THE NEW "SLS" VERSION ARE NOT COMPATIBLE WITH CUTTERS FEATURING THE "SLS" TOOL HOLDER

Unlike the new SLS scoring wheels, previous versions lose compatibility with the new manual cutters featuring the SLS marking.

PARTNERSHIP WITH CAS

RUBI & CAS work to offer professionals battery-powered tools for ceramic tile installation with total freedom of movement. CAS batteries are compatible with more than 35 brands and over 300 products, making it a low-cost, high-performance solution for tilers. From RUBI, we have created and launched 4 innovative and revolutionary products with this leading technology.

CAS LI-ION **18V**BATTERY COMPATIBLE
WITH METABO **18V**CORDLESS TOOLS AND
ALL OF THOSE THAT
FORM PART OF THE CAS
PLATFORM.













CAS BATTERY
LI-POWER **12V**COMPATIBLE WITH
METABO BRAND **12V**BATTERY TOOLS AND
WITH ALL THOSE THAT
ARE PART OF THE CAS
PLATFORM.





CAS BATTERIES

12/18V 2.0/4.0/5.2AH





Battery-powered tools for tile installers







Save time



1 battery pack for many brands



Save money



Save resources



Largest multi-manufacturer battery pack system



100% compatible

Cas battery compatibility



The charger is compatible with all batteries.



THE RUBI EXPERIENCE

5 STEPS TO EXCELLENCE

RUBI ensures quality, efficiency and creativity from start to finish at every stage of the tile installation process.

This basic signage across our entire product range helps the professional find the right tool for the task at hand, providing a clear and visual solution.

Our portfolio is now organised into these 5 categories, which have been defined taking into account our customers' testimonials about their own work processes, in the more than 120 countries where we operate.













1. Preparation

This phase includes all the processes prior to the installation of ceramic and porcelain tiles, starting with the preparation and making good of the substrates and the checking of levels, followed by the layout and design of the joint pattern and ending with the preparation and application of the tile adhesive.



2. Cutting and Drilling

Although after the preparation of the adhesive, this logically takes us to the installation stage, RUBI has included the cutting and drilling phase in second place. The reason is very simple, if we take into account that the tile needs to be cut (or drilled), it cannot be installed until this step has been carried out. All installations require tiles to be adapted and resized to the installation space and, whether it is to a greater or lesser extent, a ceramic tile will always have to be cut (or drilled).



3. Installation

In this stage, we mainly focus on bringing together all the necessary tools to ensure proper handling and installation of the tile, obtaining the best results both in flatness and alignment in order to make the setting-out design a reality with maximum precision.



4. Grouting

As its name indicates, this stage includes all the tools necessary for the filling and definition of the tile joint, as well as the removal of excess material and a first cleaning stage.



5. Cleaning

As it must do, the last stage brings together everything that is necessary to deliver the perfect job. The final cleaning of any ceramic tile installation process will always make the first impression on any user. For this reason, it is as important as any of the previous stages.





MANUAL TILE CUTTING

Manual Tile Cutters
Scoring wheels and accessories for manual cutters





SELECTION TABLE

				MAX ←		
			cm	inch		
	◇ PREMIUM	••• Intensive	тz	85, 102, 130, 155, 180	33 %, 40 %, 51 %, 61 %, 70 %	
Marketing Indindind			тк	85, 102, 130, 160	33 %, 40 %, 51 %, 63	
			TX-MAX	71, 102, 125	27 15/16, 40 3/16, 49 3/16	
Adjustable from 0°−45°		••• Intensive	TP-S / TP-T	66, 75, 93, 125	26, 29 ½, 36 5, 49 3/6	
			TR-MAGNET	60, 71	23 %, 27 15/16	
	⇔SUPERPRO	••o Professional	RCH RS	85, 120, 160	33 %, 47 % , 63	
			RCH			
			HIT PLUS RS	160	63	
			HIT PLUS	120, 160, 180	47 ¼ , 63, 70 %	
			HIT N	85, 100, 120	33 1/16, 39 3/8, 47 1/4	
Antimimimimi			TS MAX	43, 57, 66, 75	16 15/16, 22 1/16, 26, 29 1/2	
45°			SPEED MAGNET	62, 72, 92	24 1/16, 28 3/8, 36 1/4	
	◇ PRO	• o Ocasional	SPEED N	62, 72, 92	24 1/16, 28 1/8, 36 1/4	
Fixed 0°/45°			FAST	65, 85	25 %,, 33 %,	
			STAR PLATINUM	51, 63	20 1/16, 24 13/16	
			STAR	42, 51, 63	16 %,, 20 %,, 24 13/16	
			PRACTIC	51, 61	20 1/16, 24 1/16	
			BASIC	60	24	





kg	lb		mm	inch	TILE	STONEWARE	PORCELAIN			
1500	3306.93	Adjusta- ble	21*	13/16	0	0	0			
1200	2645.54				0	0	0			
1000	2204.62		20*	13/16		· ·				
800	1763.7		15	%16						
950	2094.39		18	11/16	0	0	0			
	40044/		18	11/16	0	0	0			
900	1984.16				0	0	0			
			15	%6	0	0	0			
800	1763.7				0	0	0			
		Fixed			0	0	0			
		Fixed	15	%16	0	0				
								0	0	
			12	3/8	0	0				
					0	0				
			10	%	0	0				
					0					





























TZ

MAXIMUM POWER, THE MOST ADVANCED MANUAL CUTTER ON THE MARKET.

For intensive cutting of all types of ceramic tile, ideal for porcelain stoneware and extruded stoneware.

























- · Powerful breaking system (up to 1.500 kg), operable with just one hand.
- · Accurate with soft slider movements.
- · Large cutting capacity, up to 21mm thickness. Ideal for large format tiles*.
- · Robust with a foldable structure for high strength and easy transportation.
- Excellent performance breaking system: Clean cuts with soft motion.
- · Robust chassis, guides and breaking system.
- · Swivel square with central pivot for fast and accurate measurements in angle cutting.
- · Adjustable lateral stop for repetitive cuts.
- · Support base for excellent tile placement.
- Easy to transport: rubber wheels with bearings and handle.
- Interchangeable scoring wheels ranging from \varnothing 8mm –22mm.
- $\cdot \ \text{Includes } \varnothing \ 8 \ \text{mm SILVER} \ \text{and } \varnothing \ 22 \ \text{mm EXTREME scoring wheels.} \ \text{Reinforced textile bag for transport and protection.}$
- On models 1300/1550/1800: The reinforced textile bag of these models includes 2 built-in wheels.

















	REF.		\longleftrightarrow		and a			=	
TZ-850	17952	√ .	33 1/2" 85 cm	23 5/8x23 5/8" 60x60 cm	1/8-7/8" 3-21 mm	3306.9 lb 1500 kg	49.38304 lb 22,4 kg	1	9
TZ-1020	17951		40 1/8" 102 cm	27 1/2x27 1/2" 70x70 cm			54.23316 lb 24.6 kg		
TZ-1300	17953		51 1/8" 130 cm	35 3/8x35 3/8" 90x90 cm			66.138 lb 30 kg		
TZ-1550	17954		61 1/8" 155 cm	43 1/4x43 1/4" 110x110 cm			72.7518 lb 33 kg		6
TZ-1800	17924		70 7/8" 180 cm	47 1/4x47 1/4" 120x120 cm			79.938796 lb 36,26 kg		

*Some materials with a thickness greater than 9/16" [15 mm] may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibility and alternatively suggest cutting these types of material using an electric tile cutter.

ACCESSORIES



REF. 18980 Maintenance Kit



CRAFTING NEEDS INNOVATION



NEW TK TILE CUTTER

Meet the first asymmetric monoguide tile cutter worldwide

We know you work hard and you probably workout. But you don't need two strong arms when you have:

- Perfect visibility
- ·1500kg breaking power
- ·Breakage control
- ·Cut up to 21mm
- ·Incredibly smooth cut
- ·Great stability
- \cdot Easy transport and folding

VISIONARIES SEE FURTHER



Working smart is about optimising processes, simplifying them and looking for new ways to improve results. It often means breaking with the status quo and looking beyond it.

VISIONARIES SEE FURTHER





REVOLUTIONARY CUTTER WITH FORMIDABLE BREAKING POWER AND EXCEPTIONAL VISIBILITY OF THE SCORING LINE.

For intensive cutting of all types of ceramic tile, ideal for porcelain stoneware and extruded stoneware.























- · Pure Power. 1500kg maximum breaking force combined with a mechanism that allows to score and break with one hand.
- · Offset guide. Perfect visibility of the scoring wheel. Same visibility as RUBI double guide cutters.
- · Large cutting capacity, up to 21mm thickness. Ideal for large format tiles*.
- · Robust and foldable. The tandem "guide-chassis" gives the TK greater robustness and always reduces flexing of the assembly. The design of the machine in the folded position makes it easy to transport, both inside and outside the bag.
- Equipped with radial bearings for smoother and more accurate movement. Particularly suitable for heavy duty applications.
- · Closed profile extruded aluminium guide with chromed steel raceway.
- Die-cast aluminium guide supports.
- · Soft grip handle for improved ergonomics and comfort.
- $\boldsymbol{\cdot}$ 30 cm long side stop swivels from 45° to 90° for repeat cuts.
- · Rubber wheels and handle for easy transport.
- · Reinforced textile carrying case for transport, protection and durability.
- · Compatible with Secure Lock System (SLS) PLUS scoring wheels.
- \cdot Supplied with Ø8 SILVER PLUS and Ø22 EXTREME PLUS scoring wheels.















	REF.		\longleftrightarrow				ô	=	
TK-850	15956		33 1/2" 85 cm	23 5/8x23 5/8" 60x60 cm			56.2173 lb 25,5 kg		
TK-1020	15957	ام	40 1/8" 102 cm	27 1/2x27 1/2" 70x70 cm	1/8-7/8"	3306.9 lb	57.3196 lb 26 kg		
TK-1300	15958	V	51 1/8" 130 cm	35 3/8x35 3/8" 90x90 cm	3–21 mm	1500 kg	71.6495 lb 32,5 kg	-	-
TK-1600	15959		62 " 160 cm	43 1/4x43 1/4" 110x110 cm			74.9564 lb 34 kg		

*Some materials with a thickness greater than 9/16" [15 mm] may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibility and alternatively suggest cutting these types of material using an electric tile cutter.
**The pictures of this product might be slightly different to its final version.





TX-MAX

PROFESSIONAL MANUAL CUTTER WITH HIGH-PERFORMANCE MULTIPOINT BREAKER.

For intensive cutting of all types of ceramic tile, ideal for porcelain stoneware and extruded stoneware.























- · Highly precise scoring.
- · Entire system highly efficient.
- · Reinforced components. Heavy duty.
- · High breaking power (2646 lb) MASTER POWER. One-handed operation.
- Head with extra-long aluminium sliders with "self-lubricating" friction bearings.
- Portable breaker with aluminium pressure pad, equipped with plastic protector to avoid marking delicate surfaces. Better visibility of the scoring and cutting zone.
- The pressure pad is locked by a ratchet mechanism and is unlocked by the trigger, allowing one-handed scoring and breaking for faster use. Increases performance with both thin and thick materials.
- Injected-aluminium base, reinforced with a central rib, for increased strength.
- · Floating tables and supplementary arms for large-size ceramic tile, increasing cutting stability.
- · Rotating square, with central pivot point and lateral end stop. Greater precision in angle cuts.
- · Handle with soft grip for better ergonomics and comfort.
- Equipped with Ø5/16" (8 mm) SILVER and Ø 7/8" (22 mm) EX TREME scoring wheels. Compatible with the entire plus line of scoring wheels.
- · Includes a carrying case (the 1250 model is equipped with wheels to transport the machine).



















	REF.		\longleftrightarrow		(minus)	-		=	
TX-710 MAX	17909		27 " 71 cm	19 5/8x19 5/8" 50x50 cm			29.32118 lb 13,3 kg		
TX-1020 MAX	17915	√	40 1/8" 102 cm	27 1/2x27 1/2" 70x70 cm	1/8-7/8" 3-21 mm	2645.52 lb 1200 kg	42.76924 lb 19,4 kg	1	10
TX-1250 MAX	17921		49 1/4" 125 cm	33 1/2x33 1/2" 85x85 cm			57.3196 lb 26 kg		

^{*}There are some materials over 9/16" [15 mm] thick which, due to their physical properties, possible inner or surface tensions, are difficult to cut manually. It is recommended to make some sample cuts to determine the compatibility of the product.

ACCESSORIES









TP-S

SINGLE GUIDE WITH MULTIPOINT SEPARATOR AND ANGULAR MEASUREMENT.

Ideal for high quality cutting of ceramic and porcelain tiles.





















- · Guide system highly resistant to impacts resulting in longer product life.
- · Ergonomic handle with incorporated separator for greater speed and ease of use.
- \cdot Swivel bracket with central pivot for fast and accurate measurements.
- · Long-lasting laser engraved square.
- Reinforced pressure pad.
- 12 mm reinforced guide. Greater bending resistance and increased precision.
- · Lateral end stop for making repetitive precision cuts.
- Two-layer base with shock-absorbing effect. Base extension for large sizes. Carrying handle. (TP-66-S and TP-75-S).
- Assembly designed to be used by pushing the handle.
- · RUBIFLEX bi-material handle.
- \cdot Ø 22mm EXTREME scoring wheel included. (Ref. 01901).













	REF.	\longleftrightarrow		and .	1	aise		
TP-66 S	12954	25 " 66 cm	18 1/8x18 1/8" 46x46 cm			25.3529 lb 11,5 kg		17
TP-75 S	12956	29 1/2" 75 cm	20 7/8x20 7/8" 53x53 cm	1/4-3/4"	2204.6 lb	26.4552 lb 12 kg	1	12
TP-102 S	11900	40 1/8" 102 cm	27 1/2x27 1/2" 70x70 cm	5–20 mm	1000 kg	39.24188 lb 17,8 kg	1	,
TP-125 S	11973	49 1/4" 125 cm	33 1/2x33 1/2" 85x85 cm			54.0127 lb 24,5 kg		6

*Some materials with a thickness greater than 9/16" [15 mm] may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibility and alternatively suggest cutting these types of material using an electric tile cutter.

ACCESSORIES











TP-T

SINGLE GUIDE CUTTER WITH MULTIPOINT SEPARATOR AND ANGULAR MEASUREMENT.

Ideal for high quality cutting of ceramic and porcelain tiles.



















- · Single guide system highly resistant to impacts. Longer life.
- · Separator set with height adjustment. Optimum separation for each thickness.
- · Swivel bracket with central pivot for fast and accurate measurement of angular cuts.
- · Long-lasting laser engraved square.
- Reinforced pressure pad. 12 mm reinforced guide. Greater bending resistance and increased
- precision. Lateral end stop for making repetitive precision cuts. Two-layer base with shockabsorbing effect. Base extension for large sizes. Carrying handle. (TP-66-T and TP-75-T).
- · Assembly designed to be used by pulling the handle.
- RUBIFLEX bi-material handle. Ergonomic and heavy duty construction.
- Cut thickness adjustment system with 3 settings (6-9 mm/9-12 mm/12-20 mm)*, fast and precise.
- $\boldsymbol{\cdot}$ Ø 22mm EXTREME scoring wheel included (Ref. 01901).







	REF.	\longleftrightarrow		and		Ö		
TP-66 T	12955	25 " 66 cm	18 1/8x18 1/8" 46x46 cm			25.3529 lb 11,5 kg		
TP-75 T	12957	29 1/2" 75 cm	20 7/8x20 7/8" 53x53 cm	1/4-3/4"	2204.6 lb	26.4552 lb 12 kg	1	12
TP-102 T	11901	40 1/8" 102 cm	27 1/2x27 1/2" 70x70 cm	5–20 mm	1000 kg	36.15544 lb 16,4 kg	1	12
TP-125 T	11974 49 1/4" 125 cm		33 1/2x33 1/2" 85x85 cm			50.7058 lb 23 kg		

*Some materials with a thickness greater than 15 mm may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibility and alternatively suggest cutting these types of material using an electric tile cutter.

ACCESSORIES









TR-MAGNET

SUITABLE FOR DIAGONAL CUTS WITH A REVOLVING SQUARE FOR HIGH ACCURACY.

For intensive cutting of porcelain tiles and ceramic tiles.























- · Fast operating system with magnet, for one handed use.
- · Reinforced operating material. Increased breaking power.
- \cdot Revolving square with central pivot for fast and accurate measurements for cutting angles.
- · Floating base with shock absorber for better tile breaking.
- · Solid steel guides, Ø 20 mm, chrome-plated and rectified, with anti-corrosion treatment for increased torsional strength.
- · Multipoint breaker 800 kg of power.
- · Heavy-duty metal arms.
- · Handle reinforced with SOFT-GRIP.
- · Lateral end stop for making repetitive cuts.
- · Base extension for large sizes.
- Two-layer base with shock-absorbing effect.
- $\cdot \ \mathsf{High\text{-}strength} \ \mathsf{aluminium} \ \mathsf{base}.$
- Interchangeable scoring wheels from 6 to 22 mm.
- With Ø 10mm SILVER and Ø 22mm EXTREME scoring wheels and carrying case included.













Only compatible with LOCK SYSTEM SCORING WHEELS



	REF.		\longleftrightarrow		and a		Ġ	=	
TR-600 MAGNET	17905		23 5/8" 60 cm	16 1/2x16 1/2" 42x42 cm	1/8-5/8"	1763.68 lb	30.64394 lb 13,9 kg	2	18
TR-710 MAGNET	17906	V	27 " 71 cm	19 5/8x19 5/8" 50x50 cm	3–15 mm	800 kg	34.1713 lb 15,5 kg	1	15

ACCESSORIES










RCH / RCH RS

STURDIEST AND LIGHTEST CUTTER IN ITS CATEGORY.

For professional cutting of porcelain tiles and ceramic tiles.



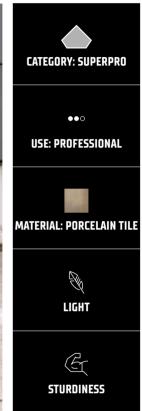

















- · Enhanced visibility. T-shaped guide allows user to see the scoring wheel from the top with minimum angle.
- · Increased stability. Double Side Stop to for large format tiles.
- $\cdot \ Ultra-light \ weight. \ The \ machine \ is \ full \ made \ in \ aluminium \ for \ enhanced \ transportability.$
- · Straightness regulation system.
- · One hand operated multipoint breaker with MAGNET system that increases the speed and precision in cutting. 950 Kg breaking power.
- · Die-casting slider with 4 riveted double ball bearings capable of resisting a high load.
- · Closed profile extruded aluminium guide with stainless steel raceway. Reduces both lateral and vertical bending improving cutting performance.
- · Die-cast aluminium guide supports.
- · Bi-material base Rubber.
- · Side stop for repetitive cuts at 90° and 45°.
- · Rubber wheels and handle for easy transport.
- Reinforced textile carrying case for transport, protection and durability.
- · Supplied with Ø22 EXTREME scoring wheel.
- · RS models Supplied with reinforced fixed square with magnet fixation and 30 cm long side stop for straight repetitive cuts.













	REF.	\longleftrightarrow				Ĉ	Ô	=	
RCH-850	27924	334 5/8"	23 5/8x23 5/8"			26.23474 lb 11,9 kg	31.9667 lb 14,5 kg		
RCH-850 RS	27921	850 cm	60x60 cm			28.43934 lb 12,9 kg	34.1713 lb 15,5 kg		
RCH-1200	27925	472 1/2"	33 1/2x33 1/2"	1/4-3/4"	2094.37 lb	39.46234 lb 17,9 kg	46.73752 lb 21,2 kg		
RCH-1200 RS	27922	1200 cm	85x85 cm	5-18 mm	950 kg	41.66694 lb 18,9 kg	48.94212 lb 22,2 kg		-
RCH-1600	27926	629 7/8"	44 1/2x44 1/2"			45.85568 lb 20,8 kg	55.55592 lb 25,2 kg		
RCH-1600 RS	27923	1600 cm	113x113 cm			48.06028 lb 21,8 kg	57.76052 lb 26,2 kg		

 $^{{}^\}star\!\mathsf{The}$ pictures of this product might be slightly different to its final version.

ACCESSORIES









HIT-PLUS / HIT-PLUS RS

FOR THE MOST DEMANDING JOBS ON ALL TYPES OF LARGE-FORMAT CERAMIC TILES.

For professional cutting of porcelain and ceramic tiles.

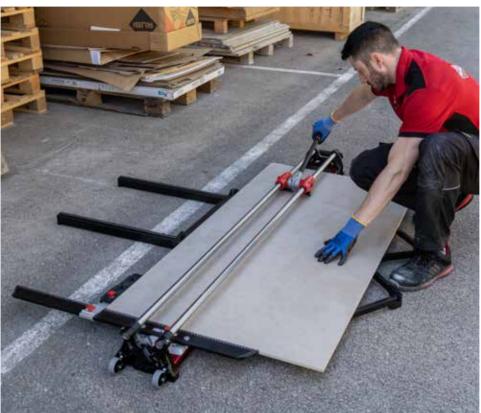

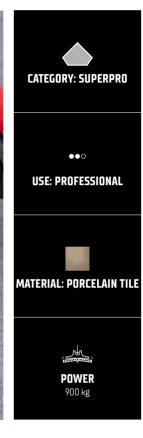

















- · Slider assembly with ball bearings for greater SMOOTHNESS and COMFORT during scoring.
- · MAGNET System. The pressure pad for scoring and breaking can be locked and unlocked with one hand. FASTER use and cutting accuracy.
- · Full view of the scoring and cutting area thanks to the forward position of the scoring wheel in front of the pressure pad.
- · Closed extruded aluminium structure base for greater RIGIDITY and cutting CAPACITY.
- · With HIGH performance moving breaker.
- · Ground, chrome-plated solid steel guides with anti-corrosion treatment, and 25 mm diameter for greater torsional strength.
- With a square that includes a side stop for repetitive and 45° cuts.
- Equipped with 4 additional aluminium arms for working with large ceramic tiles.
- Moving guides stop for adjusting the cut to the tile dimension.
- · Double tile support with accessory for cutting at 45°.
- · Handle with soft grip for better ERGONOMICS and COMFORT.
- Includes articulated arms to give more support to the ceramic.
- Wide range of scoring wheels adaptable to each material (6, 8, 10, 18 and 22 mm diameter). Includes Extreme 22 mm scoring wheel.
- Equipped with 2 wheels and grip for better tool movement.
- The RS version includes a reinforced square with magnet fixing.
- $\boldsymbol{\cdot}$ The 1600 mm long versions include wheels for easier transport.
- The bag includes wheels for 1200, 1600 and 1800 option.















Only compatible with LOCK SYSTEM SCORING WHEELS



	REF.		\longleftrightarrow		and a	-	ightharpoons			
HIT-1200 PLUS WITH BAG	27902	J	47 1/4" 120 cm	33 1/2x33 1/2" 85x85 cm			45.1943 lb 20,5 kg	55.996841b 25,4 kg		20
HIT-1600 PLUS RS WITH BAG	27903	V	62 " 160 cm	44 1/2X44 1/2" 113X113 cm			59.5242 lb 27 kg	71.6495 lb 32,5 kg		-
HIT-1200 PLUS	27900		47 1/4" 120 cm	33 1/2x33 1/2" 85x85 cm	1/8-3/4"	1984.14 lb	48.28074 lb 21,9 kg	56.43776 lb 25,6 kg	1	20
HIT-1600 PLUS	27909		62 "	39 3/8X39 3/8" 100X100 cm	3–18 mm	900 kg	48.5012 lb 22 kg		1	24
HIT-1600 PLUS RS	27901	_	160 cm	44 1/2X44 1/2" 113X113 cm			59.5242 lb 27 kg	- Ib - kg		
HIT-1800 PLUS	27916		70 7/8" 180 cm	50 x50 " 127x127 cm			60.097396 lb 27,26 kg			

ACCESSORIES









HIT-N

ROBUSTNESS AND PRECISION IDEAL FOR CUTTING PORCELAIN TILES.

For professional cutting of porcelain and ceramic tiles.

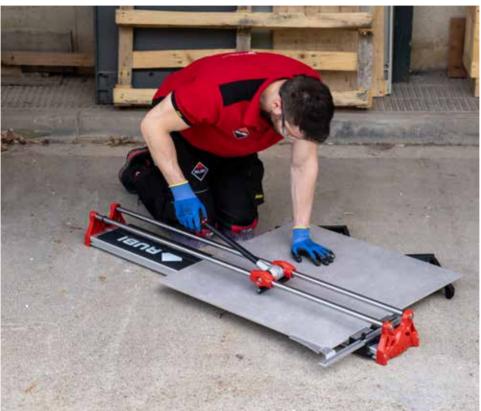

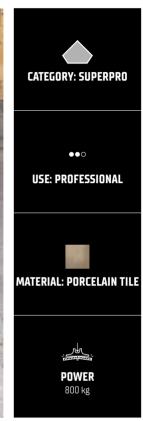

















- · With high performance moving breaker.
- · Slider assembly with ball bearings for greater smoothness and comfort during scoring.
- · Full view of the scoring and cutting area thanks to the forward position of the scoring wheel in front of the pressure pad.
- · Closed extruded aluminium structure base for greater rigidity and cutting capacity.
- · Ground, chrome-plated solid steel guides with anti-corrosion treatment, and 20 mm diameter for greater torsional strength.
- $\boldsymbol{\cdot}$ Guides fixed with clamps for greater rigidity.
- · With side stop for repetitive and 45° cuts.
- Equipped with 4 additional aluminium arms, for large-sized ceramic tiles.
- Handle with soft grip for better ergonomics and comfort.
- · Wide range of scoring wheels adaptable to each material (6, 8, 10, 18 and 22mm diameter).
- · Includes 22mm scoring wheel.
- Includes articulated arms to give more support to the ceramic.













Only compatible with LOCK SYSTEM SCORING WHEELS



	REF.		\longleftrightarrow		suines		ightharpoons	Ô	=	
HIT-1000 N WITH BAG	26999		39 3/8" 100 cm	27 1/2x27 1/2" 70x70 cm			27.491362 lb 12,47 kg	30.8644 lb 14 kg		-
HIT-1200 N WITH BAG	26962		47 1/4" 120 cm	33 1/2x33 1/2" 85x85 cm			33.113092 lb 15,02 kg	35.71452 lb 16,2 kg		24
HIT-850 N	26963		33 1/2" 85 cm	23 5/8x23 5/8" 60x60 cm	1/8-5/8" 3-15 mm	1763.68 lb 800 kg	24.69152 lb 11,20 kg		1	28
HIT-1000 N	26992	-	39 3/8" 100 cm	27 1/2x27 1/2" 70x70 cm			27.491362 lb 12,47 kg	- Ib - kg		-
HIT-1200 N	26961		47 1/4" 120 cm	33 1/2x33 1/2" 85x85 cm			31.19509 lb 14,15 kg			24

ACCESSORIES












TS-MAX

AUTHENTIC & ORIGINAL: LIGHTWEIGHT AND FUNCTIONAL WITH HIGH PERFORMANCE BREAKER.

For professional cutting of porcelain tiles and ceramic tiles.



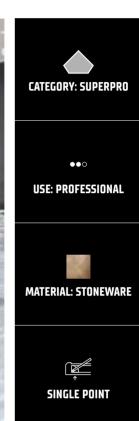

















- · Progressive breaking system "SMART POWER" adapts to different material hardness.
- · Wide base. Greater base surface for higher stability and cutting quality.
- · Reinforced components for heavy duty work. High durability.
- · Ergonomic handles. Maximum comfort.
- Bigger reinforced base for a higher comfort and better stability when cutting.
- Powerful single point breaker. Up to 800 kg breaking pressure.
- Double guide for direct view of scoring/cutting line.
- Chromed steel guides, rectified and calibrated, with anti-rust treatment.
- · Lateral stop for repetitive straight and 45° cuts.
- Interchangeable scoring wheels ranging from Ø 6mm to 22 mm.
- Includes Ø 8mm ENDURE and Ø 10 mm SILVER scoring wheels and a transport case with reinforced locks and hinges.













Only compatible with LOCK SYSTEM SCORING WHEELS



	REF.		\longleftrightarrow		and a	-		=	
TS-43 MAX	18920		16 7/8" 43 cm	11 3/4x11 3/4" 30x30 cm			19.40048 lb 8,8 kg		7/
TS-57 MAX	18921		22 1/2" 57 cm	15 3/4x15 3/4" 40x40 cm			21.82554 lb 9,9 kg		24
TS-66 MAX	18922		25 " 66 cm	18 1/8x18 1/8" 46x46 cm			29.54164 lb 13,4 kg		20
TS-75 MAX	18923	√	29 1/2" 75 cm	20 7/8x20 7/8" 53x53 cm	1/4-5/8" 6-15 mm	1763.68 lb 800 kg	33.28946 lb 15,1 kg	1	20
TS-43 MAX (GREY)	18972		16 7/8" 43 cm	11 3/4x11 3/4" 30x30 cm			19.40048 lb 8,8 kg		24
TS-66 MAX (GREY)	18974		25 " 66 cm	18 1/8x18 1/8" 46x46 cm			29.54164 lb 13,4 kg		30
TS-75 MAX (GREY)	18975		29 1/2" 75 cm	20 7/8x20 7/8" 53x53 cm			33.28946 lb 15,1 kg		20

ACCESSORIES






SPEED-MAGNET

IDEAL BALANCE BETWEEN ROBUSTNESS AND LIGHTNESS IN CERAMIC TILE CUTTING.

For professional cutting of porcelain tiles and ceramic tiles.

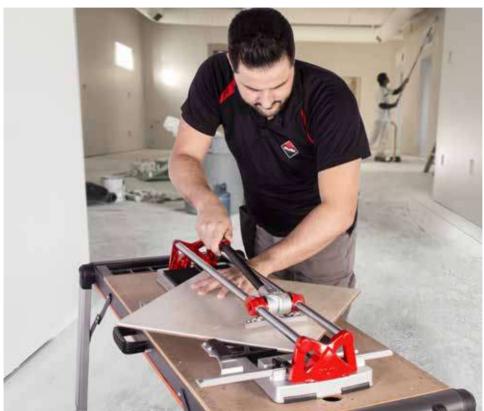



















- · Quick speed system with magnet, ideal for one-handed use. Easy and fast to use.
- · Great visibility during scoring.
- · Reinforced structured elements. High breaking power.
- \cdot Aluminium base for robustness. Light and easy to transport.
- · Solid 20mm steel guides. Chromed and rectified with anti-corrosion treatment for greater resistance to twisting.
- · Multipoint breaker 800kg power.
- Reinforced SOFT-GRIP handle.
- · Lateral stop for repetitive cuts and 45 degrees square.
- \cdot Interchangeable scoring wheels ranging between Ø 6mm-22mm.
- · Scoring wheel Ø 8mm ENDURE. included.
- Direct view of scoring and cutting line.
- 72/92 models:
- · -Aluminium lateral support.















Only compatible with LOCK SYSTEM SCORING WHEELS



	REF.		\longleftrightarrow			·	$^{\circ}$		=	
SPEED-62 MAGNET WITH CASE	14988		24 3/8" 62 cm	17 3/8x17 3/8" 44x44 cm			17.6368 lb 8 kg	25.3529 lb 11,5 kg	7	24
SPEED-72 MAGNET WITH CASE	14989	√	28 3/8" 72 cm	20 1/8x20 1/8" 51x51 cm			20.9437 lb 9,5 kg	29.98256 lb 13,6 kg	2	18
SPEED-92 MAGNET WITH CASE	14990		36 1/4" 92 cm	25 5/8x25 5/8" 65x65 cm	1/8-5/8"	1763.68 lb	26.4552 lb 12 kg	37.03728 lb 16,8 kg	1	10
SPEED-62 MAGNET	14980		24 3/8" 62 cm	17 3/8x17 3/8" 44x44 cm	3-15 mm	800 kg	17.6368 lb 8 kg		2	30
SPEED-72 MAGNET	14981	-	28 3/8" 72 cm	20 1/8x20 1/8" 51x51 cm			20.9437 lb 9,5 kg	- Ib - kg	1	35
SPEED-92 MAGNET	14982		36 1/4" 92 cm	25 5/8x25 5/8" 65x65 cm			26.4552 lb 12 kg		1	28

ACCESSORIES








SPEED-N

THE MOST VERSATILE TILE CUTTER IN IT'S RANGE.

For professional cutting of ceramic tiles, occasionally for porcelain tiles.



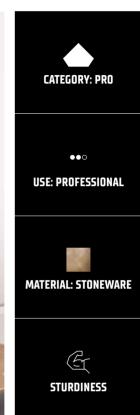











- · Reinforced structured elements. High breaking power.
- · Chromed and rectified steel guides, with anticorrosion treatment. Higher durability.
- $\cdot \ \textbf{Aluminium base for higher robustness}.$
- · Light and easy to transport.
- With lateral stop for repetitive cuts and 45 degree squares.
- Interchangeable scoring wheels ranging between \varnothing 6mm to 10mm.
- Scoring wheel Ø 8 mm SILVER included.
- Direct vision of scoring and cutting line.
- · 72/92 models;
- \cdot -Aluminium lateral support.













	REF.		\longleftrightarrow		and a	ightharpoons		=	
SPEED-62 N WITH CASE	14985		24 3/8" 62 cm	17 3/8x17 3/8" 44x44 cm		15.4322 lb 7 kg	23.36876 lb 10,6 kg	7	24
SPEED-72 N WITH CASE	14986	√	28 3/8" 72 cm	20 1/8x20 1/8" 51x51 cm		18.07772 lb 8,2 kg	27.5575 lb 12,5 kg	2	18
SPEED-92 N WITH CASE	14987		36 1/4" 92 cm	25 5/8x25 5/8" 65x65 cm	1/4-5/8"	24.2506 lb 11 kg	35.05314 lb 15,9 kg	1	10
SPEED-62 N	14975		24 3/8" 62 cm	17 3/8x17 3/8" 44x44 cm	5-15 mm	15.4322 lb 7 kg	23.36876 lb 10,6 kg	2	30
SPEED-72 N	14976	-	28 3/8" 72 cm	20 1/8x20 1/8" 51x51 cm		18.07772 lb 8,2 kg	27.5575 lb 12,5 kg	1	40
SPEED-92 N	14977	4977	36 1/4" 92 cm	25 5/8x25 5/8" 65x65 cm		24.2506 lb 11 kg	35.05314 lb 15,9 kg		28

ACCESSORIES










FAST

LIGHT AND VERSATILE CUTTER.

For professional cutting of ceramic tiles.



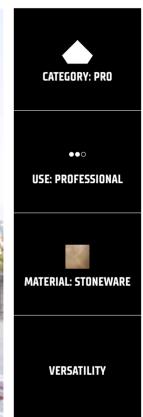













- · Extruded aluminium base.
- · New rigid and stable separator.
- \cdot Reinforced 18mm guides for greater resilience.
- · Four side brackets for a great additional support.
- · Wider foam base.
- $\boldsymbol{\cdot}$ Chromed steel guides with anti-rust treatment.
- · Lateral stop with 45° square.
- · Base for greater support of the tile.
- Interchangeable scoring wheels from $\varnothing 1/4$ "(6mm) to 11/16" (18mm).
- \cdot Ø1/4" (6mm) SILVER scoring wheel included.
- \cdot Two-layer base with shock absorption.
- Direct view of the scoring and cutting line.















Only compatible with LOCK SYSTEM SCORING WHEELS



	REF.		\longleftrightarrow		and a	ightharpoons			
FAST-85 WITH BAG	13939	√	33 1/2" 85 cm	23 5/8x23 5/8" 60x60 cm		16.5345 lb 7,5 kg	18.7391 lb 8,5 kg	2	32
FAST-65	13940		25 5/8" 65 cm	17 3/4x17 3/4" 45x45 cm	1/2" 12 mm	13.88898 lb 6,3 kg	- Ib	4	48
FAST-85	13941	_	33 1/2" 85 cm	23 5/8x23 5/8" 60x60 cm		16.5345 lb 7,5 kg	- kg	2	32

ACCESSORIES













STAR PLATINUM

LIGHT AND VERSATILE CUTTER.

For professional cutting of ceramic tiles, occasionally for porcelain tiles.

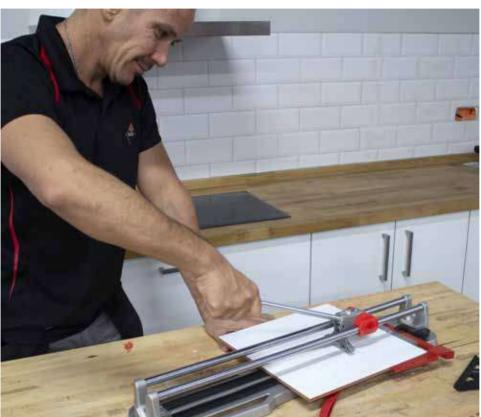

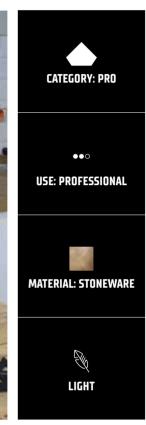














- · Aluminium tool holder, more RIGID and STABLE for EASIER tile scoring.
- · Cast aluminium base, LIGHT and STRONG with side extensions for large pieces.
- · Cast ALUMINIUM guide supports for greater ROBUSTNESS.
- Dual guide for greater VISIBILITY of the scoring and cutting line.
- $\boldsymbol{\cdot}$ Solid, chromed, ground and calibrated steel guides with anti-corrosion treatment.
- Side stop with millimetre scale and 45° square.
- Interchangeable scoring wheels from Ø1/4"(6mm) to 3/8" (10mm).
- \cdot Ø 6 mm SILVER scoring wheel included.













	REF.		\longleftrightarrow		aning)	ightharpoons		=	
STAR-63 PLATINUM WITH CASE	15904	√	24 3/4" 63 cm	17 3/4X17 3/4" 45X45 cm		9.678194 lb 4,39 kg	13.315784 lb 6,04 kg	4	48
STAR-51 PLATINUM	15901		20 1/8" 51 cm	14 1/8X14 1/8" 36X36 cm	1/2" 12 mm	8.289296 lb 3,76 kg	- Ib	,	-
STAR-63 PLATINUM	15902	_	24 3/4" 63 cm	17 3/4X17 3/4" 45X45 cm		9.678194 lb 4,39 kg	- kg	6	72

ACCESSORIES












STAR

LIGHT AND VERSATILE CUTTER.

For occasional cutting of ceramic tile and cutting of porcelain tiles.



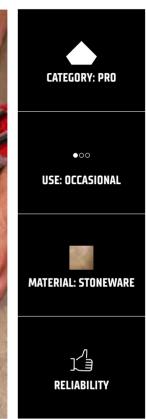









- \cdot Closed sliding mobile breaker for greater bending strength.
- · New support reinforced for durability and power separation.
- \cdot Chromed steel guides with anti-rust treatment for greater durability.
- · Base for correct support of the tile.
- Interchangeable scoring wheels from Ø1/4" (6mm) to 3/8" (10mm).
- Ø1/4" (6mm) SILVER scoring wheel included.
- Two-layer base with shock absorption.
- · Direct view of the scoring and cutting line.













	REF.		\longleftrightarrow		animal .	Ċ		=	
STAR-42 WITH CASE	14946		16 1/2" 42 cm	11 3/4x11 3/4" 30x30 cm		7.49564 lb 3,4 kg	10.58208 lb 4,8 kg		
STAR-51 WITH CASE	14947	√	20 1/8" 51 cm	14 1/8x14 1/8" 36x36 cm		8.15702 lb 3,7 kg	12.34576 lb 5,6 kg	4	48
STAR-63 WITH CASE	14948		24 3/4" 63 cm	17 3/4x17 3/4" 45x45 cm	1/2"	9.47978 lb 4,3 kg	14.3299 lb 6,5 kg		
STAR-42	14943		16 1/2" 42 cm	11 3/4x11 3/4" 30x30 cm	12 mm	7.49564 lb 3,4 kg			
STAR-51	14944	-	20 1/8" 51 cm	14 1/8x14 1/8" 36x36 cm		8.15702 lb 3,7 kg	- Ib - kg	6	72
STAR-63	14945		24 3/4" 63 cm	17 3/4x17 3/4" 45x45 cm		9.47978 lb 4,3 kg			

ACCESSORIES








PRACTIC

IDEAL FOR SMALL RENOVATIONS AND LIGHT WORK.

For ocassional cutting ceramic wall and floor tiles.



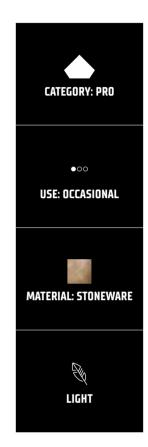

















- \cdot Movable breaker, ideal for diagonal cuts.
- · Aluminium guide supports for greater rigidity.
- \cdot Lateral end stop for repetitive cuts.
- $\boldsymbol{\cdot}$ Interchangeable scoring wheels to adapt to each material.
- · Chromed steel guides and aluminium support.
- · Mobile breaker with Ø1/4"(6mm) SILVER scoring wheel included.
- Interchangeable scoring wheels $\varnothing 1/4$ "(6mm) to 3/8"(10mm) for cutting different materials.

	REF.	\longleftrightarrow		animal .	Ċ	=	
PRACTIC-51	24984	20 1/8" 51 cm	14 1/8x14 1/8" 36x36 cm	3/8"	6.39334 lb 2,9 kg	,	77
PRACTIC-61	24985	24 1/8" 61 cm	16 7/8x16 7/8" 43x43 cm	10 mm	10.80254 lb 4,9 kg	0	/2







BASIC

IDEAL FOR SMALL RENOVATIONS AND LIGHT WORK.

For ocassional cutting ceramic floor tiles.





















- \cdot Base, guide & supports in steel and aluminium.
- Mobile breaker and Ø9/16"(14mm) SILVER Tungsten Carbide scoring wheel included.
- · Also comes with lateral stop and 45° square.

	REF.	\longleftrightarrow			ightharpoons	=	
BASIC-60	25956	24 1/8" 61 cm	16 7/8x16 7/8" 43x43 cm	3/8" 10 mm	7.7161 lb 3,5 kg	6	72







SCORING WHEELS

	TILE TYPE									
TILE SURFACE		NIC WALL	CERAMIC FLOOR Bila - Bilb		POR	CELAIN Bla		ARRY - Allb - Alli		
Smooth polished	6 mm • ½" 8 mm • ½" 10 mm • ½" 18 mm • ½"	Silver* Silver/Endure Silver/Gold Silver			6 mm • ½" 8 mm • ½" 10 mm • ½" 18 mm • ¾"	Silver Silver/Endure* Silver/Gold Silver				
Smooth Matt	6 mm • ¼" 8 mm • %;" 10 mm • %" 18 mm • ¾" 22 mm • ½"	Silver* Silver/Endure Silver/Gold Silver Silver/Extreme	6 mm • ¼" 8 mm • ¾" 10 mm • ¾" 18 mm • ¾" 22 mm • ¾"	Silver Silver/Endure Silver/Gold* Silver Silver/Extreme	6 mm • ½" 8 mm • ½" 10 mm • ½" 18 mm • ½" 22 mm • ½"	Silver Silver/Endure* Silver/Gold Silver Silver/Extreme	8 mm • %;" 10 mm • %;" 18 mm • %;" 22 mm • %;"	Silver/Endurr Silver/Gold Silver* Silver/Extrem		
Textured	8 mm • ¾." 18 mm • ¾." 22 mm • %"	Silver/Endure* Silver Silver/Extreme	8 mm • ¾." 18 mm • ¾." 22 mm • %"	Silver/Endure Silver* Silver/Extreme	8 mm • 1/4" 18 mm • 1/4" 22 mm • 1/4"	Silver/Endure Silver* Silver/Extreme	18 mm • ¾" 22 mm • %"	Silver* Extreme		
Highly textured	8 mm • 1/4." 18 mm • 1/4" 22 mm • 1/4"	Endure Silver Extreme*	8 mm • ¾." 18 mm • ¾" 22 mm • ¾"	Endure Silver Extreme*	8 mm • 1/4" 18 mm • 1/4" 22 mm • 1/4"	Endure Silver Extreme*	18 mm • ¾" 22 mm • %"	Silver Extreme*		
Structured	8 mm • ½;" 18 mm • ½;" 22 mm • ½;"	Endure Silver Extreme*	8 mm • ½;" 18 mm • ½" 22 mm • ½"	Endure Silver Extreme*	8 mm • 1/4." 18 mm • 1/4" 22 mm • 1/4"	Endure Silver Extreme*	18 mm • ¾" 22 mm • ¾"	Silver Extreme*		





			ı	_	_	_		PRO	_	_	_		△ SUF				PREM	
	D	Re	afe:	1945	1958	1959	5 L	VER 1991	1960	1950	1992	1949)LD 1993	1906	1903	1901	XTREN 1907	1 900
		Ø m Ø ind	nm:	6 1/4	8 5⁄16	8 5/16 PLUS	10 3/8	10 3/8 PLUS	14 %6	18 3/4	18 3/ ₄ PLUS	10 3/8	10 3/8 PLUS	8 5/16	8 5/16 PLUS	22 1/8	22 %	22 ½ PLUS
MU	Ne Ve	TZ				0		0			0		0		0			0
PREMIUM	••• Intensive	тк				0		0			0		0		0			0
♦		TX MAX				0		0			0		0		0			0
		TP														0		
		TR MAGNET		0	0		0			0		0		0			0	
		RCH RS														0		
SUPERPRO	•• o Professional	RCH HIT PLUS RS		o	0		o			0		0		0		0	0	
Sur	••• Prof	HIT PLUS		0	0		0			0		0		0			0	
		HIT N		0	0		0			0		0		0			0	
		TS MAX		0	0		0			0		0		0			0	
		SPEED MAGNE	ΞT	0	0		0			0		0		0			0	
		SPEED N		0	0		0					0		0				
		FAST		0	0		0			0		0		0			0	
◇ PRO	• co Ocasional	STAR PLATINUI	М	0	0		0					0		0				
	0000	STAR		0	0		0					0		0				
		PRACTIC		0	0		0					0		0				
		BASIC							0									





PREMIUM SCORING WHEELS

• PLUS SCORING WHEELS FOR TX-MAX, TK & TZ PROFESSIONAL CUTTERS.

PATENTED





8MM PLUS SILVER SCORING WHEEL

- For ceramic wall, ceramic floor and porcelain, ideal for tiles with smooth and slightly textured surfaces.
- Tungsten carbide scoring wheel of high resistance and durability.
- Patented geometry shaft, for maximum precision and minimum vibration.

	REF.		
8 MM PLUS SCORING WHEEL SILVER	01959	10	3600



8MM PLUS SCORING WHEEL (05/16") ENDURE

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for smooth, textured and Highly textured surfaces.
- · Wheel made of tungsten carbide.
- · Patented geometry shaft, for maximum precision and minimum vibration.
- · Extra-long life.

	REF.		
8MM PLUS SCORING WHEEL (05/16") ENDURE	01903	10	=



10MM PLUS SILVER SCORING WHEEL (03/8")

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for smooth and slightly textured surfaces.
- Tungsten carbide scoring wheel of high resistance and duration.
- Shaft made with a patented geometry for a maximum precision and minimum vibration.

	REF.	=	
10 MM PLUS SCORING WHEEL	01991	10	3600



10MM PLUS GOLD SCORING WHEEL (013/32")

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for non-slip surfaces.
- Tungsten carbide scoring wheel with a superficial titanium treatment.
- Shaft made with a patented geometry for a maximum precision and minimum vibration.
- · Long-lasting.

	REF.		
10MM PLUS GOLD SCORING WHEEL (013/32")	01993	10	3600



SILVER

18MM PLUS SILVER SCORING WHEEL (03/4")

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for Highly textured.
- Tungsten carbide scoring wheel of high resistance and duration.
- Shaft made with a patented geometry for a maximum precision and minimum vibration.

	REF.		
18 MM PLUS SCORING WHEEL	01992	10	3600







22MM SCORING WHEEL PLUS EXTREME(0 7/8")

- For ceramic walls, ceramic floor, porcelain and rustic ceramic floor, ideal for Highly textured and structured surfaces.
- Tungsten carbide scoring wheel with a superficial titanium treatment.
- · Mounted on bearing. Enhanced smooth user perception.
- · Extra-long life.

	REF.	-	
22MM SCORING WHEEL PLUS EXTREME (0 7/8")	01900	10	-

SUPERPRO SCORING WHEELS

· ADAPTABLE SCORING WHEEL FOR TP, TQ & RCH PROFESSIONAL CUTTERS.





EXTREME

22MM SCORING WHEEL PLUS EXTREME (0 7/8") TP/TQ/RCH/SLAB CUTTER

- · For sharp cuttings in hard ceramic and porcelain tiles.
- · Tungsten Carbide scoring wheel with a superficial Titanium treatment.
- · Mounted on bearing. Enhanced smooth user perception.
- Extra-long life.

	REF.		
22MM SCORING WHEEL PLUS EXTREME (0 7/8") TP/TQ/ RCH/SLAB CUTTER	01901	5	-







SUPERPRO SCORING WHEELS

· FOR TS-MAX, TR-MAGNET, HIT, HIT-PLUS, HIT-PLUS RS & SPEED-MAGNET

PATENTED





6MM SILVER SCORING WHEEL (01/4")

- · For ceramic wall, ceramic floor and porcelain, ideal for tiles with smooth and slightly textured surfaces
- Tungsten carbide scoring wheel of high resistance and durability.
- · Lock system patented model with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF.	=	
6MM SCORING WHEEL (01/4") SILVER	01945	10	4400



8MM SILVER SCORING WHEEL (05/16")

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for smooth and slightly textured surfaces.
- Tungsten carbide scoring wheel of high resistance and durability.
- · Lock system patented model with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF.		
8MM SCORING WHEEL (05/16") SILVER	01958	10	4400



	REF.	=	
8MM SCORING WHEEL (05/16") SILVER	01958	10	4400



8MM ENDURE SCORING WHEEL (05/16")

- · For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for smooth, textured and Highly textured surfaces.
- · Wheel made of tungsten carbide.
- · Lock system patented geometry shaft, for maximum precision and minimum vibration.
- · Extra-long life.

	REF.		
8MM SCORING WHEEL (05/16") ENDURE	01906	10	=



10MM SILVER SCORING WHEEL (03/8")

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for smooth and slightly textured surfaces.
- Tungsten carbide scoring wheel of high resistance and durability.
- Lock system patented handle made with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF.		
10MM SCORING WHEEL (03/8") SILVER	01946	10	4400



10MM GOLD SCORING WHEEL (03/8")

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for non-slip surfaces.
- Tungsten carbide scoring wheel with a superficial titanium treatment.
- · Lock system patented handle made with new high technology RUBI® alloy; maximum precision and resistant to wear. Long-lasting.

	REF.	=	
SCORING WHEEL 03/8" (10MM) GOLD	01949	10	4400





18MM SILVER SCORING WHEEL (03/4")

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for Highly textured.
- Tungsten carbide scoring wheel of high resistance and durability.
- Lock system patented shaft geometry; maximum precision and minimum vibration.
- · Compatible with FAST cutters.

	REF.		
SCORING WHEEL 03/4" (18MM) SILVER	01950	10	3600



EXTREME

SILVER

CATEGORY:

22MM SCORING WHEEL (07/8") EXTREME

- For ceramic walls, ceramic floor, porcelain and rustic ceramic floor, ideal for Highly textured and structured surfaces.
- · Tungsten carbide scoring wheel with a superficial titanium treatment.
- Patented lock system geometry shaft, for maximum precision and minimum vibration.
- · Patented model for maximum precision and minimum vibration.
- · Extra-long life.
- · Compatible with FAST cutters.

	REF.		
SCORING WHEEL 07/8"(22MM) EXTREME	01907	10	-



6MM SILVER SCORING WHEEL SET (01/4")

- Tungsten carbide scoring wheel of high resistance and durability.
- Shaft made with a patented geometry for a maximum precision and minimum vibration.
- Shaft made patented lock system with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF.		
6MM SCORING WHEEL SET (0 1/4") SILVER	01947	10	4400



6MM (01/4") & 10MM (03/8") SCORING WHEELS SET

- Tungsten carbide scoring wheel of high resistance and durability.
- Shaft made patented lock system with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF.	=	
6MM (01/4") & 10MM (03/8") SILVER SCORING WHEELS SET	01948	10	3600







SCORING WHEEL SETS

SETS OF SCORING WHEELS OF DIFFERENT DIAMETERS WITH BOX.





SILVER



SCORING WHEEL SET 2

- For TS-MAX, TR-MAGNET, TF-MAX & SPEED-MAGNET models, includes 1 scoring wheel of \varnothing 1/4" (6mm),
- Ø5/16" (8mm), Ø3/8" (10mm), Ø7/8" (18mm) (2 units) SILVER.
- · In plastic box with transparent cover.
- · Supplied in blister.

	REF.		
SCORING WHEEL SET 2	01996	5	450

PRO SCORING WHEELS

SILVER

 SELECTION OF SCORING WHEELS FOR SPEED-N, FAST, STAR-MAX, STAR, POCKET & PRACTIC MANUAL CUTTERS.

<u>PATENTED</u>








6MM SILVER SCORING WHEEL (01/4")

- For ceramic wall, ceramic floor and porcelain, ideal for tiles with smooth and slightly textured surfaces.
- \cdot Tungsten carbide scoring wheel of high resistance and durability.
- \cdot Lock system patented model with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF.	-	
6MM SCORING WHEEL (01/4") SILVER	01945	10	4400



8MM SILVER SCORING WHEEL (05/16")



- Tungsten carbide scoring wheel of high resistance and durability.
- Lock system patented model with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF.	=	
8MM SCORING WHEEL (05/16") SILVER	01958	10	4400





8MM ENDURE SCORING WHEEL (05/16")

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for smooth, textured and Highly textured surfaces.
- · Wheel made of tungsten carbide.
- Lock system patented geometry shaft, for maximum precision and minimum vibration.
- · Extra-long life.

	REF.	=	
8MM SCORING WHEEL (05/16") ENDURE	01906	10	-







10MM SILVER SCORING WHEEL (03/8")

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for smooth and slightly textured surfaces.
- Tungsten carbide scoring wheel of high resistance and durability.
- Lock system patented handle made with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF.	=	
10MM SCORING WHEEL (03/8") SILVER	01946	10	4400



SILVER

SILVER

SILVER

6MM SILVER SCORING WHEEL SET (01/4")

- · Tungsten carbide scoring wheel of high resistance and durability.
- Shaft made with a patented geometry for a maximum precision and minimum vibration.
- Shaft made patented lock system with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF.	<u>-</u>	
6MM SCORING WHEEL SET (0 1/4") SILVER	01947	10	4400



6MM (01/4") & 10MM (03/8") SCORING WHEELS SET

- Tungsten carbide scoring wheel of high resistance and durability.
- Shaft made patented lock system with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF.	=	
6MM (01/4") & 10MM (03/8") SILVER SCORING WHEELS SET	01948	10	3600



14MM SILVER SCORING WHEEL (09/16")

- $\boldsymbol{\cdot}$ For BASIC, KIT and TEN-BRIC tile cutters.
- $\boldsymbol{\cdot}$ Wheel made of Tungsten Carbide.

	REF.	=		
14MM SILVER SCORING WHEEL (09/16")	01960	10	4600	





ACCESSORIES FOR MANUAL TILE CUTTERS







MAINTENANCE KIT

• Cleaning, lubricating & maintenance oil suitable for regular maintaining of cutter parts that are regularly used; guides, sliding system, tilted axes, spiral, metallic surfaces.

	REF.	=	
MAINTENANCE KIT	18980	8	640

NIPPERS

 \cdot WIDE RANGE OF PLIERS FOR CUTTING CERAMICS, PORCELAIN & GLASS.







NIPPERS FOR PORCELAIN TILES

• Specially for cutting narrow strips of a maximum of 7/16" (1 cm). Equipped with tungsten carbide GOLD scoring wheels with titanium surface treatment for longer useful life. By means of a gentle turn, the wheels can be repositioned when their vertex starts getting worn. If totally worn, they can be replaced using their corresponding spare piece, Ø 3/4" (18 mm) GOLD spare scoring wheel long-life (Ref.01953).

	REF.	=	
NIPPERS FOR PORCELAIN TILES	83942	5	765



NIPPERS FOR CERAMIC TILES

- · Tungsten Carbide Edge.
- $\boldsymbol{\cdot}$ Ideal for the rectification of straight cut on ceramics.
- $\boldsymbol{\cdot}$ Bi-material handle Ergonomic.

	REF.	=	
NIPPERS FOR CERAMIC TILES	65926	6	-







NIPPERS FOR GLASS MOSAIC

- · Tungsten Carbide Edge.
- · Ideal for the rectification of glass mosaic tiles.
- · Bi-material handle Ergonomic.

	REF.		
NIPPERS FOR GLASS MOSAIC	71970	5	-





TILER NIPPERS

- · Tungsten Carbide Pliers.
- · Ideal for rectification of holes in ceramics.
- · Bi-material handle Ergonomic.

	REF.		
PARROT NIPPERS	65925	5	765

MANUAL CUTTERS FOR BUILDING MATERIALS

FOR DIFFERENT TYPES OF BUILDING MATERIALS.







CELLULAR CONCRETE SAW

- · Saw with 29 Tungsten Carbide teeth.
- · Length: 29" (75cm).
- · Beechwood and varnished handle.

	REF.	=	
CELLULAR CONCRETE SAW	70930	2	-





SLAB SYSTEM CUTTING AND HANDLING LARGE-SIZED TILE

Cutting large tile Handling large tile Installing large tile





SLAB CUTTER G3

MANUAL CUTTING SYSTEM WITH CONNECTABLE GUIDES.

For manual cutting of large porcelain tiles.













- · System with movable suction cups integrated in the guides. Special grey rubber suction cups for rough surfaces that won't leave marks on the tile.
- · Carriage with lever mechanism for perfect scoring. Extreme roller guide.
- · Highly reinforced guides. Easily interconnected by means of an adjustable lever mechanism.
- · Transport bag with padded handles and pockets for accessories.
- Breaking system by adjustable nippers with soft-grip handle, which facilitates and ensures progressive breaking of the tile, thus reducing the risk of cracking. 2-in-1 nippers and breaker.
- Ø 22 mm RUBI EXTREME roller guide made of Tungsten Carbide with Titanium Carbide treatment and bearings, to offer better scoring performance and quality.
- · Each set contains: Three 112 cm guides, 1 marker carriage with 22 mm roller guide, 1 set of nippers and 6 suction cups.
- · Transport bag with padded handles and pockets for accessories.











	REF.		\longleftrightarrow	and)	Ċ	*	=	
SLAB CUTTER G3	16900	V	125 " 320 cm	1/8-1/2" 3-12 mm	24.2506 lb 11 kg	37.4782 lb 17 kg	1	9

The Slab Breaker Plus (ref. 18917) must be used for thicknesses from 10 mm to 20 mm.





REF. 18917 Slab Breaker Plus



REF. 16929 Angle grinder accessory



REF. 28916 Slab Pliers







SLIM CUTTER G2

HAND CUTTING SYSTEM WITH CONNECTABLE GUIDES.

For hand cutting of large porcelain tiles with thicknesses between 3 and 10 mm.













- · High-scoring power thanks to the new tilting carriage design and its fixing on the reinforced guides.
- · Maximum 360 cm cutting capacity (extendable) thanks to its connectable guides. Allows a 120 cm cut with a single guide.
- Excellent fixing of the guides on the tile by means of 3 natural rubber suction cups, suitable for rough surfaces, with double anchoring point.
- · It prevents tile breakage by means of the progressive breaking system of the adjustable nippers with soft-grip handle. 2-in-1 nippers and breaker.
- Recommended thicknesses between 3 and 10 mm.
- · Specially designed for large tiles, it provides a perfect cut without chipping with a light and easy-to-store cutter.
- High durability of the 22 mm RUBI EXTREME scoring wheel. Manufactured in tungsten carbide with tungsten carbide treatment and bearings, it offers better performance and high scoring quality.
- Easily transportable. It includes two practical reinforced transport bags with compartments, handles and a shoulder strap. These can be transported separately or together with the use of a simple connecting system.
- Each set contains: Two 155 cm guides, one 65 cm guide, 1 marker carriage with 22 mm roller guide, 1 set of nippers, 3 suction cups, 1 Allen key and 2 transport bags.



#









	REF.		\longleftrightarrow	and a	Ĉ	=	
SLIM CUTTER G2	23999	V	141 3/4" 360 cm	3/8" 10 mm	22.70738 lb 10,3 kg	1	-

ACCESSORIES



REF. 18917 Slab Breaker Plus



Slim Cutter G2 Supplement Guides



TC-125 G2 circular cutter kit








TC-125 G2 CIRCULAR CUTTER KIT

THE LIGHT AND PRECISE LARGE FORMAT CUTTER

For cutting ceramic and porcelain tiles. Suitable for use with natural and synthetic stone. Especially suitable for large format tiles.



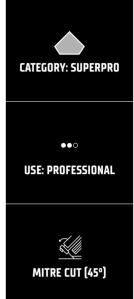















- · Includes a set of suction cups suitable for all surfaces for fixing the guide to the part.
- · Equipped with a carbon steel slide on adjustable double set stainless steel radial bearings.
- · Double dust reduction/control system. Dry and wet cutting.
- · Height-adjustable cutting head (saw effect), hinged from 0° to 45°. (mitre). FAST adjustment system.
- · More ergonomic. Additional BI-MATERIAL handle, mainly for mitre cuts.
- · Compatible with discs of 125 or 115 mm diameter. (Suitable for discs with reinforcement plate).
- Switch with SAFETY lock. Prevents UNINTENTIONAL start-up. Electrical cable with PRCD.
- Direct connection to vacuum cleaner. Includes adapter for other models and brands (37, 42 and 50 mm diameter).
- Quick connection and regulating valve for hose (16 mm diameter). Rubber stopper for suction outlet. IMPROVES ergonomics during wet cutting.
- Cast aluminium disc protector with transparent polycarbonate cover with quick opening and closing system. FACILITATES disc change and MINIMISES the projection of particles and water.
- Tilting side guard for mitre cuts. REDUCES water splashing and IMPROVES dust suction.
- Each set contains: 2 155 cm guides, 1 65 cm guide, 1 TC-125 cutter, 1 Ø125 disc, 2 fixing suction cups, 2 clamps, 2 spacers, 2 plates for reinforced discs (normal and thin), 1 vacuum cleaner adapter, 1 carry case and 1 carrying bag. FACILITATES transport and handling.



#









	REF.		5	RPM	W	\longleftrightarrow	and a	, dillin	Q	(i)				
TC-125 G2 CIRCULAR CUTTER KIT	220-240	V 50-60H	Ηz											
TC-125 G2	51951	V	220-240V 50-60Hz	11300	1250 1250 W	∞" ∞ cm	3/4-" 20-25 mm	1/2-3/4" 14-18 mm	4 1/2-4 7/8" 115-125 mm	7/8" 22,2 mm	14 1/8x9 5/8x8 1/4" 36x24,5x21 cm	22.046 lb 10 kg	1	16
SET OF GUIDES FOR TC-125 G2	51949	√				125 " 320 cm						29.7621 lb 13,5 kg	1	24
TC-125 G2 CIRCULAR CUTTER KIT	220-240	V 50-60H	łz											
TC-125 G2 UK	51967	√	220-240V 50-60Hz	11300	1250 1250 W	∞" ∞ cm	3/4-" 20-25 mm	1/2-3/4" 14-18 mm	4 1/2-4 7/8" 115-125 mm	7/8" 22,2 mm	14 1/8x9 5/8x8 1/4" 36x24,5x21 cm	22.046 lb 10 kg	1	-
SET OF GUIDES FOR TC-125 G2	51949	V				125 " 320 cm						29.7621 lb 13,5 kg	1	24
TC-125 G2 CIRCULAR CUTTER KIT	110-130\	/50-60H	Z											
TC-125 G2 USA	51977	√	110-130V 50-60Hz	11300	1250 1250 W	∞" ∞ cm	3/4-" 20-25 mm	1/2-3/4" 14-18 mm	4 1/2-4 7/8" 115-125 mm	7/8" 22,2 mm	14 1/8x9 5/8x8 1/4" 36x24,5x21 cm	22.046 lb 10 kg	1	-
SET OF GUIDES FOR TC-125 G2	51949	√				125 " 320 cm						29.7621 lb 13,5 kg	1	24
TC-125 G2 CIRCULAR CUTTER KIT	110-130V	/ 50-60H	Z											
TC-125 G2 UK	51987	V	110-130V 50-60Hz	11300	1250 1250 W	∞" ∞ cm	3/4-" 20-25 mm	1/2-3/4" 14-18 mm	4 1/2-4 7/8" 115-125 mm	7/8" 22,2 mm	14 1/8x9 5/8x8 1/4" 36x24,5x21 cm	22.046 lb 10 kg	1	-
SET OF GUIDES FOR TC-125 G2	51949	V				125 " 320 cm						29.7621 lb 13,5 kg	1	24

The kit is a cutter reference plus the guide reference (Ref.51949). It must be used with the SLIM SYSTEM G2 guides.





REF. Slim Cutter G2 Supplement Guides



REF. 27911 Slim Cutter G2 Head




REF. 28916 Slab Pliers

ANGLE GRINDER ACCESSORY G3

G3 ELECTRIC CUT

Allows to use a grinder to cut slab tiles with the G3 guides.

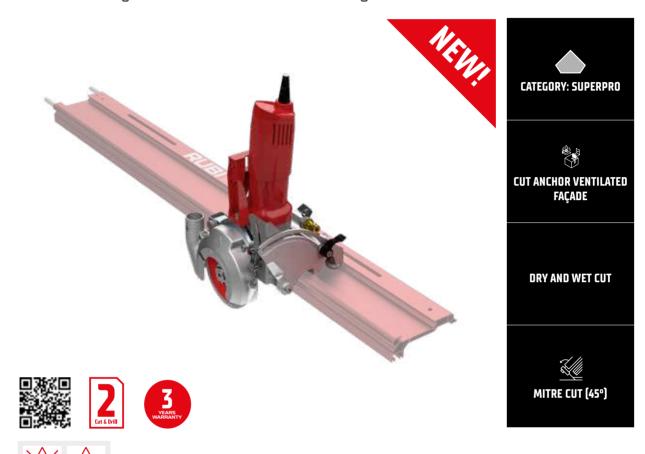

- · Angle grinder position regulation. End-users can select and adjust their preferences.
- · Multiple positions. Allows for straight cuts, mitre cuts (45°), and side cuts at 90° for slots for ventilated facade anchors. The regulation on ventilated facade allows us to adapt to different tile thicknesses.
- · Wet and dry cutting. With water connection and dust extractor adapter, it enables both dry and wet cutting.
- \cdot Guide adjustment regulation. Improves the quality of the cut.
- · Compatible with most angle grinders on the market.
- Compatible with Ø115 and 125 discs.
- · Water inlet for the hose.
- · Strap for the grinder accessory.
- Includes TVR-125 SUPERPRO diamond disc. The guide is not included.
- Maximum straight cut thickness (90°): Ø125 disc: 25 mm, Ø115 disc: 20 mm.
- Maximum mitre cut thickness (45°): Ø125 disc: 20 mm, Ø115 disc: 15 mm.

	REF.	and a	Q	1	=
ANGLE GRINDER ACCESSORY G3	16929	3/4/"	4 1/2/4 7/8"	5/8/ 20 mm"	1
ANGLE GRINDER ACCESSORY G3 USA	52959	20 / 25 mm	115 / 125 mm	15 / 20 mm	1

 $^{{}^{\}star}\text{The pictures of this product might be slightly different to its final version}$



SLAB CUTTING ACCESSORIES





CATEGORY: PREMIUM

CUTTING HEIGHT 6-20 mm

→ POWER

SLAB BREAKER PLUS

- Auxiliary breaker for the cut of slim porcelain slabs or large tiles.
- $\boldsymbol{\cdot}$ To separate thicknesses of 6 mm up to 20 mm.
- Soft-grip handle for a better comfort and ergonomic.
- With width adjustment system, to achieve an equal, uniform and symmetric distribution of breaking forces when cutting narrow strips.
- Rubber pressure pad for greater control and more precise separation.

	REF.	and the same	=	
SLAB BREAKER PLUS	18917	1/4/3/4" 6 / 20 mm	1	48



CATEGORY: PRO	CUTTING HEIGHT	ERGONOMIC

SLAB PLIERS

- For separating tiles up to 18 mm thick that have previously been scratched with a manual tile cutter.
- Specially designed for large format tiles and porcelain slabs.
- Two-in-one pliers and separator.
- *The pictures of this product might be slightly different to its final version.

	REF.	and a	=
SLAB PLIERS	28916	3/4" 18 mm	1













~~

EJ4

•





SLIM CUTTER G2 HEAD

- Tilting carriage with an ergonomic handle for the G2 cutting system.
- · Improves the fixing on the guides.

	REF.	<u>-</u>
SLIM CUTTER G2 HEAD	27911	1



CATEGORY: SUPERPRO

SLIM CUTTER G2 SUPPLEMENT GUIDES

· Aluminium guides for the G2 system.



	REF.	<u>-</u>
SLIM CUTTER G2 SUPPLEMENT GUIDE 65 CM.	52948	1
SLIM CUTTER G2 SUPPLEMENT GUIDE 155 CM.	51999	1

 π





EXTREME

22MM SCORING WHEEL PLUS EXTREME (0 7/8") TP/TQ/RCH/SLAB CUTTER

- For sharp cuttings in hard ceramic and porcelain tiles.
- \cdot Tungsten Carbide scoring wheel with a superficial Titanium treatment.
- Mounted on bearing. Enhanced smooth user perception.
- · Extra-long life.

	REF.	<u> </u>	
22MM SCORING WHEEL PLUS EXTREME (0 7/8") TP/TQ/ RCH/SLAB CUTTER	01901	5	-





• • • USE: OCCASIONAL

ACCESSORY FOR TC-125 G2 FREE CUT

- · Accessory for TC-125 G2.
- Allows TC-125 G2 do free and parallel cuts to the corner cuts. (without the need of guide).
- $\,\cdot\,^*\text{The}$ pictures of this product might be slightly different to its final version.

	REF.	\bigcirc	and a		
ACCESSORY FOR TC-125 G2 FREE CUT	52828	4 1/2/4 7/8" 115 / 125 mm	5/8/7/8" 16 / 21 mm	3/8/1/2" 9 / 13 mm	1































SLAB TRANS HEAVY DUTY N

FULLY ADJUSTABLE FRAMEWORK FOR HANDLING LARGE FORMAT CERAMIC, PORCELAIN AND NATURAL STONE SLABS.

Especially suited for handling thicker sheet tiles.











- $\cdot \ \textbf{Reinforced aluminium profile joined by a system of sliders. Greater structural strength.} \\$
- · Includes 2 perpendicular aluminium guides, for greater stiffness.
- Equipped with four retractable and removable Soft-Grip handles to adapt to every situation during installation. Six light coloured vacuum suction cups that do not leave marks on the tile. Increased load capacity.
- · Fast and easy to assemble and disassemble. Easy fix system.
- · Black anodized finish.
- Maximum load capacity: 170 kg.
- Dimensions: 3800x1700x237 mm. (assembled and deployed).
- · Maximum handling size: 360 x 160 cm.
- Unitary box with RUBI's flexography and full-colour label.











	REF.		Å	=	
SLAB TRANS HEAVY DUTY N	18982	149 5/8x66 7/8x9 3/8" 380x170x23,7 cm	80.24744 lb 36,4 kg	1	-

Additional vacuum suction cups available can be attached to the system but it does not increase the maximum load capacity of 170 kg.

ACCESSORIES



REF. 18979 Vacuum suction pad SLAB TRANS HEAVY DUTY N



REF. 21955 supplementary vacuum suction cup for guide set




REF. 18934 Slab Trolley





SLIM EASY TRANS PLUS

FOR TRANSPORTING OF LARGE-FORMAT SHEET TILES.

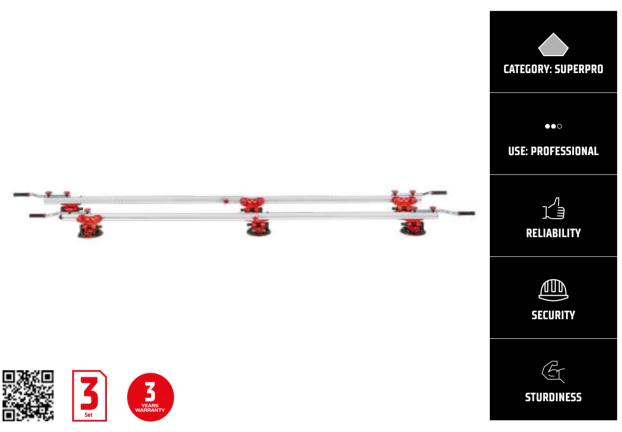









- The optimal recommended gripping distance is 700 mm (distance between handles).
- The soft-grip handles can slide and be removed through the top slot of the guides.
- · Multiple position settings for the suction cups.
- $\bullet \ \, \text{Each guide is suitable for working individually, with a maximum load capacity of 40 kg at their maximum length.}$
- · Maximum load capacity: 80 kg.
- $\boldsymbol{\cdot}$ For workpieces with a maximum length of 3.2m.

	REF.	Ċ	*			
SLIM EASY TRANS PLUS	18976	57.3196 lb 26 kg	61.7288 lb 28 kg	651 1/8x100 x89 3/4" 1654x254x228 cm	1	-

Adding more suction cups does not increase the load capacity.






ERGO TILE TRANS

BEST ADAPTABILITY FOR LIGHTER JOBS.

For the transport and handling of large formats of porcelain slabs.

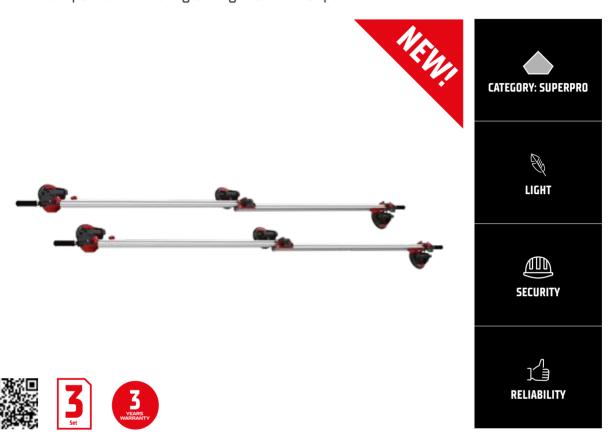

- High workpiece clamping force. Due to its 6 suction cups Ø160, which can be moved along the guide, it provides an excellent grip on the workpiece.
- Easy folding and unfolding. Smooth and easy sliding of the slides thanks to their interlocking shape and the runners between them. Easy fixing and fastening by means of locking levers (without knobs).
- Comfortable and secure holding: Thanks to the highly reinforced steel handles with anti-slip grip, which allow a better grip of the whole. The handles can be folded to allow support on the support blocks in the laying position.
- Each guide can be used separately.
- · Possibility of adjusting the tile in height, if the suction cup is slightly inclined, by means of manual levellers.
- Suction cups with safety indicator. Each suction cup, has an indicator that warns in the event of loss of suction.
- Easy release of the piece using the button on the suction cups or the tab on the suction cup rubber.
- The cups are protected to prevent damage during transport.
- · Maximum load capacity: 80 kg.
- \cdot For workpieces with a maximum length of 3.2m.

	REF.	\longleftrightarrow	Ċ			
ERGO TILE TRANS	28906	125 " 320 cm	36.3759 lb 16,5 kg	142 1/2x11 3/4x5 3/8" 362x30x13,6 cm	1	-


^{*}SUPPLEMENTARY CROSSBARS SLIM EASY TRANS/PLUS (ref. 18819). Increases the maximum load capacity to 120 kg.

 $^{^{\}star\star}\text{The pictures of this product might be slightly different to its final version.}$



SLAB TRANS MINI

FOR TRANSPORTING CERAMIC SHEETS AND LARGE-FORMAT TILES WITH A MAXIMUM RECOMMENDED SIZE OF 60X60" (150 X 150 CM).

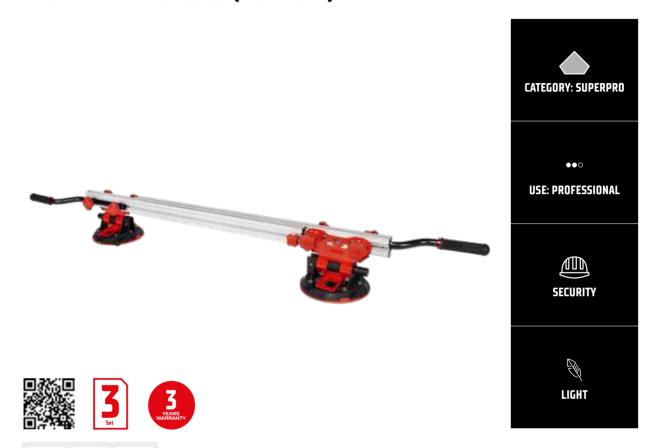

- · Ideal for medium formats. It adds less weight to the tile conveyor assembly when transporting medium-sized formats.
- Retractable aluminium guide. Allows us to handle and transport tiles 39 3/8" (100 cm) and 83" (210 cm) in size. Especially recommended for formats of up to 60x60" (150 x 150 cm), more than 5/16 " (more than 8 mm) thick, used diagonally.
- · Highly reinforced, adjustable and removable soft-grip handles. With an anti-twist and soft-grip system which ensures a better grip of the assembly.
- · 2 interchangeable Ø8" (20 cm) suction cups, can be placed at any point on the guide.
- Suction cups with a safety indicator.
- Each suction cup, of Ø8" (20 cm) in diameter and with a high-load capacity, has an indicator that warns us in the event of a loss of suction.
- The suction cups have a protector to prevent damage during transport.
- \cdot With a maximum load capacity of 88 lb (40 kg) at their maximum length.
- · Maximum load capacity: 121 lb (55 kg).

	REF.	Å	*		<u> </u>	
SLAB TRANS MINI	18983	18.29818 lb 8,3 kg	24.69152 lb 11,2 kg	90 x10 1/4x7 1/8" 231x26x18 cm	1	15





SLAB TROLLEY

TRANSPORT AND HANDLING SYSTEM FOR LARGE-FORMAT SHEET TILES.

Especially suitable for handling thicker pieces.













- Transport system and manoeuvre for large format tiles.
- $\boldsymbol{\cdot}$ Especially suitable for thicker/heavier slabs.
- Exclusive to the SLAB TRANS HD N (Ref.18982), ERGO TILE TRANS (ref: 28906) and SLIM EASY TRANS systems (Ref.18910+18819).
- Easy and quick to assemble and disassemble. Easy fix connection system.
- · Ultra light and compact.
- Extendable support arm for greater ergonomics when loading and unloading pieces on the workbench.
- Maximum load capacity: 140 kg (including material and trans system).

	REF.		*		
SLAB TROLLEY	18934	46 1/8x29 3/8x6 1/2" 117x74,5x16,5 cm	39.6828 lb 18 kg	1	5







RHINO TROLLEY

TRANSPORT AND HANDLING SYSTEM FOR LARGE TILES.

Easy to transport due to its small size.







- It has a safety lock on the wheels to prevent undesirable movements.
- It can be transported on any type of surface, thanks to its large 125 mm diameter wheels.
- Ultralight and compact.
- 40 cm wide platform. It can transport several tiles at the same time of up to 40 mm thickness.
- Maximum load capacity: 250 kg.
- Maximum transport dimensions: 3000 x 1200 mm
- · Rubber cover to protect the tiles.
- · Compatible with the transporters.

	REF.		Å	-	
RHINO TROLLEY	28912	35 3/8x17 1/8x10 " 90x43,4x27,8 cm	27.77796 lb 12,6 kg	1	-








SLAB TABLE

WORK BENCH FOR CUTTING AND HANDLING LARGE-FORMAT SHEET TILES USING THE SLAB SYSTEM RANGE OF TOOLS.

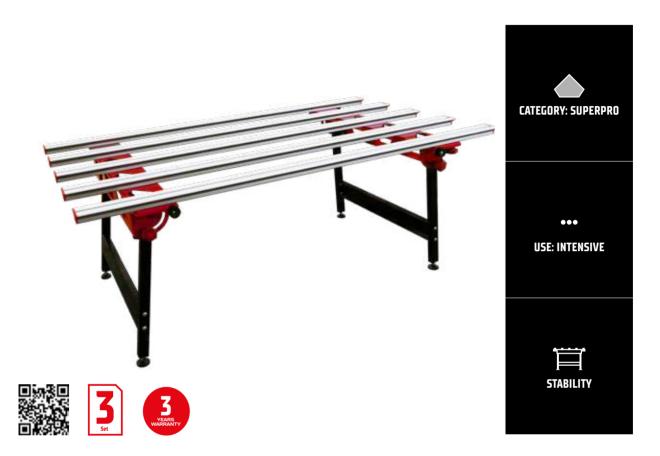

- · Workbench to support the cutting and preparation of large format materials using the tools of the Slab system range.
- Extra-reinforced bars thus increasing the rigidity of the workbench.
- The structure of the table together with the levelling feet achieves a greater stability of the set.
- · Assembly and disassembly fast and easy. Easy fix connection system (hammerhead screws).
- Folding legs. Equipped with security system against involuntary closing.
- Dimensions in working position: 1800x1044x700 mm.
- Dimensions in transport position: 1800x1044x198 mm.
- · Working height: 70 cm.
- · Maximum load capacity: 250 kg.

	REF.		Ĉ	×	=	
SLAB TABLE	18935	70 7/8x41 1/8x27 1/2" 180x104,4x70 cm	73.41318 lb 33,3 kg	79.3656 lb 36 kg	1	16





























SLAB TABLE VERSA-TILE

WORK BENCH FOR CUTTING AND HANDLING LARGE-FORMAT CERAMIC SHEETS, SPECIFICALLY DESIGNED FOR THE SLAB RANGE OF TOOLS.

Work bench for cutting and handling large-format ceramic sheets, specifically designed for the SLAB range of tools.



- Thanks to the shape of the legs and its structure, the table is very stable and sturdy even in its widest position. The adjustable feet ensure this stability, even on uneven floors.
- Dimensions in working position: The table is extendable from 1100 to 1515 mm, which allows you to handle the widest formats. Its length is 1800 mm.
- Its folding legs and two side wheels make it easy to transport and store.
- Double working height: 70 and 84 cm, which means it can be adapted to different needs, allowing all types of work to be carried out.
- · Maximum load capacity: 260 kg. Even the largest tiles can be loaded.
- Thanks to its two movable bars and wide T-shaped profiles, you can have a support surface that allows you to work as if on a workbench for the use of smaller tools, such as hand-held cutters, for example.

	REF.		Ċ		=	
SLAB TABLE VERSA-TILE	18984	70 7/8x60 1/4x33 1/8" 180x153x84 cm	90.3886 lb 41 kg	98.32516 lb 44,6 kg	1	9





TRANSPORTABLE

RETRACTABLE WORKTABLE

THE RETRACTABLE WORKBENCH PROVIDES A SUITABLE SUPPORT FOR ALL TYPES OF WORK.

The larger size is particularly suitable for cutting and handling large tiles.









- \cdot Resistant. Thanks to its structure with many support points, it allows very high loads.
- \cdot Easy to store. Once folded, it has a reduced size and is easy to store.
- \cdot Easy to transport. It has a storage bag and thanks to its two wheels it can be easily transported from one place to another.
- · Easy to assemble and disassemble. By simply pulling on the ends, we get a wide support for all our work. The addition of crossbars also provides greater stability and safety.
- · Lightweight retractable structure with high load capacity.
- · Easy to transport with wheels and carrying bag.
- · Takes up very little space when folded.
- Easy to assemble and disassemble almost instantly, no tools required.
- · Deployed dimensions.
- 300 X 120 TABLE: 75 x 300 x 120 cm.
- 120 X 120 TABLE: 75 x 120 x 120 cm.
- · Maximum load (depending on final material):
- · 300 X 120 TABLE: 1500 kg.
- 120 X 120 TABLE: 700 kg.

	REF.	<u>-</u>
RETRACTABLE WORKTABLE 120X120	28918	1
RETRACTABLE WORKTABLE 300X120	28917	1

^{*}The pictures of this product might be slightly different to its final version.



SLAB HANDLING ACCESSORIES





CATEGORY: SUPERPRO

SUPPLEMENTARY GUIDE SET ERGO TILE TRANS / SLIM EASY TRANS PLUS



- With the supplementary guide set we increase the maximum load capacity to 120kg.
- · Increases the rigidity of the unit.
- · Facilitates handling of the pieces.
- · Fast and easy to assemble and disassemble.
- · Black anodized finish.

	REF.	<u> </u>
SUPPLEMENTARY GUIDE SET ERGO TILE TRANS / SLIM EASY TRANS PLUS	18819	1





VACUUM SUCTION PAD SLAB TRANS HEAVY DUTY N

• The suction cup addition is an accessory compatible only with SLAB TRANS HEAVY DUTY N (Ref. 18982), SLIM EASY TRANS PLUS (Ref. 18976) and SLAB TRANS MINI (Ref. 18983). The suction cup can be fixed to any type of surface without leaving a mark on the part. Its use allows the suction cups to be replaced while maintaining the original maximum load capacity of the transporter at all times.

	REF.	=	
VACUUM SUCTION PAD SLAB TRANS HEAVY DUTY N	18979	1	1





SUPPLEMENTARY SUCTION CUP FOR ERGO TILE TRANS

- Diameter of the suction cup: Ø160 mm
- · Support bracket made in Steel.
- · Includes protector for the rubber of the suction cup.
- $\boldsymbol{\cdot}$ Not compatible with the rest of transporters of the SLAB SYSTEM family.
- \cdot *The pictures of this product might be slightly different to its final version.

	<u>-</u>
SUPPLEMENTARY SUCTION CUP FOR ERGO TILE TRANS 28910 6 1/4" 160 mm	1



CATEGORY: PREMIUM

SUPPLEMENTARY VACUUM SUCTION CUP FOR GUIDE SET

- Additional suction cup to place on the crossbars in the SLAB TRANS HEAVY DUTY N (Ref.18982) and SLIM EASY TRANS PLUS (Ref.18976) + CROSSBARS SET (Ref.18819).
- Provides rigidity in the transport of very thin workpieces.
- · Facilitates the transport of cut workpieces.

	REF.	=
SUPPLEMENTARY VACUUM SUCTION CUP FOR GUIDE SET	21955	1







SLAB TRANS MINI SUPPORT FOR TABLE

- · Solely for use with the SLAB TRANS MINI and the SLAB TABLE.
- Helps to place the workpiece on the SLAB TABLE & VERSA-TILE in the back buttering position without having to remove the conveyor.

	REF.	=	
SLAB TRANS MINI SUPPORT FOR TABLE	16909	1	81





SLAB TABLE LENGTHEN ACCESSORY

- Accessory for the SLAB VERSA-TILE TABLE (Ref 18984), it allows you to extend the table up to 3 m while maintaining its basic features.
- · Also compatible with the SLAB TABLE.

	REF.	=	
SLAB TABLE LENGTHEN ACCESSORY	21931	1	6





SLAB TABLE TILE LIFTING ACCESORY (C-15)

- Makes it possible to lift the workpiece 4.5 cm from the SLAB TABLE/SLAB VERSATILE TABLE profiles (only "T" profiles).
- Ideal for all types of cross-cutting and drilling on the table without the risk of damaging the profiles.

	REF.	=
SLAB TABLE TILE LIFTING ACCESORY (C-15)	21975	1













*

XX

RUBI TRILLER

COMPACT MANUAL VIBRATOR.

Especially designed for vibrating large format tiles.















- $\boldsymbol{\cdot}$ Compact manual vibrator especially designed for vibrating large format tiles.
- Expels the air trapped under the tile and maximises the adhesive coverage.(Do not use for a long period of time on the same tile to prevent the adhesive escaping.)
- · Suitable for use on floor and wall tiles.
- · Compact and light design weighing just 4.8 kg to facilitate work on walls.
- $\bullet \ \, \text{Floating carbon steel chassis with vibration reduction system for greater user comfort.}$
- · Vibration plate made of PUR plastic, non-marking and easy to change.
- \cdot Easy to change, non-marking contact plate.
- · Easy to operate tool with ergonomic double grip.
- \cdot Non-adjustable vibration frequency.

	REF.	5	RPM			=
RUBI TRILLER	18948	220-230v 50/60Hz	2940	11 1/2x9 1/2x7 1/4"	10.58208 lb	1
RUBI TRILLER USA	18978	110-130v 50/60Hz	2940	29,2x24,2x18,5 cm	4,8 kg	1




RUBI TRILLER ENERGY CAS

COMPACT MANUAL BATTERY-POWERED VIBRATOR.

Especially designed for vibrating large-format ceramic sheets.







- Suitable for use on floor and wall tiling (suitable for vertical and horizontal application, floors and walls).
- Compact and light design weighing just 5.8 kg to facilitate work on vertical surfaces.
- Floating carbon steel chassis with vibration reduction system for greater user comfort.
- · Folded 1.5 mm steel sheet chassis, powder painted in red.
- · Vibration plate made of PUR plastic, non-marking and easy to change.
- · Easy to operate tool with ergonomic double grip.
- It has a speed regulator to adapt the vibration to the material and substrate being worked on. It includes a circuit breaker safety system.
- Powered by a Li-HD 12V 4Ah battery (compatible with 12 V batteries from the Metabo CAS platform).
- Includes Rubi BMS (Battery Management System), this is a quality electronic controller that protects the battery system from any overloads and overheating. Furthermore, it optimises the performance of the battery by offering a regular energy flow and extends the autonomy of use as well as the battery life.

	REF.	5	RPM		ightharpoons	-		
RUBI TRILLER ENERGY CAS EU	10971							
RUBI TRILLER ENERGY CAS UK	10972				9 1/2x11 1/2x7 1/8"	12.78668 lb		
RUBI TRILLER ENERGY CAS USA	10973	12V 4Ah	3000	24,2x29,2x17,9 cm	5,8 kg			
RUBI TRILLER ENERGY CAS	10913					1		
BATTERY CAS LIHD 12V 4AH	85904							
BATTERY CAS LIPOWER 12V 2AH	85903	12V 2Ah						

QUAKE ENERGY CAS

LIGHT AND COMPACT VIBRATOR

For tiles or porcelain sheets.













COMPATIBILITY

RUBIMIX E-9 ENERGY CAS

RUBIMIX E-10 ENERGY CAS

ANGLE GRINDER TECH

RUBI LUMEO

QUAKE ENERGY CAS

RUBI TRILLER ENERGY CAS

18 V 5.2 Ah 18 V 2.0 Ah 12 V 4.0 Ah





- Designed to prevent the generation of encapsulated air bubbles between the adhesive and the back of the ceramic tile, thus facilitating ideal adhesion between the adhesive and the tile.
- The low weight and wireless system make it easy to use on vertical supports and work at height.
- The double handle with bi-material handle offers greater ergonomics and comfort to the user, and its geometry facilitates better control and stability of the tool during vibrating.
- The contact base with the ceramic tile does not leave marks and is easily replaceable.
- The front handle improves ergonomics and gives the user a better experience.
- Powered by CAS Li-Power 18V 2Ah battery, compatible with Metabo brand battery tools and with all those that are part of the CAS 18V platform.
- · It has a progressive on-off switch (rpm control).
- · LED battery-charge indicator.
- New CAS platform LI-POWER 18V-2 Ah battery.

	REF.	5	RPM	\bigcirc	Ö	*	=					
QUAKE ENERGY CAS EU	60934			5 1/8"	3.3069 lb 3.1 kg	4.4092 lb 4.05 kg						
QUAKE ENERGY CAS UK	60942		10000 M				2					
QUAKE ENERGY CAS USA	60938	18V 2Ah	18V 2Ah	10000 Max	127 mm			2				
QUAKE ENERGY CAS WITHOUT BATTERY	60953									60953		7.0040142 lb 2.69 kg
BATTERY CAS LIPOWER 18V 2AH	85901						1					



OCTO-USB ENERGY

SAFE & EASY TO USE

Suction cup to lift ceramic tiles with smooth or slightly textured and clean surfaces.









- Battery suction cup designed for handling ceramic tiles.
- 3.7V / 2 Ah. battery integrated in the suction cup and charging via USB-C cable. (cable included, charger not included).
- Water and dust proof buttons. IP30.
- Digital display with 4 indicators: Vacuum / Release / ON / Charge + MBAR pressure info screen.
- Max load capacity: 140 kg only for flat & smooth surfaces and horizontal handling.
- · Plastic case for transport and protection.

	REF.	5	\bigcirc	$\stackrel{\circ}{\Box}$		=
OCTO-USB ENERGY	66967	3.7V / 2Ah	8 5/8" 220 mm	2.667566 lb 1,21 kg	3.3069 lb 1,5 kg	10







INSTALLATION







MULTIANGLE

ANGLE TILE REGULATOR

- The angle tile gap regulator is designed for corner adjustment during the installation, especially for large formats which are more difficult to manipulate.
- It allows 90°, 180° and 270° alignment and tile gap adjustment at the same time. Very useful for countertops installation.
- · Comfortable and accurate adjustment.
- Easy deactivation of the suction cups by means of the tab at the base of the suction cups.
- · Metal gearing for longer life
- · Recommended to use in pair.
- *The pictures of this product might be slightly different to its final version.

	REF.	\bigcirc	=
ANGLE TILE REGULATOR	03995	5 7/8" 150 mm	1





TILE GAP CLOSER

- For a precise and easy adjustment of the gap between tiles during floor or wall tiling
- Large diameter suction cups (150 mm) for any kind of tile surface (flat, rough, structured, etc.)
- For lateral displacement of tiles and gap reduction between 0 40 mm.
- Enables to equal the level of the tiles between 0 20 mm.
- · Maximum lifting capacity up to 100 Kg (220 lbs).

	REF.	\bigcirc		Ĉ	★	-
TILE GAP CLOSER	60926	5 7/8" 150 mm	18 7/8X5 7/8X4 3/4" 48X15X12 cm	7.958606 lb 3,61 kg	8.465664 lb 3,84 kg	1





VACUUM



SC-200 SUCTION CUP WITH VACUUM PUMP

- · Suction cup for handling large and heavy tiles.
- · Special for textured surfaces.
- Adapts to any surface finish.
- Suction applied by manual vacuum pump.
- · Load loss indicator (red mark).
- · Pressure-release mechanism.
- · Maximum load capacity: 243 lb (110 kg).

	REF.	\bigcirc	*	=	
SC-200 VACUUM PUMP CUP	18919	7 7/8" 200 mm	3.3069 lb 1,6 kg	8	90







VACUUM



NO MARKS

GSC-200 VACUUM SUCTION CUP

- Suction cup for the manipulation of large ceramic tiles and heavy porcelain slabs.
- · Adapts to the surface without leaving any marks.
- · Fixing by vacuum manual pump.
- · Load loss indicator (red mark).
- Pressure release mechanism.
- · Maximum load capacity: 110 kg.
- · High resistance plastic body.
- · Transport suitcase.

	REF.	Q	*		
GSC-200 GREY VACUUM SUCTION	21951	7 7/8" 200 mm	3.3069 lb 1.5 kg	8	90





ERGONOMIC

ERGO TILE BEATER

- · For a good settlement of tiles.
- It facilitates the extraction of the air that remains between the tile and the adhesive.
- With a bi-material handle for maximum comfort and ergonomics.
- Metal plate for complete rigidity and long durability, reinforced with rubber to avoid damaging the ceramic tiles.

	REF.	Ö	=
ERGO TILE BEATER 1,4 KG	28900	3.08644 lb	
ERGO TILE BEATER 1,4 NO	20700	1,4 kg	7
FREE THE REATER 7.3 VC	20071	7.05472 lb]
ERGO TILE BEATER 3,2 KG	28931	3,2 kg	





CATEGORY: SUPERPRO

TILE BEATING BLOCK

- · For a good settlement of tiles.
- · Waterproof and high wear resistance wood.
- Perfect flatness.
- Dimensions: 15 3/4" x 5 3/4" (40x14,5 cm.)
- Ref. 72980 with white natural rubber sheet to prevent damage to the tile.

	REF.	=
TILE BEATING BLOCK 40 X 14,5 CM. WITH RUBBER	72980	1



ELECTRIC TILE CUTTING

Electric cutters
Circular saw and vacuum cleaner





SELECTION TABLE

		M.	AX	Q	3)	<u>@</u>]
	'					with plunge effect
	DX-N	148	58 7/16"		12-14"	0
••• Intensive	DR	84	33"	300-350	12-14	o o
••• Int	DS-N	152	59 13/16"			-
	DCX-XPERT	155	61"			
	DC-SMART ADVANCE	121	48"	250	250 10"	
	DC-PYTHON	121	48"			0
	DT	90	59 1/2"			
•• o Professional	DWD	125	49 3/16"	125	5"	
	DL	124	48 13/16"	125	5"	
	DV	106	41 3/4"			
• · · Occasional	DU-EVO	85	33"	200	8"	-
000000	ND	c	0			



				W		⟨ - ⟩		□		Ø				
		DX-350 N 1000	3 CV/ HP	2,2 KW	cm 46 5/8"	(*4) 83,5 X 83,5 cm 32 7/8 X 32 7/8"	00	mm 2 9/16"	105 / 220 mm 4 1/8" / 8 11/16"	300 - 350 mm 12 - 14"	92 Kg. 203 Lb.	0	0	
		DX-350 N 1300	3 CV/ HP	2,2 KW	(*4) 148,5 cm 58 7/16"	(*4) 105 X 105 cm 41 5/16 X 41 5/16"	∞	mm 2 9/16"	105 / 220 mm 4 1/8" / 8 11/16"	300 - 350 mm 12 - 14"	100 Kg. 220 Lb.	0	0	
WI		DS-250 N 1000	3 CV/ HP	2,2 KW	102 cm 40 3/16"	72 X 72 cm 28 3/8 X 28 3/8"	00	(*3) ₂₅ mm 1"	51 mm 2 1/16"	250 mm 10"	91,5 Kg. 201.7 Lb.		0	
PREMIUM	••• Intensive	DS-250 N 1300	3 CV/ HP	2,2 KW	132 cm 51 15/16"	93,5 X 93,5 cm 36 13/16 X 36 13/16"	00	(*3) ₂₅ mm 1"	51 mm 2 1/16"	250 mm 10"	96,5 Kg. 212.7 Lb.		0	
	••• Int	DS-250 N 1500	3 CV/ HP	2,2 KW	152 cm 59 13/16"	107,5 X 107,5 cm 42 5/16 X 42 5/16"	00	(*3) ₂₅ mm 1"	51 mm 2 1/16"	250 mm 10"	100 Kg. 220 Lb.		0	
		DCX-250 XPERT 1250	2 CV/ HP	1,5 KW	125 cm 49 3/16"	90 X 90 cm 35 7/16 X 35 7/16"	00	50 mm 1 15/16"	61 / 90 mm 2 3/8" / 3 9/16"	250 mm 10"	83 Kg. 183 Lb.	0	0	0
		DCX-250 XPERT 1550	2 CV/ HP	1,5 KW	155 cm 61"	110 X 110 cm 43 5/16 X 43 5/16"	00	50 mm 1 15/16"	61 / 90 mm 2 3/8" / 3 9/16"	250 mm 10"	-	0	0	0
		DR-350	3 CV/ HP	2,2 KW	(*4) ₈₄ cm 33"	(*4) 43,5X43,5 cm 17 X 17"	00	(*5) ₇₁ mm ₂ 13/16"	95 / 150 mm 3 3/4" / 5 7/8"	300 - 350 mm 12 - 14"	63 Kg. 139 Lb.	0	0	
		DC-SMART ADVANCE 1200	1,5 CV/ HP	1,1 KW	(*2) ₁₂₁ cm 47 5/8"	(*2) 85 X 85 cm 33 7/16 X 33 7/16"	00	55 mm 2 3/16"	61 / 90 mm 2 3/8" / 3 9/16"	250 mm 10"		0	0	
		DC-250 PYTHON 850	1,5 CV/ HP	1,1 KW	(*2) 98 cm 38 9/16"		00	50 mm 1 15/16"	61 / 90 mm 2 3/8" / 3 9/16"	250 mm 10"	54,5 Kg. 120 Lb.	0	0	
SUPERPRO	nal	DC-250 PYTHON 1200	1,5 CV/ HP	1,1 KW	(*2) 120,5 cm 48"	(*2) 85 X 85 cm 33 7/16 X 33 7/16"	00	50 mm 1 15/16"	61 / 90 mm 2 3/8" / 3 9/16"	250 mm 10"	59,5 Kg. 131 Lb.	0	0	
ans ⇔	•• o Professional	DT-250 MAX	2,4 CV/ HP	1,8 KW	90 cm 36"	60 X 60 cm 24 X 24"	00	25 mm 1"	90 mm 3 9/16"	250 mm 10"	45 kg. 99 Lb.	0	0	0
	•	DWD-125 DUO CUT 1250	1,5 CV/ HP	1,1 KW	90 cm 36"	88 X 88 cm 34 5/8 X 34 5/8"	00		30 mm 11 13/16"	125 mm 4 ¹5//₀"	40 kg. 88 Lb.	0	0	0
		DL-125 1200	2,3 CV/ HP	1,8 KW	125 cm 49 3/16"	90x90 cm 35 7/16" X 35 7/16"	00	20 mm 13/16"	20 mm 13/16"	125 mm 4 ½%"	50 Kg. 110.23 Lb.	0	0	0
		DV-200 1000	1,5 CV/ HP	1,1 KW	106 cm 41 3/4"	76,5 X 76,5 cm 30 1/8 X 30 1/8"	∞	(*3) ₁₅ mm 9/16"	35 mm 1 3/8"	200 mm 8"	57,5 Kg. 126.8 Lb.		0	
		DU-200 EVO 650	1,1 CV/ HP	0,8 KW	65 cm 26"	45 X 45 cm 18 X 18"	∞	20 mm 13/16"	35 mm 1 3/8"	200 mm 8"	22,5 Kg. 49.6 Lb.		0	0
PRO		DU-200 EVO 850	1,1 CV/ HP	0,8 KW	85 cm 33"	60 X 60 cm 24 X 24"	00	20 mm 13/16"	35 mm 1 3/8"	200 mm 8"	27,2 Kg. 60 Lb.		0	0
\Diamond		ND-200	1,1 CV/ HP	0,8 KW	∞	∞	(*1) ₂₃ cm 9"	24 mm 15/16"	40 mm 1 9/16"	200 mm 8"	17,2 Kg. 37.9 Lb.			
		ND-180	0,7 CV/ HP	0,55 KW	∞	∞	20 cm 8"	22 mm 7/8"	35 mm 1 3/8"	180 mm 7"	13,6 Kg. 29 Lb.			

(*1) With lateral stop. 2) 13/32" (10mm) thick material and plunge effect.

(*3) With special decks for mitring. 4) With Ø12" (300mm) blade, 13/32" (10mm) thick material and plunge effect. 5) With Ø14" (350mm) blade.



DX-350 N

MOBILE HEAD MACHINE WITH PLUNGE EFFECT FOR TOTAL VERSATILITY.

For all types of ceramic and porcelain tiles, building materials such as marble, granite, facade and fireproof bricks.

































- · Motor assembly mounted on sliding bearings for maximum precision and reliability. Perfect finishes.
- · Folding legs with integrated castors: Pyramidal orientation to improve the stability and safety of the machine.
- · Aluminium structure. Lighter cutter with maximum resistance to working conditions.
- · High performance plunge effect. Maximum cutting height.
- · Equipped with protective safety system for segmented blades.
- · With thermal security switch.
- · Water pump cooling of blade with flow control valve.
- Diamond blade Ø 14" (350 mm) not included.
- · Allows the use of a Ø 12" (300 mm) blade.
- · Adjustable mobile head with plunge effect capability.
- · Motor on top and belt transmission.
- · With lateral stop for repetitive cuts.
- · Aluminium working surface removable for easy cleaning.
- · Removable water tank system.
- · 2mW line laser.
- · Circular level for easy field installation.
- · Machine supplied without cable.
- · Supplied with ZERO DUST system already assembled. Also provided with a second anti-splash standard protector









		ı
1.	2	-3-4-5
	Cut & Drill	

	REF.	5	RPM	\longleftrightarrow			illilli	, dillin	x2	<u></u>	\bigcirc		Å	<u>_1</u>		
DX-350-N	52905	230V-50 Hz.	2800	40 3/8" 102.5	46 5/8" 118,5	32 7/8x32 7/8"	8"					66 7/8x33 7/8x56 1/4"	202.8232 lb			
1000	52906	220V-60 Hz.	3400	102,3 CM	CM	83,5x83,5 cm	∞ cm					170x86x143 cm	92 kg			
	52915	230V-50 Hz.	2800					2.1/21	/ 1/0/0 F/0II	11/0	44.7// 47.7//					
	52916	230V-60 Hz.	3400	53.4/01	50.4/21	44.7/0.44		2 1/2" 65 mm	4 1/8/8 5/8" 105 / 220 mm	1 1/8" 25,4 mm	11 3/4-13 3/4" 300-350 mm	78 3/4x33		1	1	**1
DX-350 N 1300	52918	120V-60 Hz.Inch.	3400	52 1/8" 132,5 cm	58 1/2" 148,5 cm	41 3/8x41 3/8" 105x105 cm						7/8x56 1/4" 200x86x143	220.46 lb 100 kg			
	52927	230V-50 Hz. 2,4HP	2830	Cili	Cili	103/103 (111						cm				
	52928	110V-50 Hz.	2700													

Cutting capabilities may vary depending on the head position, special plates and disc diameter. Ref. 52927 and 52928: 2,4 CV/HP.

ACCESSORIES



REF. 51916 Tile Fixer DV/DC/DCX/ DS/DX



REF. 51915 Set of flanges Ø184mm DX-350







DS-250 N

MOBILE HEAD MACHINE FOR HIGH ACCURACY.

For wall tiles, floor tiles, porcelain tiles, marble, granite and other materials.


































- · Motor assembly mounted on sliding bearings for maximum precision and reliability. Perfect finishes.
- · Folding legs with integrated castors: Pyramidal orientation to improve the stability and safety of the machine.
- · Wheels and handle included. Easy transport.
- · Aluminium structure. Lighter cutter with maximum resistance to working conditions.
- · Removable aluminium tables for easy cleaning of the machine.
- · With thermic security switch.
- Water pump cooling of blade with flow control valve.
- · Diamond blade Ø10" (250mm) not included.
- With a double set of flanges, one especially designed for mitre cuts.
- · Motor assembly mounted on sliding bearings for mitre cuts.
- · Safety protector for segmented blades.
- \cdot With lateral stop for repetitive cuts.
- · Removable water tank system.
- · 2mW line laser.
- · Spirit level for easy field installation.
- · Machine supplied without cable.
- Supplied with ZERO DUST system already assembled. Also provided with a second anti-splash standard protector





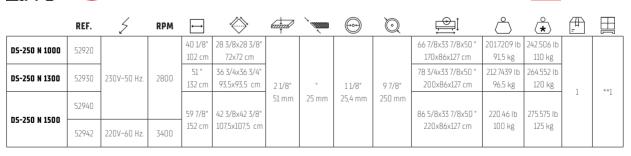

Cutting capabilities may vary depending on the head position, special plates and disc diameter. Ref. 52945 [3F]: 4 CV/HP.

ACCESSORIES



REF. 51916 Tile Fixer DV/DC/DCX/ DS/DX



REF. 51914 Roller Table Extension DU/DC/DCX/ DS/DX (from 2013)










DCX-250 XPERT

PROFESSIONAL MOVING HEAD MACHINE FOR WET CUTTING WITH PLUNGE EFFECT.

For occasional cutting of natural stone such as marble or granite.



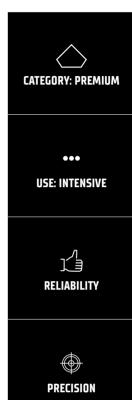

























- · Reinforced aluminium chassis with innovative triple beam system and steel sides. Improves the stability and rigidity of the chassis.
- · Reinforced cutting guide for a better cut finish.
- · C3-PYTHON System increases cooling efficiency and reduces water dispersion.
- · High performance plunge effect. Cutting height adjustment.
- Includes transport handle and off-road type reinforced wheels, which provide better transportability and handling of the machine.
- Steel double settling system for improved efficiency and water recovery.
- Angular measurement with aluminium square adjustable from 0° to 60° for repetitive cuts.
- · Includes reinforced folding legs with folding-prevention system and quick lock.
- External and easy to remove water tank with 30 L capacity.
- Includes improved splash guard system with auto-sliding protective cover.
- Patented ZERO DUST system exclusive to RUBI certified by the TNO, for safe exposure thanks to the reduction of the breathable dust particles generated during the cut.
- Ergonomic bi-material handle for comfortable operation of the cutting head.
- · Earth integrated into the chassis.
- · Does not include power cable.
- · Not Supplied with a blade.











	REF.	5	RPM	\leftarrow			x2	, dililin	<u></u>	Q	Å				<u>*</u>
	52960	230V-50Hz.	2750												
DCX-250 XPERT 1250	52961	110V-50Hz.	2/30	49 1/4"	52 3/8"	35 3/8x35 3/8"					171.9588 Ib	75 5/8x29 1/8x51 1/8"			
DCA-250 APERI 1250	52929	220V-60Hz.	7750	125 cm	133 cm	90x90 cm					78 kg	17 o 192x74x130 cm			
	52962	120V-60Hz.	3350				2 3/8/3 1/2"	1"	11/8"	9 7/8"			1	**1	
	52970	230V-50Hz.	2750				60 / 90 mm	50 mm	25,4 mm	250 mm			1	1	
DCV 250 VD507 1550	52971	110V-50Hz.	2/50	61 1/8"	64 1/8"	43 1/4x43 1/4"						87 3/8x29 1/8x51 1/8"			273.3704 lb
DCX-250 XPERT 1550	52937	220V-60Hz.	3350	155 cm	163 cm	174 110x110 cm					lb 86 kg	222x74x130 cm			124 kg
	52972	120V-60Hz.	חברר												

The cutting capacities can vary depending on the head position, special flanges and disc diameter.

ACCESSORIES




REF. 51927 Set of flanges 0170mm DC PYTHON/DCX



REF. 57941 Table Extension DV/DC/ DCX/DS/DX



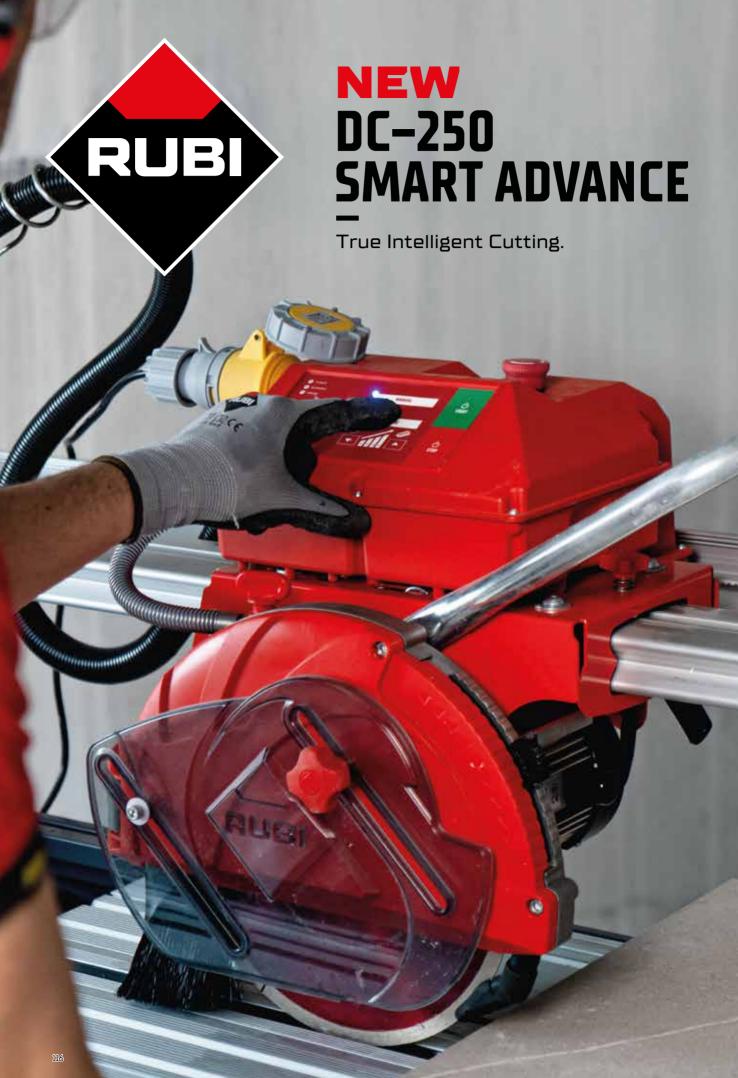

THE TILE CUTTER THAT ADAPTS, PERFORMS AND PROTECTS.

Imagine a day in the life of a professional. Hours spent ensuring that every cut is precise, every edge smooth and every part perfectly adjusted. The job is demanding. Manual control is unpredictable, inconsistent and requires constant adjustments to suit materials and blade conditions. The **DC-250 SMART ADVANCE**, a tool designed to redefine how you cut. It's not just a cutter: it's your partner in precision.

When preparing tiles, the installer selects one of **four levels to choose between speed and finish**. With the intelligent automatic control, the machine instantly analyses the needs of the disc, type and thickness of the material. Unlike manual settings based on guesswork, the DC-250 SMART ADVANCE ensures that every cut is perfectly even, as if guided by an expert hand.





DC-250 SMART ADVANCE

UNIQUE TILE SAW THAT AUTOMATICALLY ADAPTS ITS PERFORMANCE TO THE NEEDED JOB. THE REAL SMART CUT.

For cutting all kind of ceramic tiles, Porcelain tiles and other materials.



























- · Two operating modes: Manual and Automatic. Different modes of Automatic cutting some favouring speed while other the quality of finish.
- · Electronic Control to adapt engine power to the job needed. Uniform Cut with Perfect finish and no chipping.
- The machine adapts to the Blades needs and adjusts accordingly. Gives the Blades longer life and avoids glazing.
- · Integrated protection system in the electronic control that stops and protects the engine in case the blade glazes or gets stuck.
- Motor (1,1 kW) assembly mounted on sliding bearings for maximum precision and reliability.
- · Direct drive motor.
- Protection Bar for the driving belt.
- · Foldable at 45° for mitre.
- · Plunge effect allowing cutting height adjustment.
- Steel plate structure. Sturdy and maximum resistance to working conditions.
- · Patented system ZERO DUST for a safe exposure to breathable dust particles generated during the cut.
- New cooling system. This allows to increase the cooling's EFFICIENCY and to reduce water dispersion. Includes blade and square alignment system with a regulation screw.
- · Foldable legs with wheels for an EASIER transportation and removable tables for easy CLEANING of the machine.
- Adjustable aluminium square (0° 60°) with lateral stop for REPETITIVE cuts at 0° and 45°.
- · Safety blade PROTECTOR for TURBO and SEGMENTED blades that meets EU standard.
- 50W water pump with flow control.
- · Supplied without cable (except US version).





	REF.	5	RPM	\longleftrightarrow	4		x2	, dillin	(\bigcirc		Ö		<u> </u>	
	53913	230V-50Hz	2700												
DC 370 CHART ADVANCE 4300	53910	110V-50Hz	2790	42 1/2"	47 5/8"	33 1/2x33	2 1/4/3 1/2"	2 1/8"	-	9 7/8"	39 3/8x18	/F1 ·	70.1		
DC-250 SMART ADVANCE 1200	53912	220V-60Hz	7/7/	108 cm	121 cm	1/2" 85x85 cm	58 / 88 mm	55 mm		250 mm	7/8x33 1/2" 100x48x85 cm	65 kg	79 kg	1	-
	53911	120V-60Hz	3436						1						

^{*}The cutting capacities can vary depending on the head position, special flanges and disc diameter.

**The pictures of this product might be slightly different to its final version.

ACCESSORIES



REF. 57941 Table Extension DV/DC/ DCX/DS/DX



REF. 51914 Roller Table Extension DU/DC/DCX/ DS/DX (from 2013)





DC-250 PYTHON

MOVING HEAD MACHINE, VERSATILITY AND PRECISION

For cutting porcelain stoneware.































- · Motor assembly mounted on sliding bearings for maximum precision and reliability. Foldable at 45° for mitre. Direct drive motor.
- · Steel plate structure. Sturdy and maximum resistance to working conditions.
- · Patented ZERO DUST system exclusive to RUBI and certified by TNO, for safe exposure because of reduction of respirable dust particles generated during cutting.
- · C3 Python cooling system. New adjustable cooling system. Allows to adjust the point of water's fall depending on the material's thickness, getting a direct impact of the water in the cutting point. This allows to increase the cooling's efficiency and to reduce water dispersion.
- Foldable legs with wheels for an easier transportation and removable tables for easy cleaning of the machine.
- · Adjustable aluminium square (0° 60°) with lateral stop for repetitive cuts at 0° and 45°.
- · Safety protector for turbo and segmented blades.
- · Blade cooling by water (50W water pump) with flow control.
- \cdot Includes diamond blade CEV-SUPERPRO Ø250 (*Ref. 56949 includes CPA- SUPERPRO Ø250 blade).
- · Supplied without cable.







DC-250 PYTHON 850

DC-250 PYTHON 1200

56937

56938

56939

56943

56947

56949

220V-60Hz

110V-50Hz

230V-50Hz.

220V-60Hz.

110V-50Hz.

230V-50Hz.



33 5/8"

85,5 cm

42 1/2"

108 cm

121 cm

3436

2790

3436

2790



The cutting capacities can vary depending on the head position, special flanges and disc diameter.

ACCESSORIES



REF. 57941 Table Extension DV/DC/ DCX/DS/DX



85X85 cm

REF. 51914 Roller Table Extension DU/DC/DCX/ DS/DX (from 2013)

 $\sqrt{}$



162x82x131 cm

Cables with plug

lb

75 kg

59,55 kg















DWD-125 DUO CUT

HYBRID BRIDGE TILE SAW TO PERFORM WET AND DRY CUTS.

For professional cutting all kind of ceramic tiles, Porcelain tiles and occasional cut of natural stone such marble or granite.



























- · Double cutting mode. Dry Cutting: blade cover connected to dust extractor. Wet cutting: double spray blade cooling system.
- · Fixed square. Assembled with magnets. With lateral side stop for repetitive and diagonal cuts. Detachable and easy storage inside the same chassis.
- · Light and compact. Central beam (mono chassis type). Folded chassis width 50cm Easy to transport and move through narrow spaces.
- · Greater stability thanks to the pyramidal design of the legs. Individual adjustment on each leg to adapt to work area. Equipped with fast block system.
- Rotating side table. Easy to mount and adjust, no tools needed. Telescopic and folding lateral leg for a perfect levelling to the floor. Possibility to mount in both sides of the machine.
- · Motor assembly mounted on sliding bearings for maximum precision and reliability.
- Brushless motor. Power equivalence to Universal motor of 1,8 kW. Direct drive motor.
- · Foldable arms at 45° for mitre.
- · Plunge effect allowing cutting height adjustment.
- · Made in aluminium and plastic to make it lighter and high rusting resistance.
- $\boldsymbol{\cdot} \text{ Patented zero dust system for a safe exposure to breathable dust particles generated during the cut.} \\$
- C3 Hidra cooling system. Allows to increase the cooling's efficiency and to reduce water dispersion.
- Rubber strips on top of the table to gain tiles fixation and stability.
- Supplementary table adjustable at 0-45-90-135-180°. Allows to have an extra width of support from 350 (0°/180°) to 900mm (90°)
- Equipped with plastic handle, rubber wheels (Ø100 mm) and bumpers for an EASIER transportation.
- Safety blade Protector for Turbo and Segmented blades that meets EU standard.
- · Supplied without cable and without blade.











	REF.	5	RPM	\longleftrightarrow				, dimm		Q		Å		
	59906	220/240V-50/60hz							7/8"					
DWD-125 DUO CUT 1250	59907	110/130V-50/60hz	6000	49 1/4" 125 cm	-	34 5/8x34 5/8" 88x88 cm	11 3/4" 30 cm	-	22,2 mm	4 7/8" 125 mm	75 5/8x30 3/4x46 1/2" 192x78x118 cm	88.184 lb 40 kg	1	1**
	59911	110-130V 50-60HZ				00000 EIII			5/8"		1/2//0/110 EIII			

^{*}Real power of the Brushless motor is 900W, but this is equivalent to a 1600W Universal motor.
**The pictures of this product might be slightly different to its final version.





REF. 05973 Cleaning Block



REF. 05974 N-Cleaning Block











DL-125

MOBILE HEAD CUTTER, POWERFUL, LIGHT AND TRANSPORTABLE.

Suitable for intensive cutting of porcelain and all kinds of ceramic tiles. Occasional cut of natural stone.



























- · 35 cm wide extruded aluminium chassis, ideal for small workplaces.
- \cdot Wheels and handle for easy transport, as well as height-adjustable legs for stability.
- · Equipped with blade adjustment system.
- · Multiple accessories included with the machine.
- · Electric machine with cutting effect.
- · Motor set mounted on bearings for maximum precision and reliability.
- 1800W (2,4CV) universal motor.
- 125mm diamond blade TVR included (cutter compatible with 115-130mm blades).
- · Reinforced aluminium chassis (double beam system). Improves the stability and rigidity of the chassis.
- · Safety protection system for Blades.
- Equipped with ZERO DUST system.
- Removable water tank for easy cleaning (8L).
- · Ergonomic transport and adjustment improvements (motor adjustment, support adjustment, carriage wheel adjustment).
- Accessories included: Double lateral extension, repetitive cuts, laser and lateral stop for repetitive cuts included (adjustable from 8mm to 20mm tiles).
- · The machine is supplied without cable.











	REF.	5	RPM	\longleftrightarrow			x2	, dillin	(\bigcirc		Å	<u>-</u>	
DL-125 120	56924	220-240V 50/60Hz.	12.000 max	48 7/8" 124 cm	53 1/8" 135 cm	35 3/8x35 3/8" 90x90 cm	1 1/8/1 " 30 / 50 mm	3/4" 20 mm	V	7/8" 22,2 mm	4 7/8" 115-130 mm	69 5/8x18 1/2x51 5/8" 177x47x131 cm	105.82 lb 43 kg	1	**1

The cutting capacities can vary depending on the head position, special flanges and disc diameter.

ACCESSORIES



REF. 05973 Cleaning Block



REF. 05974 N-Cleaning Block









DV-200

MOBILE HEAD ELECTRIC CUTTER OF MAXIMUM FUNCTIONALITY AND RELIABILITY

For all types of ceramic and porcelain tiles and other materials.

























- · Set motor on sliding bearings for maximum accuracy and cut quality.
- · C³ System, improves blade's cleaning and cooling for a higher performance.
- \cdot Removable aluminium tables for easy cleaning of the machine.
- · Folding legs with built-in wheels for a more comfortable transport.
- · Includes diamond disc CEV PRO Ø 200 mm.
- Direct motor, single phase 1.1 kW (1.5 HP) with thermal protector.
- · Water pump cooling of blade with flow control
- · Reinforced chassis, greater structural rigidity.
- Adjustable lateral stop (0 ° to 60 °) for repetitive cuts.
- · Large work area (100x48,5cm) suitable for large formats.
- Working height of 84.5 cm. for improved user ergonomics.
- · Double Switch (ON/OFF) quick and easy access.
- Foldable head at 45° for mitre cuts that can cut up to 106 cm length.
- · Front blade cooling diffuser with 5 positions depending on the hardness or the abrasion of the material.
- · Machine supplied without cable.











		REF.	5		RPM	\longleftrightarrow		, dillin	\odot	\bigcirc		Å		
		54911	230V-50 Hz.											
DV-200 1	000	54913	110V-50Hz.	30 1/8x30 1/8" 76,5x76,5 cm	2790	41 3/4" 106 cm	1 3/8" 35 mm	5/8" 15 mm	√	7 7/8" 200 mm	62 x23 1/4x46 1/8" 160x59x117 cm	133.3783 lb 60,5 kg	1	**1
		54914	120V-60Hz.											

The cutting capacities may vary depending on the position of the head, special flanges and disc diameter.

ACCESSORIES



REF. 54999 Laser & Level Kit DV/DC/ DCX/DS/DX



REF. 51916 Tile Fixer DV/DC/DCX/ DS/DX



REF. 57941 Table Extension DV/DC/ DCX/DS/DX








DU-200 EVO

MOBILE HEAD CUTTER FOR RENOVATIONS AND LIGHT WORKS.

To cut ceramic and porcelain wall and floor tiles.



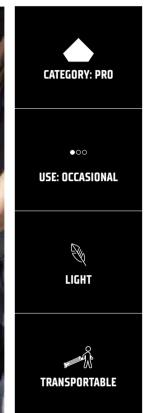
























- · Built-in foldable legs. Very easy to fix.
- · With wheels and handle for a more comfortable transport and handling.
- · External water tank, easy to handle and clean.
- · C³ System, improves blade's cleaning and cooling for a higher performance.
- Motor assembly mounted on sliding bearings and foldable for mitre cuts.
- With lateral stop for repetitive cuts and adjustable square from 0 to 45°.
- Direct drive motor with thermal protector and reinforced chassis.
- · Corrugated tube to protect power cable and water pipe.
- Front blade cooling diffuser with 5 positions depending on the hardness or the abrasion of the material.
- · Bi-material handle, better ergonomics.
- With CEV-SUPERPRO diamond disc Ø 200 mm.





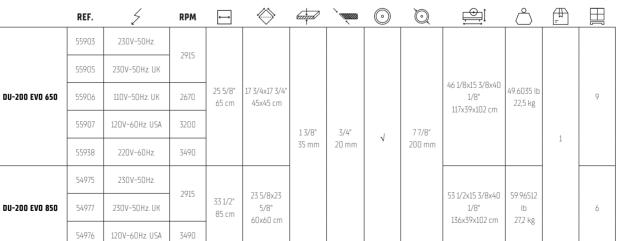

The displayed product may not correspond exactly with the actual model.

REF. 05973
Cleaning Block
REF. 05974
N-Cleaning Block





Discover the DT-250 MAX, the ideal intensive wet cut for ceramic, porcelain, stone, and landscaping materials. This electric cutter is the perfect solution for professionals looking for **fast and precise outdoor cutting**, with mitre and plunge capabilities, and a large support table that allows you to work with tiles up to 125x125 cm.

Its advanced water management, with a tank of up to 19 L, includes the ZERO DUST system, an innovation that ensures a **safe working environment free of dust and water particles**.

A compact and powerful electric tile cutter, ideal for making the perfect cut wherever you need it.





DT-250 MAX

TRANSPORTABLE ELECTRIC CUTTER WITH MITRE EFFECT. GOOD FINISH.

For cutting stoneware, tiles, ceramics, refractories and other materials.





FAST

















- · Python cooling system combined with the Zero Dust system, keeps your work area clean by reducing the production of splashes.
- · It incorporates a tubular steel support with wheels and foldable, to transport the machine easily.
- · With lateral stop for repetitive cuts with adjustment from 0° to 45° and magnetic support for the blade key.
- · Diamond blade for fast, smooth cuts with a long service life.
- · Laser indicator to facilitate ceramic placement and obtain more precise cuts.
- Tilting cutting head adjusts for precise 22.5° and 45° bevel cuts.
- Tank with level indication min. and max. Maximum capacity: 19 l.
- It incorporates an aluminium table with a rubber surface with a cutting capacity of 90 cm.
- $\boldsymbol{\cdot}$ Available accessory Ref. 58916 that extends the table up to 120 cm.





	REF.	5	RPM	\longleftrightarrow		aning)	, dillilli		O		Ĉ		
	58909	220/240 V 50/40 U-											
DT-250 MAX	58915	220/240 V - 50/60 Hz	4000	35 3/8" 90 cm	23 5/8" 60 cm	3 1/2" 90 mm	" 25 mm	1 1/8" 25,4 mm	9 7/8" 250 mm	62 x368 1/8x48 3/8" 160x935x123 cm	99.207 lb 45 kg	1	4
	58913	110/130 V - 50/60 Hz											

The cutting capacities can vary depending on the head position, special flanges and disc diameter.

ACCESSORIES



REF. 58916 EXTENDABLE TABLE DT – 250 MAX



REF. 58917 Set of flanges for DT-250 MAX







DR-350

ELECTRIC SAW WITH PLUNGE EFFECT.

For all types of building materials like: masonry bricks, facade bricks, fireproof bricks, marble, granite and ceramic tiles.

































- · Head with high performance plunge effect. Large cutting capacity.
- · Equipped with ZERO DUST system. Tested and certified by TNO.
- · Large table for a larger work surface and comfort.
- · Steel structure robustness. Increased resistance to the demands of intensive work.
- Equipped with protective safety system for segmented blades.
- · With thermal protector.
- · Adjustable head to 45°.
- · Large table 23 1/16"x19 1/2" (58.5x49.5cm).
- Blade cooling by water pump with integrated regulation valve.
- · Diamond blade Ø12-14" (300-350mm) not included.
- · Machine supplied without cable.
- · Direct drive motor.
- Supplied with new ZERO DUST system already assembled. Also provided with a second anti-splash standard protector.







	REF.	5	RPM	\longleftrightarrow				x2	\odot	\bigcirc		Å	*	<u>_1</u>		
DR-350	56940	230V-50	2800	28 1/8"	33 1/8"	17 1/8×17 1/8"	oo"	3 3/4/5 7/8"	_	11 3/4-13 3/4"	45 1/4x27 1/8x52 1/8"	138.89 lb	175.27 lb	V	1	1
DK 330	30740	Hz.	2000	71,5 cm	84 cm	43,5x43,5 cm	∞ cm	95 / 150 mm		300-350 mm	115x69x132,5 cm	63 kg	79,5 kg	,	1	1

The cutting capacities may vary depending on the position of the head, special flanges and disc diameter.





REF. 05974 N-Cleaning Block



REF. 05973 Cleaning Block









ND-200

PORTABLE CUTTER, IDEAL FOR FINISHINGS AND RENOVATIONS.

For cutting ceramic tiles and other materials.





























- \cdot Lightweight and compact, ideal for working in small spaces.
- · Stainless steel folding table. More durability.
- \cdot Fast positioning system at 45°. Easy to use.
- \cdot Removable disk protector for vertical cuts. Simplifies creation of light boxes, frames, etc...
- CEV-PRO Ø8" (200mm) diamond blade included.
- · Water cooling of the blade.
- · Lateral stop to allow repetitive cuts.
- Electric cable: 4.9ft (1,5m).
- Direct drive with thermal protector.

	REF.	5	RPM	\longleftrightarrow		TILLE T		\odot	Q		$ centcolor{c}$		
	45910	230V-50 Hz.	2790										
ND-200	45915	230V-50 Hz.UK	2/90	∞"	∞"	9 1/8"	15/8"		7 7/8"	20 1/8x20 5/8x9	37.91912 lb	1	8
ND-200	45911	220V-60 Hz.	3240	∞ cm	∞ cm	23 cm	40 mm	V	200 mm	1/2" 51x52,5x24 cm	17,2 kg	1	0
	45916	110V-50 Hz.UK	2750										

The cutting capacities may vary depending on the position of the head, special flanges and disc diameter.





ND-180 SMART

PORTABLE ELECTRIC CUTTER.

Ideal for Wall and Floor tiles. Perfect for repairs and renovations.



- \cdot Water cooling of the blade.
- \cdot With foldable table for mitre cutting up to 7 7/8" (20cm).
- · With lateral stop for repetitive cuts.
- · Guide for 45° cuts.
- DIRECT drive SINGLE PHASE motor.
- · WET cut.
- LIGHT for a comfortable work.
- EASY to use.
- 1.5 m electric cable.
- $\boldsymbol{\cdot}$ FOLDABLE table for mitring cuts.
- · INCLUDES:
- $\boldsymbol{\cdot}$ Ø180 mm. diamond blade, CEV-PRO type.
- Lateral stop for repetitive cuts and 45°.

	REF.		5	RPM	\longleftrightarrow		TILLED TO	Suited .	O		Å		
	24976		230V-50 Hz.	2800							19.40048		
ND-180 SMART	24979	√	230V/50Hz.	2000	oc	oc	3/4" 20 mm	1 3/8" 34 mm	7 1/8" 180 mm	15 1/8x15 1/2x6 3/4" 38,5x39,5x17 cm	1b 8.8 kg	1	24
	24977		120V/60Hz.	3600							21.23 lb 9.63 kg		

The breaking capacities may vary depending on the position of the head, special flanges and disc diameter.





ACCESSORIES FOR ELECTRIC CUTTERS



 \sqrt{m}

 σ





CLEANING BLOCK

· For cleaning of diamond blades.

	REF.	<u> </u>
CLEANING BLOCK	05973	5





• Specifically designed to bring back the diamonds on the rim of diamond blades when cutting porcelain.

	REF.	-
N-CLEANING BLOCK	05974	5



SET OF FLANGES FOR MITRING CUTS.

- · To reduce saw flex in mitre cuts.
- · Available in several models.
- · Flange for reinforced saws.



	REF.	=
SET OF FLANGES 0184MM DX-350	51915	
SET OF FLANGES 0170MM DC PYTHON/DCX	51927	1
SET OF FLANGES 0130MM DV/DC/DCX/DX-250	57991	1
SET OF FLANGES FOR DT-250 MAX	58917	

CATEGORY: Superpro

TABLE EXTENSION

- Increases work surface for large format tiles. 23 5/8"(600x280mm).
- · Maximum weight: 33Lb, (15kg).
- · Compatible with various models of cutting machines.

-	V
1-27	

	REF.	<u></u>
TABLE EXTENSION DV/DC/DCX/DS/DX	57941	1





TILE FIXER DV/DC/DCX/DS/DX

- Allows the fixing of the tile during cutting, thus avoiding sudden movements.
- · Accessory adaptable to DV,DC,DS and DX series (up to 2009).

	REF.	
TILE FIXER DV/DC/DCX/DS/DX	51916	1
		,





ROLLER TABLE EXTENSION

- $\boldsymbol{\cdot}$ With rollers to simplify movement of the tiles.
- · With adjustable foldable legs.
- Work surface 26 9/16"x22 5/8" (675x575mm) and maximum weight 154lb (70kg).
- · Installation on both sides of the machine.

	REF.	<u>-</u> "
ROLLER TABLE EXTENSION DU/DC/DCX/DS/DX (FROM	E101/ ₄	1
2013]	J1714	1







DT-250 MAX TABLE EXTENSION

- For better grip of large tiles with a cutting capacity of up to 120 cm.
- Exclusive for DT -250 MAX.
- Extendable legs included to prevent tipping of the support.
- Main table manufactured in aluminium with a rubber layer.
- Guides manufactured in extruded aluminium with reinforcing cross-bars.

	REF.	=
EXTENDABLE TABLE DT - 250 MAX	58916	1



ADJUSTABLE LENGTH LATERAL STOP DC/DCX/DS/DX

- · For fixing large format tiles.
- · Adjustable to the maximum length of electric cutter.
- Tile is held laterally thus avoiding any movement.
- Especially suitable for blocking and execution of repetitive mitre.

	REF.	=
ADJUSTABLE LENGTH LATERAL STOP DC/DCX/DS/DX	54844	1





LATERAL STOP FOR DC/DCX/DS/DX

• Facilitates positioning of the tile, while reducing the percentage of errors.

	REF.	=
LATERAL STOP FOR DC/DCX/DS/DX	54822	1







LASER & LEVEL KIT DV/DC/DCX/DS/DX

- · Kit includes:
- Circular bubble level to facilitate proper positioning of the electric cutter.
- Laser Tracer indicating the passage of the disc and facilitates placement of material.
- Laser power: 2 mW
- · Laser Class: 2
- · Not compatible with DC-250 PYTHON models.

	REF.	=
LASER & LEVEL KIT DV/DC/DCX/DS/DX	54999	1





CABLES WITH PLUG

- For machines supplied without cable, please include both the reference of the machine and the reference of the correct voltage cable with plug which is suitable for the Country of destination.
- · Approximate length 3.5m.

	REF.	5	=
CABLE WITH PLUG 230/50 EUR	58850	230V - 50 Hz.EUR	
CABLE WITH PLUG 110/50 UK	58852	110v-50 Hz.UK	
CABLE WITH PLUG 230/50 UK	58853	230V-50 Hz.UK	
CABLE WITH PLUG 120/60 15A 12AWG USA	58854	120V-60 Hz.15 A 12AWG USA	1
CABLE WITH PLUG 220/60 15A 12AWG USA	58856	220V-60 Hz.15 A 12AWG USA	
CABLE WITH PLUG 230/50 10A AUS	58863	230v - 50 Hz. 10A AUSTR.	
CABLE WITH PLUG 120/60 30A 10AWG USA	58869	120V-60 Hz. 30A 10AWG	




CIRCULAR SAW TC-180

PRECISE CUTTING ON LARGE FORMAT MATERIALS.

For dry and wet cutting of ceramic, porcelain and other materials.



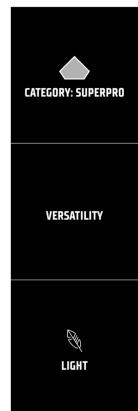















- · Practical cutter and easy to use for large pieces.
- · Double cooling system, wet and dry. Greater adaptability to environment.
- \cdot Guiding mark for better visibility of the line of cut.
- · Easy adjustment of cutting thickness. Greater versatility and adaptability to the different materials.
- Especially suitable for large pieces.
- · Allows the user to reduce manipulation, handling heavy or awkward use.
- · Content:
- · Blade Ø180mm TCR-180 SUPERPRO.
- · Parallel guide.
- · Cable with PRCD switch (differential).
- · Cone reducer for vacuum cleaner.
- · Transport case.

	REF.		RPM	W	5		\bigcirc	<u></u>		\odot	Å	ô		
TC-180	50939	√	5800	1800 1800 W	230V / 50-60Hz	2 1/8" 55 mm	7 1/8" 180 mm	7/8" 22.2 mm	12 x17 3/4x14 " 33x45x38 cm	V	14.77 lb 6.7 kg	24.2506 lb 11 kg	1	-









CIRCULAR SAW TC-180 KIT

- · Kit includes:
- 1 x Circular Cutter TC-180 230V 50/60Hz (Ref. 50939), 1 x Blade TCR-180 (Ref. 31975), 2 x Guide 80 cm. for TC-180 (Ref. 50956), 1 x Connector guides (Ref. 50957), 2 x Fixing Clamps (Ref. 50958).

	REF.	-	
TC-180 230V/50-60HZ KIT	50994	1	8



TC-180 GUIDES

- · Aluminium Guide for straight cuts.
- · Ability to connect multiple guides through the connector (Ref. 50957).

		REF.		Ċ	
	80CM GUIDE FOR TC-180 (31 1/2")	50956	32 1/4x7 1/4x3/4"	2.777796 lb	
	80CM GOIDE FOR 1C-180 (31 1/2)	30730	82x18,5x2 cm	1,26 kg	,
	120CM GUIDE FOR TC-180 (47 1/4")	50959	47 5/8x7 1/8x3/4"	3.96828 lb	1
	120CM GUIDE FOR 1C-160 (4/ 1/4)	20727	121x18x2 cm	1,8 kg	



CATEGORY:

GUIDE CONNECTOR

· Allows the connection of multiple guides to increase cutting length.

	REF.	<u>-</u> "
GUIDE CONNECTOR	50957	1



CATEGORY:



FIXING C-CLAMP

- Highly recommended for fixing the guide on the tile and preventing movement through out the cut, thus achieving a cleaner cut.

	REF.	(<u>-</u>
FIXING C-CLAMP	50958	1



ANGLE GRINDER TECH

EFFICIENT AND VERSATILE.

Battery powered angle grinder for dry cutting, drilling or grinding of ceramic and porcelain tiles, natural stone or other materials.





- \cdot BRUSLESS MOTOR. Highest efficiency and maximum handiness.
- · CAS PLATFORM TECHNOLOGY. Li-Power 18V 5,2 Ah CAS battery. Portability and manageability, free of cables.
- · TOOL-FREE ADJUSTABLE GUARD. Twist-proof.
- · SLIM DESIGN for low-fatigue working. Handle circumference 183 mm.
- Electronic safety shutdown reduces kickback if the disc stops unexpectedly for high user safety.
- · Overload protection protects the motor from overheating.
- Electronic soft start for smooth start-up.
- · Restart protection prevents unintentional start-up after battery pack change.

	REF.	5	RPM	\bigcirc	(···)		
RUBI ANGLE TECH ENERGY CAS EU (W/O BATTERY+CHARGER)	52949	18 18 V	10000	4 7/8" 125 mm	7/8" 22 mm	4.85012 lb 2,2 kg	-
BATTERY CASE LI-POWER 18V 5.2AH	85902	18V					1

 $^{^{\}star}$ The pictures of this product might be slightly different to its final version.



CHARGER ENERGY CAS







CHARGER ENERGY CAS

- To charge all LiPOWER and LiHD sliding connection batteries (12 V–18 V). with adapted battery charging current.
- · 3-year warranty.
- · Approximate charging time: 30 minutes for 1.5 Ah.
- "AIR COOLED" function.
- For charging all Li-Power Compact, Li-Power Plus, Li-Power Extreme batteries.

	REF.	<u>_</u>	5
CHARGER ENERGY CAS EU	26575	- 1	
CHARGER ENERGY CAS UK	26576		12-18
CHARGER ENERGY CAS USA	26577		12-18 V
CHARGER ENERGY CAS AUS	26578		

ACCESSORIES DIAMOND BLADES







••• USE: PROFESSIONAL

CUT MASTER GUIDE

- To increase the stability and comfort when cutting. Improves the quality of the cut and the performance of the blade.
- The connection to vacuum cleaner completely removes dust from the cutting zone. Silicone seal does not allow dust leaks.
- Fits all models of an angle grinder Ø115, Ø125 mm. It is not needed to remove original blade protector.
- Wheels holds the weight of the angle grinder when cutting. It is much easier to guide the blade in a straight line.
- · Vacuum cleaner connector Ø35 mm.
- Rubber wheels of Ø30 mm that not marks the tile.

	REF.	=
CUT MASTER GUIDE 90°	40922	1




PRO-EDGER BEVELLING AND MITRING ACCESSORY

PROFESSIONAL PORTABLE SYSTEM FOR INTENSIVE USE, ESPECIALLY DESIGNED FOR DRY BEVELLING AND MITRING PRINCIPALLY OF LARGE FORMAT TILES.

It can bevel and mitre porcelain, ceramic and any natural stone material of any length.



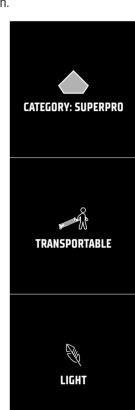





- \cdot It makes mitre cuts at 45° up to a maximum thickness of 20 mm, and with no thickness limitation for bevelling.
- · Progressive bevelling and mitring at different depths to prolong the useful life of the grinding wheel and make bevelling easier for the user.
- · Compatible with 115 & 125mm angle grinders with cable or battery that are easily and safely fitted thanks to the joint made with an M14 threaded shaft and quick-fastening belt.
- · Sealed high-speed bearings, to prevent the ingress of dust generated during the bevelling or mitring.
- · Highly wear-resistant white polyethylene slides.
- A vacuum cleaner can be easily fitted for dust extraction (ZERO-DUST).
- · Quick and simple grinding wheel change.
- · Chassis with carbon steel sheet.
- 45° x 20 mm grinding wheel included (ref. 16946).
- $\cdot \text{ Fixing to angle grinder by means of a \varnothing14mm (Ref. 16956) and 5/8"-11" (Ref. 16901) and quick fastening belt.}$
- $\boldsymbol{\cdot}$ Progressive wear bevelling and mitring is adjustable by 10 mm.
- · A damp cloth is recommended for cleaning.
- Water is not necessary for use.
- · Includes a bag with pockets for tools as a gift.











	REF.			, dillin			Å	*		
PRO-EDGER PORTABLE BEVELLING	16956	-1	8"	3/4"	M14" M14 mm	14 x8 1/4x6 3/4"	9.03886 lb	9.9207 lb	1	3/
PRO-EDGER PORTABLE BEVELLING USA	16901	٧	∞ cm	20 mm	5/8" 16 mm	38x21x17 cm	4,1 kg	4,5 kg	1	24

ACCESSORIES



Fine Grit PRO-EDGER bevelling Wheel



Fine Grit PRO-EDGER mitring Wheel



Turbo Twist Coarse Grit PRO-EDGER mitring Wheel







ACCESSORIES FOR BEVELLING AND MITRING







CATEGORY: SUPERPRO

MATERIAL: PORCELAIN TILE

GOOD FINISH

FINE GRIT PRO-EDGER BEVELLING WHEEL

- · Grinding wheel for bevelling.
- · Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS.
- Recommended use between 9,000 12,000 rpm to achieve greater durability of the wheel
- Round finish available on 5 and 10 mm radius.
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-EDGER.

	REF.	\bigcirc		<u> </u>	RPM	—
R.5 FINE GRAIN PRO-EDGER BEVELLING	14057	2 5/8"		1/4"		
WHEEL	16957	66 mm	M16"	6 mm	12000 max.	
R.10 FINE GRAIN PRO-EDGER BEVELLING	1/050	2 "	M16 mm	3/8"	12000 IIIdX.	1
WHEEL	16958	76 mm		11 mm		1





CATEGORY: SUPERPRO

MATERIAL: PORCELAIN TILE

GOOD FINISH



FINE GRIT PRO-EDGER MITRING WHEEL

- · Grinding wheel for mitring.
- Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS.
- Recommended use between 9,000 12,000 rpm to achieve greater durability of the wheel.
- 45° type tool with 1–2 mm edge.
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-EDGER.

	REF.	\odot	\bigcirc	 :	RPM	= 1
45X20 FINE GRAIN PRO-EDGER MITRING	16946	3 3/4"		3/4"		
WHEEL	10740	94 mm	M16"	20 mm	12000 max.	г
45X15 FINE GRAIN PRO-EDGER MITRING	16985	3 1/4"	M16 mm	5/8"	12000 IIIdx.	
WHEEL	1070J	84 mm		15 mm		





CATEGORY: SUPERPRO

MATERIAL: PORCELAIN TILE

FAST





- · Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS.
- Recommended use between 9,000 12,000 rpm to achieve greater durability of the wheel.
- The TURBO TWIST model can be used for grinding before finishing with a fine grit, as its grooved design can chip the tile profile.
- · Internal diameter: 16.1 mm (M16 thread).
- For exclusive use with PRO-EDGER.

	REF.	\bigcirc			RPM	-
45X15 TURBO TWIST COARSE GRAIN PRO-EDGER	1/00/	3 1/4"	M16"	5/8"	17000	г
MITRING WHEEL	16984	84 mm	M16 mm	15 mm	12000 max.	5





MITRE-MATE

HIGH QUALITY MITRE CUT.

Accessory for mini angle grinders (0115/0125) to make mitre cuts on the edge of tiles.











- · Sliding it along the edge of the tile, thanks to the horizontal sliding surface and the bearings that allow a smooth advance during cutting.
- · By sliding the tile. The machine can be clamped in an inverted position on the SLAB* tables. The machine is held in place and the tile can be slid into position. Particularly suitable for repetitive cutting.
- · PERFECT FINISHING, thanks to the precise cut adjustment function, the large support surface and the bearings that allow perfect sliding.
- · Suction connection compatible with most vacuum cleaners.
- Easy and quick to transport and install, no guides required.
- Types of anchor for grinder: M14 or 5/8"-11
- Specially designed for dry cutting. Allows wet cutting for angle grinders with IP65.
- Dust extractor connector with various diameters (Ø37/42/49 mm).
- · Safety band for fixing the grinder.
- Compatible with most angle grinders (Ø115/125) on the market.
- · Includes TVR-125 SUPERPRO diamond blade.

	REF.			Q	=
MITRE-MATE	52825	3/4/"		4 1/2/4 7/8"	1
MITRE-MATE USA	52826 20 / 25 mm	V	4 1/2/4 7/8" 115 / 125 mm	1	

^{*}Compatible with the SLAB TABLE (both versions) and exclusively with the SLAB TABLE VERSATILE.

 $[\]ensuremath{^{**}}$ The pictures of this product might be slightly different to its final version.

RUBI CLEAR DUST EXTRACTOR M

WET AND DRY VACUUMING WITH THE SAME MACHINE AND SPECIFIC ACCESSORIES FOR OPTIMISATION.

For dry and wet extraction work in areas where very fine dust is generated by cutting, such as hardwood, paint, plastics, cement and brick (type M dust).













- · Autoclean system that automatically shakes the filter.
- M- Class certified, it vacuums up 99.9% of airborne particles, including wood (hard and soft), plaster, plasterboard, Corian, paint, plastics, cement and brick.
- · Power socket for automatic start and stop in synchronisation with the tool being used (2000 W max).
- Metal wheels reinforced with rubber and with an optimum radius for moving on uneven ground.
- · Agile and compact. 20L tank and an extra-long handle.
- · Included:
- Blue anti-foam filter for vacuuming liquids.
- · 3-metre suction hose.
- · Extendable plastic tube.
- · two multifunctional brush bases.
- · Brush for hard floors.
- · Brush for working with liquids.
- Flat nozzle for corners.
- · Rubber adapter.
- · Consumables included:
- · Three 20L bags.
- · M- Class polyester cartridge filter.

	REF.	5		ightharpoons	=	
RUBI CLEAR DUST EXTRACTOR M	51941	230V-50Hz.	157 1/2x157 1/2x236 1/4" 400x400x600 cm	22.046 lb	12	
RUBI CLEAR DUST EXTRACTOR M UK	53500	230V-50Hz.		10 kg		-

ACCESSORIES



REF. 51997 RUBI CLEAR DUST EXTRACTOR BAG (5 UN)



REF. 51989 RUBI CLEAR DUST EXTRACTOR FILTER



REF. 52947 CLEAR VACUUM CLEANER WET FILTER



 σ





RUBI CLEAR DUST EXTRACTOR BAG (5 UN)

- Filter bag for M-Class dust extraction.
- Designed specifically for the Clear vacuum cleaner.
- Closure designed for proper waste management and subsequent sealing (regulated in the cleaner's M-Class certification).
- Pack of 5 units.
- · IFA certification.

	REF.	=
RUBI CLEAR DUST EXTRACTOR BAG (5 UN)	51997	15





RUBI CLEAR DUST EXTRACTOR FILTER

- Filter for dry vacuuming and M- Class filtration.
- Specifically designed for the Clear vacuum cleaner.
- IFA certification.

	REF.	<u> </u>
RUBI CLEAR DUST EXTRACTOR FILTER	51989	1

CATEGORY:



CLEAR VACUUM CLEANER WET FILTER

- · Filter for wet vacuuming.
- Specifically created for the Clear vacuum cleaner.
- Created to protect the motor.

	REF.	=
CLEAR VACUUM CLEANER WET FILTER	52947	1





AS-30 PRO VACUUM CLEANER

VACUUM ADAPTABLE TO ELECTRIC MACHINES

To vacuum wet or dry.













- · For wet and dry vacuuming.
- Power: 1400 W.
- Airflow: 58 I / s.
- Vacuum: 180 mbar. (18 psi.)
- · Capacity: 30 l.
- Double switch: On / Off and automatic start.
- · Socket for electric tool (max.2000W)
- · Electrical cable: 4 m.
- · Accessories included:
- Hose, nozzle (35/37 mm) and crevice tool.
- · Steel pipes.
- · Wet brush.
- · Filter damp sponge for wet.
- HEPA filter for dry.

	REF.	5		=	
AS-30 PRO VACUUM CLEANER	50962	210-240V/50-60 Hz	25 1/4x14 x14 " 64x38x38 cm	1	9





REF. 50964 AS-30 PRO Vacuum Cleaner Paper Bag.



REF. 50998 AS–30 PRO Vacuum Cleaner Dry Filter



REF. 50999 AS-30 PRO Vacuum Cleaner Wet Filter.



 π





AS-30 PRO VACUUM CLEANER PAPER BAG.

- · Paper bag for dust vacuuming.
- · Compatible with AS-30 PRO.
- · Biodegradable.
- 4 units set.

	REF.	=
AS-30 PRO VACUUM CLEANER PAPER BAG.	50964	1





AS-30 PRO VACUUM CLEANER DRY FILTER

- HEPA filter for dry vacuuming.
- · Compatible with AS-30 PRO.
- Minimum particle size: 5 µm.

	REF.	=
AS-30 PRO VACUUM CLEANER DRY FILTER	50998	1





AS-30 PRO VACUUM CLEANER WET FILTER.

- Filter for wet vacuuming.
- Compatible with AS-30 PRO.
- · 2 units set.

	REF.	-
AS-30 PRO VACUUM CLEANER WET FILTER.	50999	1





DIAMOND BLADES

Dry cutting diamond blades Wet cutting diamond blades





DIAMOND BLADES - DRY CUT

· DIAMOND BLADES WITHOUT NEED OF WATER FOR COOLING.









GENERAL PURPOSE SEGMENTED DIAMOND BLADE (STT)

- Recommended blade for cutting all types of building materials, including reinforced concrete. High performance and speed of cutting.
- For cutting materials > 25 mm thickness.

	REF.	Q		·		RPM	-
STT 115 SUPERPRO	30974	4 1/2" 115 mm	7/8"	1/8"	3/8"	13300 max.	5
STT 230 SUPERPRO	30976	9 1/8" 230 mm	22,2 mm	2,2 mm	10 mm	6650 max.	1



CATEGORY: PRO	UNIVERSAL	GENERAL CONSTRUCTION	HEAVY DUTY	FAST

GENERAL PURPOSE SEGMENTED DIAMOND BLADE (SEV)

- Recommended for cutting building materials such as brick, concrete, terrazzo.
- The fastest. Maximum speed and best blade's cooling. To cut materials with more than 1" (25 mm) thickness.
- · Perforated steel blade to improve cooling and diminish cut's tensions.

	REF.	\bigcirc	(···)	\odot		RPM	=
SEV 115 PRO	25915	4 1/2" 115 mm		1/8"		13300 max.	_
SEV 125 PRO	32940	4 7/8" 125 mm	7/8" 22,2 mm	1,6 mm	3/8" 8 mm	12250 max.	5
SEV 230 PRO	25916	9 1/8" 230 mm		1/8" 2,3 mm		6650 max.	1



CATEGORY: SUPERPRO	CATEGORY: PRO	UNIVERSAL CERAMIC	GOOD FINISH

CERAMIC TILES CONTINUOUS RIM DIAMOND BLADE (CSV)

- · Blade for general cut of ceramic tiles as wall tile, floor tiles, porcelain.
- \cdot The best finish. To cut ceramic tiles and other stone coating materials with less than 3/4" (20 mm) thickness.

	REF.	Q		\odot		RPM	
CSV 115 PRO	25910	4 1/2" 115 mm				13300 max.	
CSV 125 PRO	31915	4 7/8"	7/8" 22,2 mm	1/8" 1,6 mm	3/8" 8 mm	12250 max.	5
CSV 125 SUPERPRO	30883	125 mm				12230 IIIax.	







UNIVERSAL

GENERAL CONSTRUCTION

VERSATILE

GENERAL PURPOSE TURBO DIAMOND BLADE (TSV)

- Recommended for cutting building materials such as bricks, concrete, terrazzo.
- A great combination. High performance and cutting speed with high standard finishes.

	REF.	\bigcirc		·		RPM	-
TSV 115 PRO	25917	4 1/2" 115 mm	7/8"	1/8" 2 mm	3/8"	13300 max.	5
TSV 230 PRO	25918	9 1/8" 230 mm	22,2 mm	1/8" 2,5 mm	8 mm	6650 max.	1





HARD Materiai



XTRA LONG

HARD MATERIALS TURBO VIPER DIAMOND BLADE MITRE & STRAIGHT (TGS)

- Diamond blade for straight and 45° (mitring) cuts on dry.
- · For use with porcelain materials and natural stone.
- A great combination. High performance and cutting speed with high-quality finishes
- · Suitable for use with a grinder.
- It is not recommended to use the TGS blade on circular saws (e.g. TC-125).

	REF.	\bigcirc	⊕	\bigcirc		RPM	-
TGS 115 SUPERPRO	40917	4 1/2" 115 mm	7/8"	1/8"	п	13300 max.	F
TGS 125 SUPERPRO	40918	4 7/8" 125 mm	22,2 mm	1,6 mm	25 mm	12250 max.	3



CATEGORY: SUPERPRO

HARD MATERIAL

HEAVY DUTY

FAST

HARD MATERIALS TURBO DIAMOND BLADE VIPER (TVR)

- Recommended blades to cut hard materials such as granite, slate, quartzite, rustic tiles, clinker and porcelain tile.
- Robust blade, ready to support high tensions in the extremes of the blade.
- For cutting materials > 3/4" (20 mm) thickness.
- · High cutting speed.
- · Reinforced blade.
- · Is suitable for mitre cuts.

	REF.	Q		·		RPM	=
TVR 115 SUPERPRO	30986	4 1/2" 115 mm	7/8"	1/8"	3/8"	13300 max.	F
TVR 125 SUPERPRO	30987	4 7/8" 125 mm	22,2 mm	1,4 mm	10 mm	12250 max.	٦



HARD MATERIAL

LONG LIFE

FAST

HARD MATERIALS SEGMENTED DIAMOND BLADE "CANTERO" (SCA)

- Recommended for cutting high hardness natural stones such as granite, basalt, quartzite, concrete drive, etc.
- $\boldsymbol{\cdot}$ Long life and high performance. Bar of 12 mm.
- · High speed cutting.
- · For cutting materials > 25 mm thickness.

	REF.	\bigcirc		•		RPM	=
SCA 230 SUPERPRO	30904	9 1/8" 230 mm	7/8" 22,2 mm	1/8" 3 mm	1/2" 12 mm	6650 max.	1





CATEGORY: SUPERPRO HARD MATERIAL	FAST	GOOD FINISH
----------------------------------	------	-------------

HARD MATERIALS TURBO VIPER DIAMOND BLADE (TVA)

- Recommended blade for cutting hard materials such as granite, rustic tiles, clinker, refractory, slate, quartzite and porcelain tile.
- The specific design of the diamond band offers greater speed of cutting harder materials without sacrificing finish quality.
- · Only for straight cuts, not suitable for mitring.

	REF.	Q	()	(RPM	<u>-</u>
TVA 115 SUPERPRO	31932	4 1/2" 115 mm		1/8"		13300 max.	5
TVA 125 SUPERPRO	31933	4 7/8" 125 mm	7/8"	1,4 mm	3/8"	12250 max.]]
TVA 180 SUPERPRO	31934	7 1/8" 180 mm	22,2 mm	1/8"	10 mm	8500 max.	3
TVA 230 SUPERPRO	31935	9 1/8" 230 mm		1,6 mm		6650 max.	1



CATEGORY: SUPERPRO	HARD MATERIAL	FAST	GOOD FINISH

HARD MATERIALS TURBO MINI VIPER DIAMOND BLADE (TVA)

- Blade recommended for cutting hard materials such as granite, slate, porcelain stoneware, natural stone and sintered stone, etc.
- · Especially for outlet holes.
- $\boldsymbol{\cdot}$ Long life. Due to the metal alloy of the diamond particle coating, it is resistant to high temperatures which prevents burning of the blade.
- · It leaves a very good finish on the tile.
- · Only for straight cuts, not suitable for mitre cuts.

	REF.	Q	<u></u>	•		RPM	
TVA 85 SUPERPRO	32951	3 3/8" 85 mm	7/8" 22,2 mm	1/8" 1,5 mm	3/8" 10 mm	19000 max.	5



CATEGORY: PRO	PORCELANIC	QUALITY FINISH	FAST

PORCELAIN TILES SLITHER PRO

- · Recommended for cutting porcelain material, but it can also cut other materials, such as natural stone, granite or marble.

- Not suitable for mitre cutting.

	REF.	Q	<u></u>	(RPM	
SLITHER 115 PRO	32953	4 1/2" 115 mm	7/8"	1/8"	1/4"	13300 max.	F
SLITHER 125 PRO	32954	4 7/8" 125 mm	22,2 mm	1,25 mm	6 mm	12250 max.	ב





CATEGORY: SUPERPRO PORCELANIC EXCELLENT QUALITY FINISH FAST

PORCELAIN TILES SLITHER SUPERPRO

- Recommended for cutting porcelain material, but it can also cut other materials, such as natural stone, granite or marble.
- Especially for VERY fine cuts with EXCELLENT quality.
- · J-Slot type fast disk.
- · Not suitable for mitre cutting.

	REF.	Q		\bigcirc		RPM	=
SLITHER 115 SUPERPRO	32960	4 1/2" 115 mm	7/8"	1/8"	3/8"	13300 max.	_
SLITHER 125 SUPERPRO	32961	4 7/8" 125 mm	22,2 mm	1,1 mm	8 mm	12250 max.	5



CATEGORY: SUPERPRO PORCELANIC GOOD FINISH

PORCELAIN TILES CONTINUOUS RIM DIAMOND BLADE (CPR)

- \cdot Recommended blade to cut fine porcelain tiles with less than 3/4" (20 mm) thickness.
- · The best finish.

	REF.	O		\odot		RPM	=
CPR 115 SUPERPRO	30972	4 1/2" 115 mm	7/8"	1/8"	3/8"	13300 max.	F
CPR 125 SUPERPRO	30973	4 7/8" 125 mm	22,2 mm	1,7 mm	8 mm	12250 max.	٦



CATEGORY: SUPERPRO	PORCELANIC	FAST

PORCELAIN TILES TURBO DIAMOND BLADE (TCR)

- · Recommended blade to cut fine porcelain tiles.
- High performance and fast cutting speed with high quality finishes.

	REF.	O		\odot		RPM	
TCR 115 SUPERPRO	31972	4 1/2" 115 mm		1/8"		13300 max.	5
TCR 125 SUPERPRO	31973	4 7/8" 125 mm	7/8"	1,4 mm	3/8"	12250 max.	
TCR 180 SUPERPRO	31975	7 1/8" 180 mm	22,2 mm	1/8" 1,6 mm	8 mm	8500 max.	3
TCR 230 SUPERPRO	31978	9 1/8" 230 mm		1/8" 2 mm		6650 max.	1





- Specially designed for landscaping materials.
- Ideal for dry cutting porcelain, ceramic, natural stone and sintered stone materials of > 20 mm with a grinder.
- A great combination. High performance and cutting speed with high-quality finishes.
- Not suitable for dry cutting with the TC-125 or circular saw.

	REF.	Q	◎	\odot		RPM	
TLG 115 EXT SUPERPRO	41900	4 1/2" 115 mm	7/8"	1/8"	3/8"	13300 max.	-
TLG 125 EXT SUPERPRO	41901	4 7/8" 125 mm	22,2 mm	1,4 mm	10 mm	12250 max.]]

(o)







PORCELAIN TILES J-SLOT DIAMOND BLADE (CPJ)

- For cutting hard porcelain tiles with the best performance.
- · Specially recommended for straight cuts and high speed cutting.
- Thanks to J-Slot typology, this disc increases cutting speed on very hard porcelain tiles, while reducing the stresses generated throughout out the cut.
- · It's original design is for dry cutting, but also allows wet cutting.

	REF.	\bigcirc		\odot		RPM	-
CPJ 115 SUPERPRO	32932	4 1/2" 115 mm	7/8"	1/8"	3/8"	13300 max.	F
CPJ 125 SUPERPRO	32933	4 7/8" 125 mm	22,2 mm	1,4 mm	8 mm	12250 max.	٦



CATEGORY: SUPERPRO	MARBLE	FAST
		,

MARBLE ELECTROPLATED DIAMOND BLADE (EMG)

- Recommended electroplated diamond blade to cut marble, limestone and fibres.
- Less vibration. To cut those materials with high risk of breaking, as marble and fibres.

	REF.	Q		•		RPM	=
EMG 115 SUPERPRO	30995	4 1/2" 115 mm	7/8" 22,2 mm	1/8" 2,2 mm	1/8" 3 mm	13300 max.	5



CATEGORY: SUPERPRO	METAL, PLASTIC, WOOD	FAST

DIAMOND BLADE RESCUE (RSQ)

- Recommended disc for cutting all types of materials including metal, plastic and wood, and more.
- · Vacuum Brazed Technology.
- Increased resistance to high temperatures during cutting, reduction of spark generated.
- · High speed and performance.

	REF.	Q	\odot	\odot		RPM	
RSQ 115 SUPERPRO	30900	4 1/2" 115 mm	7/8"	1/8" 2.8 mm	1/8"	13300 max.	5
RSQ 230 SUPERPRO	30902	9 1/8" 230 mm	22,2 mm	1/8" 3,0 mm	4 mm	6650 max.	1




CATEGORY: SUPERPRO	NO VIBRATIONS	GOOD FINISH

CUTTING & GRINDING BLADES

- For cutting and grinding soft natural stone and ceramic tiles and synthetic materials.
- $\boldsymbol{\cdot}$ For adjustment cuts and grinding on all types of porcelain and hard materials.
- $\boldsymbol{\cdot}$ Electroplated continuous rim blade.
- $\boldsymbol{\cdot}$ Two-sided and reversible blade for a better performance.
- For grinders use. Connection: M14 thread.

	REF.	O	○	\odot		RPM	=
ECD 115 2IN1 SUPERPRO	31964	4 1/2" 115 mm	M14"	1/8"	1/4"	13300 max.	1
ECD 125 2IN1 SUPERPRO	31965	4 7/8" 125 mm	M14 mm	1,8 mm	5,6 mm	12250 max.	

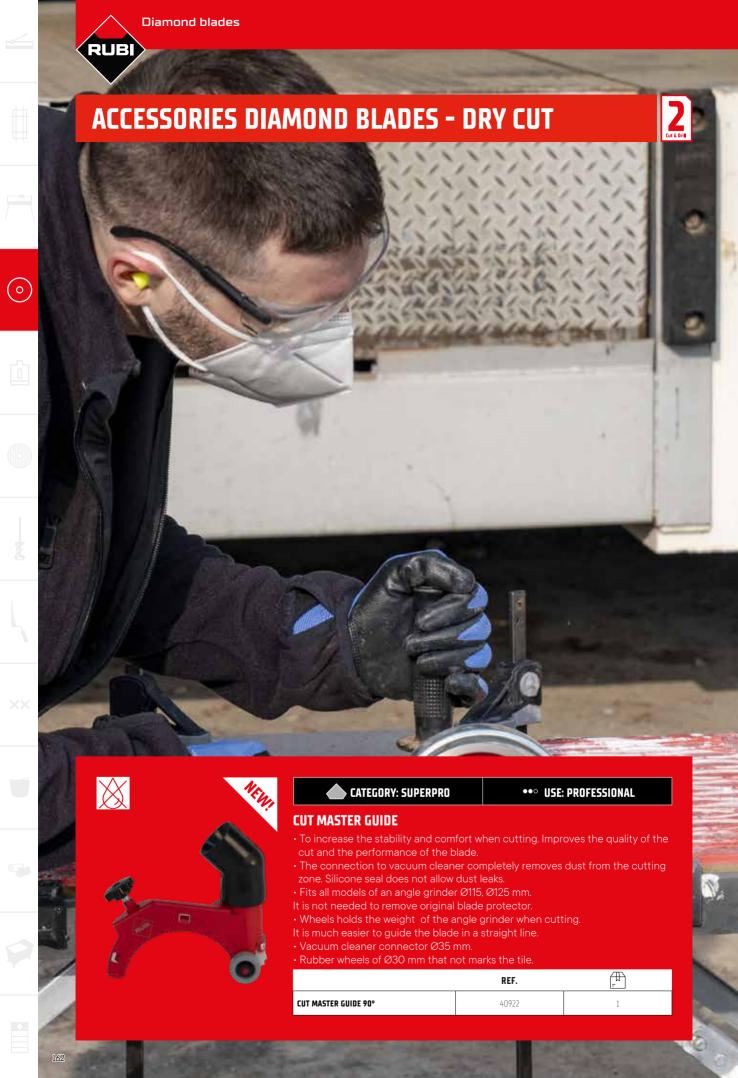



DIAMOND BLADES - WET CUT

· DIAMOND BLADES COOLED WITH WATER.









GENERAL PURPOSE SEGMENTED DIAMOND BLADE (SHR)

- Recommended for cutting building materials such as brick, concrete, terrazzo.
- The fastest. Maximum speed and best blade's cooling. To cut materials with more than 1" (25 mm) thickness.

	REF.	O		\odot		RPM	=
SHR 250 PRO	32974	9 7/8" 250 mm	1 1/8"	1/8" 2,6 mm	3/8"	6150 max.	1
SHR 350 SUPERPRO	32971	13 3/4" 350 mm	25,4 mm	1/8" 3 mm	10 mm	4400 max.	



CATEGORY: SUPERPRO	CATEGORY: PRO	UNIVERSAL CERAMIC	GOOD FINISH

CERAMIC TILES CONTINUOUS RIM DIAMOND BLADE (CEV)

- Blade for general cut of ceramic tiles as wall tile, floor tiles, porcelain.
- The best finish. To cut and mitre ceramic tiles and other stone coating materials with less than 3/4" (20 mm) thickness.

	REF.	Q	<u></u>	(1)	(RPM	
CEV 180 PRO	25912	7 1/8" 180 mm	7/8-1 1/8" 22,2 - 25,4 mm	1/8"		8500 max.	3
CEV 200 PRO	25913	7 7/8" 200 mm	11/8"	1,7 mm		7650 max.	1
CEV 250 PRO	25934	9 7/8" 250 mm	25,4 mm	1/8" 2,2 mm	3/8"	6150 max.	1
CEV 180 SUPERPRO	30945	7 1/8" 180 mm	7/8–1 1/8" 22,2 - 25,4 mm	1/8"	8 mm	8500 max.	3
CEV 200 SUPERPRO	30946	7 7/8" 200 mm		1,7 mm		7650 max.	
CEV 250 SUPERPRO	30949	9 7/8" 250 mm	1 1/8" 25,4 mm	1/8"		6150 max.	1
CEV 300 SUPERPRO	30950	11 3/4" 300 mm		2,2 mm	3/8" 10 mm	5100 max.	



CATEGORY: SUPERPRO	HARD MATERIAL	GOOD FINISH

HARD MATERIALS CONTINUOUS RIM DIAMOND BLADE (CPA)

- Recommended for cutting hard materials such granite, rustic tiles, clinker, firebricks or slate.
- The best finish. To cut and mitre ceramic tiles and other stone coating materials.

	REF.	Q		\odot		RPM	=
CPA 180 SUPERPRO	30925	7 1/8" 180 mm	7/8" 22,2 mm	1/8"		8500 max.	3
CPA 200 SUPERPRO	30926	7 7/8" 200 mm		1,7 mm	3/8" 8 mm	7650 max.	
CPA 250 SUPERPRO	30929	9 7/8" 250 mm	1 1/8"	1/8"		6150 max.	1
CPA 300 SUPERPRO	30930	11 3/4" 300 mm	25,4 mm	2,2 mm	3/8"	5100 max.	1
CPA 350 SUPERPRO	30931	13 3/4" 350 mm		1/8" 2,6 mm	10 mm	4400 max.	



CATEGORY: SUPERPRO HARD MATERIAL FAST GOOD FINISH

HARD MATERIALS TURBO VIPER DIAMOND BLADE (TVH)

- $\boldsymbol{\cdot}$ Recommended blade for cutting hard materials such as granite, rustic tiles, clinker, refractory, slate, quartzite and porcelain tile.
- The specific design of the diamond band offers greater speed of cutting harder materials without sacrificing finish quality.
- For cutting materials > 3/4" (20 mm) thickness.
- · Only for straight cuts, not suitable for mitring.

	REF.	\bigcirc		\odot	\bigcirc	RPM	
TVH 200 SUPERPRO	31936	7 7/8" 200 mm		1/8"		7650 max.	
TVH 250 SUPERPRO	31937	9 7/8" 250 mm	11/8"	1,6 mm	3/8"	6150 max.	1
TVH 300 SUPERPRO	31938	11 3/4" 300 mm	25,4 mm	1/8" 2 mm	10 mm	5100 max.	1
TVH 350 SUPERPRO	31939	13 3/4" 350 mm		1/8" 2,4 mm		4400 max.	



CATEGORY: PRO	PORCELANIC	GOOD FINISH

PORCELAIN TILES CONTINUOUS RIM DIAMOND BLADE (CPC)

- Recommended blade to cut fine porcelain tiles with less than 3/4" (20 mm).
- · Specially recommended for mitre cutting.

	REF.	\bigcirc		\odot		RPM	
CPC 180 PRO	30955	7 1/8" 180 mm	7/8-1 1/8" 22,2 - 25,4 mm	1/8"		8500 max.	3
CPC 200 PRO	30956	7 7/8" 200 mm	1 1/8" 25,4 mm	1,7 mm	3/8"	7650 max.	
CPC 230 PRO	30958	9 1/8" 230 mm	7/8-1 1/8" 22,2 - 25,4 mm	1/8" 2 mm	8 mm	6650 max.	
CPC 250 PRO	30959	9 7/8" 250 mm	1 1/8"	1/8"		6150 max.	1
CPC 300 PRO	30960	11 3/4" 300 mm	25,4 mm	2,2 mm	3/8" 10 mm	5100 max.	



CATEGORY: PRO	PORCELANIC	FAST	GOOD FINISH

PORCELAIN TILES J-SLOT DIAMOND BLADE (CPX)

- $\boldsymbol{\cdot}$ Recommended disc to cut fine porcelain tiles.
- $\boldsymbol{\cdot}$ High Tech. High speed on straight cuts on porcelain tiles >20 mm.

	REF.	Q	\odot	\odot		RPM	[-[
CPX 200 PRO	30964	7 7/8" 200 mm				7650 max.	
CPX 250 PRO	30962	9 7/8" 250 mm	1 1/8" 25,4 mm	1/8" 1,6 mm	3/8" 8 mm	6150 max.	1
CPX 300 PRO	30963	11 3/4" 300 mm				5100 max.	







PORCELANIC



DIAMOND PORCELAIN STONEWARE TURBO MITRE (TPI)

- For the mitre cut of porcelain tiles. High stability and speed of cut.
- · Sintered TURBO blade.
- · Laser welding.

	REF.	\bigcirc		•		RPM	=
TPI 200 SUPERPRO	31966	7 7/8" 200 mm				7650 max.	
TPI 230 SUPERPRO	31967	9 1/8" 230 mm	1 1/8" 25,4 mm	1/8" 2,5 mm	3/8" 8 mm	6650 max.	1
TPI 250 SUPERPRO	31969	9 7/8" 250 mm				6150 max.	



CATEGORY: PRO	PORCELANIC	LANDSCAPING	LONG LIFE	FAST

PORCELAIN TILES DIAMOND BLADE 2CM PRO (TPL)

- · Specially designed for landscaping materials.
- Ideal for cutting porcelain, ceramic, natural stone and sintered stone materials of > 20 mm.
- A great combination of high performance and cutting speed with high-quality finishes
- With holes in the core to help cool the disc and distribute water evenly across the disc.

	REF.	Q		\odot	\bigcirc	RPM	=
TPL 250 EXT PRO	40913	9 7/8" 250 mm	1 1/8"	1/8"	3/8"	6150 max	1
TPL 300 EXT PRO	40914	11 3/4" 300 mm	25,4 mm	1,4 mm	8,5 mm	5100 max	1



CATEGORY: SUPERPRO PORCELANIC LANDSCAPING LONG LIFE VERY						
CATEGORY: SUPERPRO PORCELANIC LANDSCAPING LONG LIFE VERY	FAST	VERY FAST	LONG LIFE	LANDSCAPING	PORCELANIC	CATEGORY: SUPERPRO

PORCELAIN TILES DIAMOND BLADE 2CM SUPERPRO (SPL)

- Specially designed for landscaping materials.
- Ideal for cutting porcelain, ceramic, natural stone and sintered stone materials of > 20 mm.
- · Segmented.
- Due to the diamond rim's special alloy, these types of materials can be cut quickly and have an extra-long life.
- Good finish.

	REF.	O		\odot		RPM	=
SPL 250 EXT SUPERPRO	40910	9 7/8" 250 mm	1 1/8" 25.4 mm	1/8" 1.6 mm	3/8" 10 mm	6150 max.	1





CATEGORY: PREMIUM PORCELANIC LANDSCAPING **VERY FAST**

PORCELAIN TILES PREMIUM 2CM DIAMOND BLADE (SPT)

- Joint by laser welding.Extra-long life.
- Suitable for use on cutting tables and cut-off machines that incorporate guard systems in compliance with the standard for use of segmented blades.
- Special bonded alloy that provides a good finish with a very fast cutting speed.

	REF.	Q	⊕	\odot		RPM	
COT SEO EVT DDEMIUM	7707/	9 7/8"		1/8"		6150 max.	
SPT 250 EXT PREMIUM	32934	250 mm		2,2 mm		OIDU IIIdX.	
SPT 300 EXT PREMIUM	32935	11 3/4"	1 1/8"		3/8"	5100 max.	1
SPI 300 EXI PREMIUM	32935	300 mm	25,4 mm	1/8"	10 mm	JIUU IIIdx.	1
SPT 350 EXT PREMIUM	32936	13 3/4"		2,4 mm		4400 max.	
JET JJU EAT PREMIUM	32936	350 mm				4400 IIIdX.	







ABRASIVE MATERIALS TURBO DIAMOND BLADE (TON)

- · Recommended blades to cut abrasive materials such as bricks, calcareous terrazzo, marble, sandstone.
- · A great combination. High performance and cutting speed with high standard

	REF.	Q	\odot	\odot		RPM	=
TON 250 SUPERPRO	31909	9 7/8" 250 mm	11/8" 25.4 mm	1/8" 2.5 mm	1/4" 7.5 mm	6150 max.	1
		230 111111	22,111111	2,2	7,2		



GENERAL PURPOSE

Recommended blade for cutting concrete and hard materials such as granite, slate, refractory, brick,



GENERAL PURPOSE

Recommended blade for general cutting of building materials such as brick, concrete, terrazzo, natural stone, etc.



GENERAL CERAMIC

MATERIAL Recommended blades for cutting marble, fibres and other materials with high breakage risk.



HARD MATERIALS

Recommended blade for cutting hard materials such as granite, slate, firebrick, etc.



PORCELAIN

Recommended blades for fine cuts of porcelain tiles.



Recommended blades for cutting abrasive materials such as bricks, calcareous terrazzo, marble. sandstone, etc.



MARBLE

Recommended blade for cutting marble, limestone and fibres.



Recommended blade for cutting all kinds of materials such as steel sheet, wood, masonry materials, fiberglass, PVC, steel rods, concrete, reinforced concrete, etc ..



CONTINUOUS RIM

The best finish, for cutting and mitring ceramic tiles and other stone coating materials <1" (25mm) thickness.



A great combination. High performance and speed of cut with high quality finishings.



SEGMENTED

The Fastest. Maximum speed and best blade's cooling. To cut materials >1" (25mm) thickness.



VACUUM BRAZED

The most versatile. Due to his versatility in not petrous materials and cutting speed.



ELECTROPLATED

Less vibration. To cut those materials with high risk of breaking as marble or fibres.



High-Tech. High speed on hardest materials. Specially designed for straight cuts on porcelain tiles.





Best of a TURBO, with the best finishes and cutting speed.





</l></l></l></l></l></

CONTINU	IOUS RIM	J-SLOT		TU	RBO			VII	PER			5	EGMENTE	:D		ELECTR	ELECTROPLATED VACUU BRAZE	
CSV	CPR	CPJ	TSV	TSA	TCR	TLG	TVR	TVA	MINI	TGS	STT	SEV	SHA	SCA	SON	EMG	ECD	RSQ
									TVA									
0																		
										0						0	0	
																	0	
0			0	0		0	0	0		0	0	0	0	0				
0			0	0			0	0	0	0		0	0	0				
						0	0	0		0								
0			0							0	0			0	0	0		
0	0	0			0	0	0	0		0							0	
			0								0	0			0			
			0	0		0	0	0	0		0	0	0	0	0		0	0
			0								0	0			0			
																		6
																		6
																		6



	(CONTINUOUS RIM	1	J-SLOT TURBO \		VIPER		SEGMENTED			
<i>)</i>	CEV	СРА	СРС	СРХ	TON	TPI	TPL	TVH	SPL	SHR	SP
	0										
MIC											
					0					0	
> .											
is j			0								
>	0	0					0	0	0	0	
NITE		0					0			0	
		0						0			
D (E											
DS-							0		o		•
Nu											
BLE	0				o					0	
1	0	0	0	0		0	0	0	0		
CELAIN S											
ASIVE					o					0	
ASIVE ERIAL											
TE .		0					0	0	0	0	6
1											
CRETE					0					0	
>											6
STIC											
00											6
7											
AL											6

##





























DRILLING

Tools for drilling ceramic tile, stoneware, marble, granite and other materials.



TUNGSTEN CARBIDE DRILL BITS

- · TUNGSTEN CARBIDE BITS FOR DRILLING WALL TILES.
- ADAPTABLE TO MANUAL DRILL AND HEAD FOR ELECTRIC DRILL WITHOUT HAMMER.











MATERIAL: CERAMIC TILE

ELECTRIC DRILL WITHOUT PERCUSSION

AD.

TUNGSTEN CARBIDE DRILL BITS

• Tungsten carbide drill bits for wall tiles. Adaptable to head for use with electric drill without hammer (ref. 04992).

	REF.	RPM			
DRILL BIT 1 3/8" (35 MM.)	04962				
DRILL BIT 1 3/4"(45 MM.)	04964	800 max.	3/4" 18 mm	5	780
DRILL BIT 2 1/4" (55 MM.)	04965				





CATEGORY: PRO



- Attachable to all measures of Tungsten Carbide drill bits.
- · Supplied in blister.

	REF.	- H
HEAD WITH CENTRAL ATTACHMENT DRILL BIT	04992	1







DIAMOND DRILL BITS - DRY CUT

· FOR DRY DRILLING OF WALL TILES, FLOOR TILES AND PORCELAIN TILES.









DRYGRES DRILL BITS

- For dry drilling in ceramic, porcelain, natural stone and other materials.
- Maximum operating speed 14,000 r.p.m. M14 thread finish. Usable with grinder. Supplied in blister.

	REF.	RPM		=
DRYGRES DRILL BIT 0 1/4" (6 MM.)	05988			
DRYGRES DRILL BIT 0 2/7" (7 MM.)	05994			
DRYGRES DRILL BIT 0 5/16" (8 MM.)	05989	14000 max.		
DRYGRES DRILL BIT 0 3/8" (10 MM.)	05990	14000 IIIdX.		
DRYGRES DRILL BIT 0 1/2" (12 MM.)	05991			
DRYGRES DRILL BIT 0 3/4" (20 MM.)	04910			
DRYGRES DRILL BIT 0 1" (25 MM.)	57903	14000		
DRYGRES DRILL BIT Ø 1 1/8" (28 MM.)	04911			1
DRYGRES DRILL BIT 0 1 3/8" (35 MM.)	04912	_	1 3/8" 36 mm	
DRYGRES DRILL BIT 0 1 3/4" (43 MM.)	04913			
DRYGRES DRILL BIT Ø 2" (50 MM.)	04914	1/000		
DRYGRES DRILL BIT 0 2 3/8" (60 MM.)	04915	14000 max.		
DRYGRES DRILL BIT Ø 2 1/2" (65 MM.)	04916			
DRYGRES DRILL BIT 0 2 11/16" (68 MM.)	04917			
DRYGRES DRILL BIT 0 3" (75 MM.)	05992			
DRYGRES DRILL BIT Ø 3 1/8" (80 MM.)	57904			
DRYGRES DRILL BIT 0 3 1/4" (85 MM.)	57906	1/,000		
DRYGRES DRILL BIT 0 4" (100 MM.)	57907	14000		
DRYGRES DRILL BIT 0 4 3/4" (120 MM.)	57908			







MATERIAL: PORCELAIN TILE GRINDER

ELECTRIC DRILL WITHOUT PERCUSSION



- $\boldsymbol{\cdot}$ They can be used both with grinders or drill without hammer, using the included adapter kit.
- The kit includes: MULTIDRILL guide with carry case. Ref.50917, Ref.50936, Ref.50996.
- · Dry cutting diamond drill bits:
- Ø1 1/8"(28mm),1 3/8"(35mm),1 3/4"(43mm)& 2 11/16"(68mm).
- Ø1 1/8"(28mm),1 3/8"(35mm),1 3/4"(43mm),2"(50mm)&2 11/16"(68mm).
- Ø1/4"(6mm),5/16"(8mm),3/4"(20mm),1 3/8"(35mm),50 &2 11/16"(68mm).

	REF.	RPM		<u></u>
KIT 4 BITS DRYGRES	50917			
KIT 5 BITS DRYGRES	50936	14000 max.	1 3/8" 36 mm	1
KIT 6 BITS DRYGRES	50996			



CATEGORY: SUPERPRO	43	MATERIAL: PORCELAIN TILE	GRINDER	ELECTRIC DRILL WITHOUT PERCUSSION

KIT MINI DRYGRES

- Dry cutting diamond drill bits for drilling porcelain tiles, glazed tiles, natural stone and other ceramics.
- They can be used both with grinders or drill without hammer, using the included adapter kit.
- · Kit includes:
- - Drill Ø 1/4"(6 mm), 5/16"(8 mm), 3/8"(10 mm) and 1/2"(12 mm).
- · Case.

	REF.	RPM		<u>-</u>
KIT MINI DRYGRES	50938	14000 max.	1 3/8" 36 mm	1






KIT TCR BLADE AND DRYGRES DRILL BITS

- They can be used both with grinders or drill without hammer, using the included adapter kit.
- · Kit includes:
- Dry diamond cutting disc TCR-115.
- Four dry cutting diamond drill bits (2x6mm, 20mm, 35mm)(2x1/4", 13/16", 13/8").

	REF.	= 1
KIT TCR BLADE AND DRYGRES DRILL BITS	68923	1

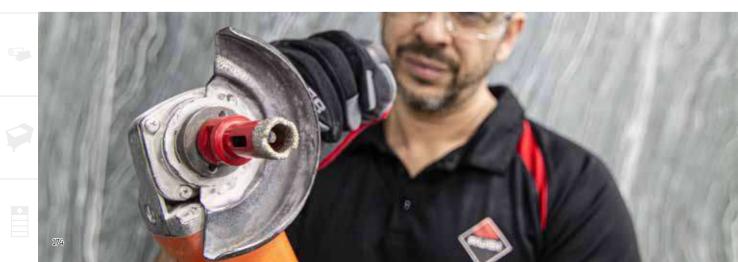

















DRYGRES PREMIUM DRILL BITS

- Designed for the fast drill of any kind of ceramic tiles including porcelain, but also suitable to drill natural stone as granite or marble, and sintered stone.
- · Vacuum brazed type drill bits that provides a very fast dry drilling with very good quality.
- Resistant brazed of diamond grits and great quality materials for extra long life.
- Integrated wax only in the smallest diameters (6 12 mm) to help cooling and lubrication during drilling.
- · Side openings for better cooling due to greater air circulation in biggest diameters (20 - 85 mm).
- Air cooled through the own rotation but also recommended to use small orbital movements with the tool to help cooling.
- They can be used both with grinders or drill without hammer, using the included adapter kit.

	REF.	RPM		
DRYGRES PREMIUM DRILL BITS 0 6 MM.	06900			
DRYGRES PREMIUM DRILL BITS 0 7 MM.	06915			
DRYGRES PREMIUM DRILL BITS 0 8 MM.	06918			
DRYGRES PREMIUM DRILL BITS 0 10 MM.	06919		1 1/8"	
DRYGRES PREMIUM DRILL BITS 0 12 MM.	06929		30 mm	
DRYGRES PREMIUM DRILL BITS 0 20 MM.	06971			
DRYGRES PREMIUM DRILL BITS 0 28 MM.	06972			
DRYGRES PREMIUM DRILL BITS 0 35 MM.	06973	14000		1
DRYGRES PREMIUM DRILL BITS 0 43 MM.	06974			
DRYGRES PREMIUM DRILL BITS 0 50 MM.	06975			
DRYGRES PREMIUM DRILL BITS 0 60 MM.	06976			
DRYGRES PREMIUM DRILL BITS 0 65 MM.	06977		1 1/2" 38 mm	
DRYGRES PREMIUM DRILL BITS 0 68 MM.	06978			
DRYGRES PREMIUM DRILL BITS 0 75 MM.	06979			
DRYGRES PREMIUM DRILL BITS Ø 85 MM.	06980			



CATEGORY: PREMIUM

MATERIAL: PORCELAIN TILE EXTRA LONG LIFE GRINDER

ELECTRIC DRILL WITHOUT PERCUSSION

KIT DRYGRES PREMIUM

- They can be used both with grinders or drill without hammer, using the included adapter kit.
- The kit includes: MULTIDRILL guide with carry case. Ref.51931, Ref.51937, Ref.51929
- · Dry cutting diamond drill bits:
- Ø1 1/8"(28mm),1 3/8"(35mm),1 3/4"(43mm)& 2 11/16"(68mm).
- Ø11/8"(28mm),13/8"(35mm),13/4"(43mm),2"(50mm)&211/16"(68mm).
- Ø1/4"(6mm),5/16"(8mm),3/4"(20mm),1 3/8"(35mm),50 &2 11/16"(68mm).

	REF.	RPM	=
KIT 4 DRILL BITS DRYGRES PREMIUM	51931		
KIT 5 DRILL BITS DRYGRES PREMIUM	51937	14000	1
KIT 6 DRILL BITS DRYGRES PREMIUM	51929		



Ó









Û





KIT MINI DRYGRES PREMIUM

- Dry cutting diamond drill bits for drilling porcelain tiles, glazed tiles, natural stone and other ceramics.
- They can be used both with grinders or drill without hammer, using the included adapter kit.
- · Kit includes:
- - Drill Ø 1/4"(6 mm), 5/16"(8 mm), 3/8"(10 mm) and 1/2"(12 mm).
- · Case

	REF.	RPM	=
KIT MINI DRYGRES PREMIUM	51939	14000	1





DRYGRES DRILL BITS 4DRILL

- Specially designed for dry drilling in porcelain stoneware. Suitable for other ceramic materials, natural stone and artificial stone.
- With high resistant welding of the diamond grains for a longer duration.
- "Easy-Start" Without slipping. Suitable for work without a centring guide.
- Perfect for cordless drills (1000 2500 rpm).
- Reinforced body with grub screw for better performance and rigidity, thus maintaining the wax on the tip of the drill (no wax Ø28 & Ø35 mm models).
- · High quality finish.
- Designed to be used exclusively with either a cordless drill or an electric drill.
- Their hexagonal connection allows them to adapt quickly to drills with a 10 mm chuck.

REF.	RPM		
05923			
05924		1 7/16" 36 mm	
05926	1000 min		1
05927	1000 11111.		
05928			
05929		1 7/16" 40 mm	
05970	7000 min		
05971	2000 11111.		
	05923 05924 05926 05927 05928 05929	05923 05924 05926 05927 05927 05928 05929 05970 2000 min.	05923




CATEGORY: SUPERPRO	MATERIAL: PORCELAIN TILE	LONG LIFE	CORDLESS POWER DRILL

KIT DRYGRES 4DRILL

- For dry drilling in porcelain stoneware. Suitable for other ceramic materials, natural stone and artificial stone.
- · Hexagonal connection, compatible with battery drills.
- · Kit composed of:
- DRYGRES 4DRILL diamond drills dry cut Ø 6, 8, 10 and 12 mm.
- · With case.

	REF.	RPM	=
KIT DRYGRES 4DRILL	05939	1000 min.	1



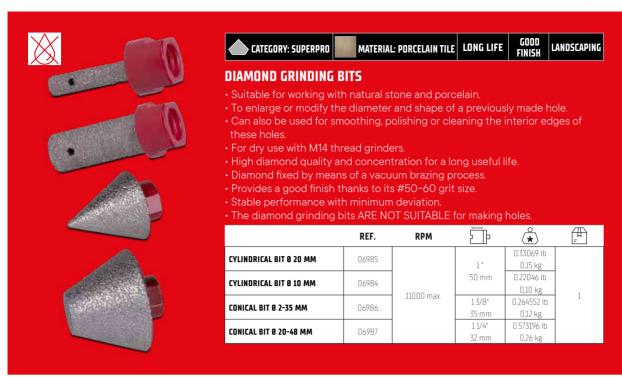

DIAMOND DRILL BITS - WET CUT

 FOR WET DRILLING OF WALL TILES, FLOOR TILES, PORCELAIN AND OTHER MATERIALS.





Ó





FORAGRES DRILL BITS 0 13/16" TO 4 3/4" (20 - 120 MM.)

- To drill floor tiles, porcelain tiles, granite and marble.
- Always use cooled with water and non-hammer electric drill.
- Ø 15/8" (40 mm.) drill bit, designed for housing of toilet flushing mechanisms.
 Supplied in blister.



	REF.	RPM		=	
FORAGRES DRILL BIT 3/4" (20 MM.)	04970				
FORAGRES DRILL BIT 1 1/8" (28 MM.)	04971	900 max.			
FORAGRES DRILL BIT 1 3/8" (35 MM.)	04972				
FORAGRES DRILL BIT 1 5/8" (40 MM.)	04963		11/8" 30 mm	1	
FORAGRES DRILL BIT 2" (50 MM.)	04973				
FORAGRES DRILL BIT 2 1/2" (65 MM.)	04974				
FORAGRES DRILL BIT 2 11/16" (68 MM.)	04918				
FORAGRES DRILL BIT 3" (75 MM.)	04975		1 1/4" 33 mm		
FORAGRES DRILL BIT 4" (100 MM.)	04976	450 max.	1 1/8"		
FORAGRES DRILL BIT 4 3/4" (120 MM.)	04977		30 mm		

Û





KIT FORAGRES

- · Kit includes:
- · MULTIDRILL Guide.
- · Tank and hose.
- Diamond drill bits Ø 3/4", 11/8", 13/8", 13/4", 2" and 2 11/16" (Ø 20, 28, 35, 43, 50, 68 mm). Case.

	REF.	RPM		=
KIT FORAGRES	50903	900 max.	1 1/8" 30 mm	1





EASY GRES DRILL BITS

- Diamond drill bits to be used with electric drill without hammer.
- The quality of the diamond allows the drilling of ceramics, porcelain, granite, marble and glass.
- Ideal to install bathroom accessories and any type of decorative accessories over ceramic surfaces.
- They must always be used with the EASY GRES guide which allows their adequate cooling ensuring a high accuracy and good results.
- · Body made of steel and bit made of electrodeposited diamond.
- Lateral opening to improve cooling of the drill bit and to allow the elimination of solid waste produced after the drilling of the hole.
- Recommended speed of use between 400 and 1000 r.p.m. depending of the material to be drilled.
- To achieve a better finish and a longer life of the drill bit, it's important to observe the adequate speed of use and to apply a moderate pressure during the drilling.
- · Supplied in blister.

	REF.	RPM		=	
EASY GRES DRILL BIT 7/32" (6 MM.)	04922				
EASY GRES DRILL BIT 1/4" (6.5 MM.)	04920				
EASY GRES DRILL BIT 5/16" (8 MM.)	04923	1000 max.	1" 25 mm	10	4600
EASY GRES DRILL BIT 3/8" (10 MM.)	04924				
EASY GRES DRILL BIT 1/2" (12 MM.)	04921				
EASY GRES DRILL BIT 3/4" (20 MM.)	05961				
EASY GRES DRILL BIT 1 1/8" (28 MM.)	05962				
EASY GRES DRILL BIT 1 3/8" (35 MM.)	05963				
EASY GRES DRILL BIT 1 5/8" (40 MM.)	05964				
EASY GRES DRILL BIT 1 3/4" (43 MM.)	05965				
EASY GRES DRILL BIT 2" (50 MM.)	05966	500 max.	1 1/8"	1	
EASY GRES DRILL BIT 2 1/4" (55 MM.)	05967	Suu max.	27 mm	1	
EASY GRES DRILL BIT 2 1/2" (65 MM.)	05969				
EASY GRES DRILL BIT 2 11/16" (68 MM.)	05978				
EASY GRES DRILL BIT 3" (75 MM.)	05979				
EASY GRES DRILL BIT 4" (100 MM.)	05981				
EASY GRES DRILL BIT 4 3/4" (120 MM.)	05982				



CATEGORY: PRO

MATERIAL: PORCELAIN TILE

ELECTRIC DRILL WITHOUT PERCUSSION

EASY GRES DRILL BIT SETS 0 7/32" TO 1/2" (6 - 12 MM.)

- The EASY GRES guide allows holes both vertically and horizontally, thanks to its functional design incorporating a water tank with flow control valve.
- The EASY GRES guide attaches easily to any surface, thanks to its renewable adhesives

	REF.	RPM			
EASY GRES DRILL BIT 7/32" (6 MM.) SET	04927				800
EASY GRES DRILL BIT 5/16" (8 MM.) SET	04928	1000			420
EASY GRES DRILL BIT 3/8" (10 MM.) SET	04929	1000 max.	1" 25 mm	10	800
EASY GRES DRILL BIT 1/4" AND 3/8" (6.5 AND 10 MM.) SET	04909				810
KIT EASY GRES BITS 0 6,8,10 AND 12 MM .	04904	1000			





MATERIAL: PORCELAIN TILE

ELECTRIC DRILL WITHOUT PERCUSSION

KIT EASY GRES PLUS

- The kit includes:
- MULTIDRILL guide.
- · Water tank and hose.
- EASY GRES drills Ø 3/4", 11/8", 13/8", 13/4", 2", 21/2" and 3" (20, 28, 35, 43, 50, 65 and 75 mm.) and case.

	REF.	RPM		=
KIT EASY GRES PLUS	50937	500 max.	1 1/8" 27 mm	1



CATEGORY: PRO

MATERIAL: PORCELAIN TILE

ELECTRIC DRILL WITHOUT PERCUSSION

EASY GRES DRILL BIT 0 1 3/8 (35 MM.) SET

- The kit includes:
- $\cdot \, \mathsf{MULTIDRILL} \, \mathsf{guide}.$
- Water tank and hose.
- \cdot EASY GRES drill bit Ø 1 3/8" (35 mm).

	REF.	RPM		<u>-</u>
EASY GRES DRILL BIT 0 1 3/8" (35 MM.) Set	50921	500 max.	1 1/8" 27 mm	1



















ACCESSORIES FOR DIAMOND DRILL BITS

· GUIDANCE SYSTEMS, AND OTHER ACCESSORIES FOR DIAMOND DRILLS.



 \sqrt{m}

ELECTRIC DRILL WITHOUT PERCUSSION



C



TANK FOR MULTIDRILL GUIDE

- Bottle of 1200 ml. volume, with manual pressure pump.
- · Includes 2 m. hose.

	REF.	
TANK AND HOSE FOR MULTIDRILL GUIDE	50947	1





MULTIDRILL GUIDE

- By fixing with suction cup, allows horizontal and vertical holes in the right place, preventing the drill bit from slipping.
- · Compatible with all Rubi diamond drill bits, Ø 6 to 83 mm.
- Includes hose and tank connection (Ref. 50947).

	REF.	<u>-</u>
MULTIDRILL GUIDE (MÁX. Ø 83 MM.)	50944	1





MULTIDRILL PLUS RM GUIDE

- By fixing the guide with the suction cup, allows horizontal and vertical holes in the correct place, preventing the drill bit from slipping on any type of surface: smooth, rough or slightly structured.
- · Compatible with all Rubi diamond drill bits, Ø 6 to 120 mm.
- $\boldsymbol{\cdot}$ Metal centring guide for greater wear resistance.
- Includes hose and tank connection (Ref. 50947).

	REF.	=	
MULTIDRILL PLUS GUIDE RM (MAX. Ø 120 MM)	51908	1	





CATEGORY: SUPERPRO	MATERIAL: PORCELAIN TILE	GRINDER
--------------------	--------------------------	---------

DRYGRES DRILL BITS

- $\boldsymbol{\cdot}$ For dry drilling in ceramic, porcelain, natural stone and other materials.
- $\boldsymbol{\cdot}$ Maximum operating speed 14,000 r.p.m. M14 thread finish.
- $\boldsymbol{\cdot}$ They can be used both with grinders or drill without hammer, using the included adapter kit.
- · Usable with grinder. Supplied in blister.

	REF.	RPM		=
M14 ADAPTER FOR ELECTRIC DRILL	05976	14000 max.	1 3/8"	1
			36 mm	



 \odot

1

(X

DRILL BIT CHARACTERISTICS

			REF	0 MM	Ø INCH	RPM	Ţ (mm	inch	USE
		Φ	04970	20	3/4"				
		Marbl	04971	28	1 1/8"	-			
		anite,	04972	35	13/8"				[] [] ELECTRIC DRILL
		es, Gra	04963	40	15/8"	max.	30	1 3/16"	Without percussion
	iRES	ain tile	04973	50	2"	900			± 0.
	FORAGRES	orcel	04974	65	2 1/2"	-			
		tiles, F	04918	68	2 11/16"				LICE with Multidaill dailling guide /
		Tile, Ceramic tiles, Porcelain tiles, Granite, Marble	04975	75	3"		33	1 5/16"	USE with Multidrill drilling guide / MULTIDRILL PLUS RM. + Water tank and hose
		le, Cer	04976	100	4"	max.	00	1 3/16"	(Ref. 50944/51908 + 50947)
		╒	04977	120	4 3/4"	450	30	13/10	
ν			04927	6	14/64"				
L BIT			04925	6,5	1/4"	Between			
R F			04928	8	5/16"	400 &	25	1 "	ELECTRIC DRILL Without percussion
O DIAMOND DRILL BITS			04929	10	13/32"	1.000			USE with Multidrill drilling guide
IAM		aî.	04926	12	1/2"				+ Water tank and hose (Ref. 50944 + 50947)
		Tile, ceramic Tiles, Porcelain tiles, Granite, Marble, Glass	05961	20	3/4"				
		iles, G	05962	28	1 1/8"				
	S	elain t	05963	35	13/8"				
	EASYGRES	ïles, Porcelain Marble, Glass	05964	40	1 5/8"				U ∐ ELECTRIC DRILL
	M	Tiles	05965	43	13/4"	_			Without percussion
		eramic	05966	50	2"	max.	27	1 1/16"	
		File, ce	05967	55	2 1/4"	500		. ,	点的
			05969	65	2 1/2"				USE with Multidrill drilling guide /
			05978	68	2 11/16"				MULTIDRILL PLUS RM. + Water tank and hose
			05979	75	3"				(Ref. 50944/51908 + 50947)
			05981	100	4"				
			05982	120	4 3/4"				
SITS	BULL NOSE	Porcelain, Natural Stone and Landscaping Materials	52938	20	13/16"	max.	20	13/16"	
DIAMOND DRILL BITS	Ø Z		52939	R10	3/8"	14.000			
	LA	latura	06986	2-35	1 1/16" - 1 3/8"	-	32	1 1/4"	
AMDIA	ê	Porcelain and Natural Stone	06987	20-48	13/16" - 1 7/8"	max.			GRINDER
\X	L L	selain	06984	10	3/8"	11.000	45	1 3/4"	
\sim	고 품	Porc	06985	20	13/16"		50	1 15/16"	



			REF	0 MM	0 INCH	RPM	↑ mm	inch	USE	
			06900	6	14/64"					
			06915	7	1/4"					
		ırble	06918	8	5/16"					
		Σ	06919	10	13/32"			- 2/1/2	GRINDER	
		Tile, Ceramic tiles, Porcelain tiles, Granite, Marble	06929	12	1/2"		30	1 3/16"	13/10	
	DRYGRES PREMIUM	s, Gr	06971	20	3/4"					
	E E	tile	06972	28	1 1/8"				U U	
	2 E	ela:	06973	35	13/8"	max. 14.000			ELECTRIC DRILL Without percussion	
	2	Porc	06974	43	13/4"	14.000			Without poloubololi	
	R	tiles,	06975	50	2"				0	
		E 1 1	06976	60	2 3/18"				(45)	
		Cera	06977	65	2 1/2"		38	1 1/2"		
		ie, e	06978	68	2 11/18"				MULTIDRILL GUIDE /	
		'	06979	75	3"				MULTIDRILL PLUS RM	
			06980	85	3 3/8"					
			05988	6	14/64"					
			05994	7	1/4"					
<u> </u>			05989	8	5/16"					
.E	<u> </u>	0	05990	10	13/32"					
🖔 DIAMOND DRILL BITS (Gres		arble	05991	12	1/2"	-			GRINDER	
		ğ Z	04910	20	3/4"					
		rani	57903	25	1"					
¥.		Tile, Ceramic tiles, Porcelain tiles, Granite, Marble	04911	28	1 1/8"					
	DRYGRES	ii iii	04912	35	13/8"	max.			ELECTRIC DRILL	
\sim		cela	04913	43	13/4"	14.000			Without percussion Use with adapter (Ref. 05976)	
	ä	, Pol	04914	50	2"		36	1 7/16"	ose with adapter (Ker. 03770)	
		= E	04915	60	2 3/18"				0	
		amic	04916	65	2 1/2"				d5	
		S.	04917	68	2 11/18"					
		Tie Tie	05992	75	3"				MULTIDRILL GUIDE /	
			57904	80	3 1/8"				MULTIDRILL PLUS RM	
			57906	85	3 3/8"					
			57907	100	3 15/16"					
		ν̈́	57908	120	4 3/4"					
		tile	05923	6	5/16"					
	≓	amic al St	05924	8						
	4DR	Cera atura ificia	05926	10	13/32"				ELECTRIC DRILL	
	S	nics, es, N	05927	12	9/16"	min. 1.000			Without percussion	
	DRYGRES 40RILL	Coating ceramics, Ceramic tiles, Porcelain tiles, Natural Stone Piedra Artificial	05928 05929	14 20	3/4"	1.300	40	1 9/16"		
	R	ng o elair Pi			1 1/8"	-	40	1 // 10	Without percussion and adapter	
		oatir	05970 05971	28 35	1 3/8"	-			(Ref. 04992)	
	111.10	O	04962	35	13/8"					
STEN	BID		04962	45	13/4"	-				
X TUNGSTEN	CARBIDE DRILL BITS	≝	04964	55	2 1/4"	max. 800	18	11/16"	ELECTRIC DRILL Without percussion and adapter	
\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	_		04968	85	3 1/4"				Without (Ref. 04992) percussion	
\times			04700	00	3.7.				percussion	





GRINDING & POLISHING

Grinding wheels and blades Blades and polishing pads





GRINDING WHEELS







CONCRETE DOUBLE ROW GRINDING CUP

- Grinding cup with double row of sintered segments for grinding and edge finishing on concrete surfaces.
- · Laser welding. Coarse grinding finish. Heavy-Duty steel core.
- · For GRINDERS use.
- Maximum perimeter speed: 15.300 RPM (Ref. 05917) and 12.250 RPM (Ref. 05918).

	REF.	\odot	\odot	<u> </u>		RPM	=
GRINDING CUP WHEEL CONCRETE DOUBLE ROW	05917	3 7/8"				15300 max	
0100	U3917	100 mm	7/8"	1/4"	3/4"	153UU max	1
GRINDING CUP WHEEL CONCRETE DOUBLE ROW	05918	4 7/8"	22,2 mm	6 mm	19 mm	177E0 may	1
0125	UJ710	125 mm				1225U max	





CONCRETE FAN GRINDING CUP

- Fan shaped grinding cup with sintered segments for fast grinding and edge finishing on concrete surfaces.
- · Laser welding. Coarse grinding finish. Heavy-Duty steel core.
- · For GRINDERS use.
- Maximum perimeter speed: 15.300 RPM (Ref. 05919) and 12.250 RPM (Ref. 05920)

	REF.	\odot	(···)			RPM	- H
GRINDING CUP WHEEL CONCRETE FAN CUP 0100	05919	3 7/8" 100 mm	7/8"	1/4"	7/8"	15300 max	1
GRINDING CUP WHEEL CONCRETE FAN CUP 0125	05920	4 7/8" 125 mm	22,2 mm	5 mm	23,5 mm	12250 max	1



CATEGORY: SUPERPRO	MATERIAL: NATURAL STONE	LONG LIFE

STONE GRINDING CUP

- Turbo sintered grinding cup for grinding and edge finishing on natural stone surfaces.
- · Laser welding. Coarse grinding finish. Heavy-Duty steel core.
- · For GRINDERS use.
- \cdot Maximum perimeter speed: 15.300 RPM (Ref. 05919) and 12.250 RPM (Ref. 05920)

	REF.	Q	(···)	 :		RPM	= 1
GRINDING CUP WHEEL TURBO STONE 0100	05001	3 7/8"	M14"	1/4"	3/4"	15300 may	1
UNINDING COP WHELE TORDO STONE 6100	U3921	100 mm	M14 mm	7 mm	19,5 mm	TOOUU IIIAX	1





EPOXY-FIBER GRINDING CUP

- \cdot PCD grinding cup for fast removal of epoxy, paint, acrylics or other elastic coatings.
- $\hbox{\bf \cdot} \ \, \text{High frequency welding. Heavy-Duty steel core. Medium grinding finish.}$
- For GRINDING use.
- · Maximum perimeter speed: 12.250 RPM

	REF.	\bigcirc		<u></u> :		RPM	
GRINDING CUP WHEEL EPOXY, FIBRE, PCD 0125	05922	47/8"	7/8"	1/8"	3/8"	12250 max	1
		123 111111	ZZ,Z 111111	2 mm	10,5 mm		



CUTTING & GRINDING BLADES





CATEGORY: SUPERPRO NO VI


NO VIBRATIONS

GOOD FINISH

CUTTING & GRINDING BLADES

- For cutting and grinding soft natural stone and ceramic tiles and synthetic materials.
- $\boldsymbol{\cdot}$ For adjustment cuts and grinding on all types of porcelain and hard materials.
- · Electroplated continuous rim blade.
- Two-sided and reversible blade for a better performance.
- For grinders use. Connection: M14 thread.

	REF.	Q	(\cdots)	(1)	٧	RPM	=
ECD 115 2IN1 SUPERPRO	31964	4 1/2"				13300 max.	
LCD 113 ZIN1 JUPERPRO	31704	115 mm	M14"	1/8"	1/4"	13300 11187.	
ECD 125 2IN1 SUPERPRO	31965	4 7/8"	M14 mm	1,8 mm	5,6 mm	12250 max.	1
ECD 123 ZIMI SUPERPRU	J1703	125 mm				TZZJŲ IIIdX.	

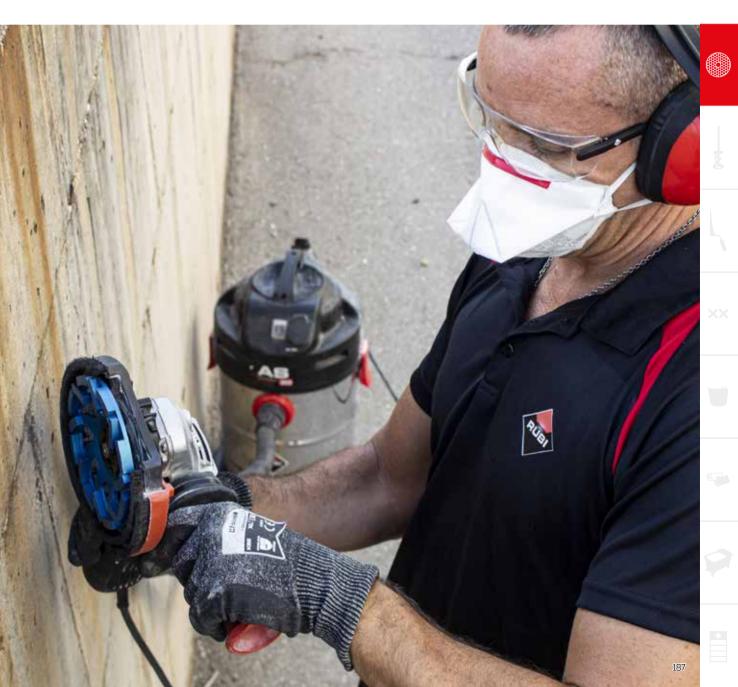



GRINDING CUTTERS







CATEGORY: SUPERPRO MATERIAL: PORCELAIN TILE QUALITY FINISH LONG LIFE LANDSCAPING

FULL BULLNOSE GRINDING BIT

- For full bullnose edge grinding on porcelain, natural stone and landscaping materials.
- These cutters can easily produce bevels on worktops, steps, swimming pool coping, tree surrounds, kerbs, etc.
- For use with a grinder with M14 fitting.
- Diamond fixed by means of a vacuum brazing process

	REF.	Q	RPM		*	<u> </u>
FULL BULL NOSE	52938	1" 50 mm	14000 max.	3/4" 20 mm	1.014116 lb 0,46 kg	1



CATEGORY: SUPERPRO	13	MATERIAL: PORCELAIN TILE	QUALITY Finish	LONG LIFE	LANDSCAPING

HALF BULLNOSE GRINDING BIT

- For half bullnose edge grinding on porcelain, natural stone and landscaping materials.
- These cutters can easily produce bevels on skirting, steps, worktops, swimming pool coping, etc.
- For use with a grinder with M14 fitting.
- Diamond fixed by means of a vacuum brazing process.

HALF BULL NOSE 52939 1" 14000 max 3/4" 0.970024 lb	1
14000 IIIax. 20 mm 0,44 kg	1





DIAMOND FLAP DISCS













CATEGORY: SUPERPRO	MATERIAL: PORCELAIN TILE	FAST	GOOD FINISH	LONG LIF

DIAMOND FLAP DISCS

- For grinding ceramic, porcelain, sintered stone and natural stone.
- Fast grinding with a long life due to the ratio of diamond concentration to diamond grit spacing.

- Ideal for edge and surface grinding.It comes with an aluminium M14 ADAPTER for use with the grinder to reduce vibrations and provide better stability during work.
- Dry and wet grinding.
- Very good finish.

	REF.	Ö	RPM	Ů	<u></u>
DIAMOND FLAP DISC 50/60 COARSE GRIT 0115	32921				
DIAMOND FLAP DISC 100/120 MEDIUM GRIT 0115	32927	4 1/2" 115 mm	10500	0.925932 lb 0,42 kg	
DIAMOND FLAP DISC 200 FINE GRIT 0115	32931				1
DIAMOND FLAP DISC 50/60 COARSE GRIT 0125	32937				
DIAMOND FLAP DISC 100/120 MEDIUM GRIT 0125	32938	4 7/8" 125 mm	9650		
DIAMOND FLAP DISC 200 FINE GRIT 0125	32939				



GRINDING BLADES





















































CATEGORY: PRO

MATERIAL: PORCELAIN TILE

GRINDING BLADES

- · VACUUM BRAZED embossed plate.
- · For edges and surfaces grinding of natural stone, all kind of ceramic tiles and paint or resin coatings.
- · For GRINDERS use.
- · Maximum recommended speed: 15,300 RPM.
- · Fine grinding finish.(Ref.31974)
- · Coarse grinding finish.(Ref.31979)

	REF.	Q		\odot		RPM	=
VDF 100 FINE PRO	31974	3 7/8"	7/8"	1/8" 2,1 mm	7/8"	15300 max	1
VDG 100 COARSE PRO	31979	100 mm	22,2 mm	1/8" 2,4 mm	23 mm	TOOUN IIIAX	1

BEVELLING WHEELS









CATEGORY: SUPERPRO



GOOD FINISH



- · Grinding wheel for bevelling.
- Diamond grits fixed by means of a vacuum brazing system.
- Recommended for use with ANGLE GRINDERS.
- Recommended use between 9,000 12,000 rpm to achieve greater durability of
- · Round finish available on 5 and 10 mm radius.
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-EDGER.

	REF.	\bigcirc	\odot	<u></u> :	RPM	
R.5 FINE GRAIN PRO-EDGER BEVELLING	16957	2 5/8"		1/4"		_
WHEEL	10737	66 mm	M16" M16 mm	6 mm	12000 max.	
R.10 FINE GRAIN PRO-EDGER BEVELLING	16958	2 "		3/8"		1
WHEEL	10730	76 mm		11 mm		1









CATEGORY: SUPERPRO

MATERIAL: PORCELAIN TILE

GOOD FINISH



- · Grinding wheel for mitring.
- Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS.
- Recommended use between 9,000 12,000 rpm to achieve greater durability of the wheel.
- · 45° type tool with 1-2 mm edge.
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-EDGER.

	REF.	\bigcirc	<u></u>	:	RPM	
45X20 FINE GRAIN PRO-EDGER MITRING	16946	3 3/4"		3/4"		
WHEEL	10740	94 mm	M16"	20 mm	12000 max.	_
45X15 FINE GRAIN PRO-EDGER MITRING	16985	3 1/4"	M16 mm	5/8"	12000 IIIdX.	٥
WHEEL	10700	84 mm		15 mm		





CATEGORY: SUPERPRO

MATERIAL: PORCELAIN TILE

FAST





- · Grinding wheel for mitring.
- · Diamond grits fixed by means of a vacuum brazing system.
- · Recommended for use with ANGLE GRINDERS.
- Recommended use between 9,000 12,000 rpm to achieve greater durability of the wheel.
- The TURBO TWIST model can be used for grinding before finishing with a fine grit, as its grooved design can chip the tile profile.
- · Internal diameter: 16.1 mm (M16 thread).
- · For exclusive use with PRO-EDGER.

	REF.	\odot	\bigcirc	 :	RPM	=
45X15 TURBO TWIST COARSE GRAIN PRO-EDGER	16984	3 1/4"	M16"	5/8"	13000 may	5
MITRING WHEEL	10704	84 mm	M16 mm	15 mm	12000 max.	















POLISHING PADS

















MATERIAL: NATURAL STONE

QUALITY FINISH

DRY POLISHING DIAMOND PADS

- \cdot Range of floppy discs Ø100 mm for polishing, dry, of concrete, marble, granite and other ornamental natural stones.
- It allows removing scratches and surface damage quickly and easily.
- · Maximum operating speed: 3,000 rpm.
- · Different granulometry.
- # 50, # 100 and # 200 for roughing.
- # 400, # 800, # 1500 and # 3000 polishing and close the pore.
- · VELCRO® fastening blade to holder ref. 62986.

	REF.	O	=	
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN # 50	62970			
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #100	62971			
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #200	62972			
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #400	62973	3 7/8" 100 mm	, -	1
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #800	62974			
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #1500	62975			
DIAMOND PADS DRY POLISHING 0100 MM - GRAIN #3000	62976			







CATEGORY: SUPERPRO

MATERIAL: NATURAL STONE

QUALITY FINISH

DRY DIAMOND POLISHING PAD BUFF BL.

- $\boldsymbol{\cdot}$ Ø100 mm floppy disc for the final buffing, dry, of concrete, marble, granite and other ornamental natural stones.
- · Get a natural and long-lasting shine
- · Maximum operating speed: 3,000 rpm.
- · VELCRO® fastening blade to holder ref. 62986.

	REF.	\odot	
DRY DIAMOND POLISHING PAD 0100 MM BUFF BL.	62977	100	1





CATEGORY: SUPERPRO

PAD SUPPORT FOR POLISHING AND BUFFING

- Fixing brackets for flexible polishing and buffing blades Ø100 mm.
- · Compatible with jobs dry and water-cooled.
- · VELCRO fastening.
- · Connection polisher / grinder with M14 thread.

	REF.	\bigcirc	
SUPPORT FLOPPY PAD 0100MM M14	62986	3 7/8" 100 mm	1



MANUAL POLISHING PADS











	CATEGORY: SUPERPRO	MATERIAL: PORCELAIN TILE	QUALITY FINISH	LONG LIFE
--	--------------------	--------------------------	-------------------	-----------

MANUAL POLISHING PADS

- · Range of diamond rubber pads for roughing and edge polishing, cutting and surfaces of natural stone and ceramic tile.
- · Semi-flexible. Good adaptation to the user's hand.
- Wet use is recommended.
- · Different grain sizes:
- # 60, # 120 and # 200 for roughing.
- # 400 for polishing.
- Dimensions of the diamond plate: 55x90 mm.
- Rubber pad dimensions: 58x94x30 mm.

	REF.	= 1
DIAMOND POLISHING PAD GRAIN # 60	61974	
DIAMOND POLISHING PAD GRAIN #120	61975	10
DIAMOND POLISHING PAD GRAIN #200	61976	10
DIAMOND POLISHING PAD GRAIN #400	61977	





MIXING

Electric mixers Mixing paddles



RUBIMIX E-10 ENERGY CAS

FREEDOM OF MOVEMENT.

For cementitious adhesives, resins, paints and other materials.













- · Brushless motor. Maintenance-free and increases the product's lifespan. Maximum efficiency.
- · Powered by a CAS Li-Ion 18V 5.2Ah battery pack, compatible with METABO cordless tools and all of those that form part of the CAS 18V platform.
- · Light and strong. Maximum reliability.
- · Dual bi-material grip handle. Better ergonomics, comfort and stability.
- Equipped with a 2-speed gearbox.
- $\boldsymbol{\cdot}$ Progressive switch (RPM control) to optimise the mixing of each material.
- Switch safety lock prevents unintentional start-up.
- $\boldsymbol{\cdot}$ LED battery-charge indicator.
- · Connection to mixing paddles with M14 thread and FAST-IN adapter (included).
- · Double-insulated motor.















	REF.		5	RPM		=					
RUBIMIX E-10 ENERGY CAS EU	26570				18.95956 lb 8,6 kg						
RUBIMIX E-10 ENERGY CAS UK	26571		18 V	1ª 0-420/ 2ª 0-700	18.95956 lb						
RUBIMIX E-10 ENERGY CAS USA	26572		v	v	v	v	10 V	1 0-420/ 2 0-700	8.6 kg	1	20
RUBIMIX E-10 ENERGY CAS NO BAT/CHARG.	27913										
BATTERY CASE LI-POWER 18V 5.2AH	85902		18V								

ACCESSORIES



Mixer Paddles FAST-IN 3HELIX



RUBIMIX-50 N

COMPATIBILITY


COMPATIBILITY	
RUBIMIX E-9 ENERGY CAS	18 V 5.2 Ah
RUBIMIX E-10 ENERGY CAS	18 V 5.2 Ah
ANGLE GRINDER TECH	18 V 5.2 Ah
RUBI LUMEO	18 V 5.2 Ah
QUAKE ENERGY CAS	18 V 2.0 Ah
RUBI TRILLER ENERGY CAS	12 V 4.0 Ah

RUBIMIX E-9 ENERGY CAS

LIGHT, RELIABLE & RESISTANT

Ideal for the mixing of cement adhesives, resins, paints, and other materials.



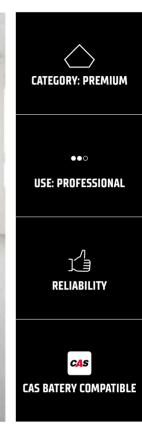







- · SAFETY AND MORE COMFORTABLE. Equipped with a safety lock to avoid involuntary startup and a soft start device to control the acceleration of the paddle.
- · ELECTRONIC RPM REGULATOR. Accurate control of the rpm with the 5 positions dial.
- · CAS PLATFORM TECHNOLOGY. Li-Power 18V 5,2 Ah CAS battery. Portability and manageability, free of cables.
- BRUSLESS MOTOR. High efficiency with increased battery performance. Less maintenance.
- Double handled with bi-material handles. Improves ergonomics, comfort and stability.
- LED indicator of battery charge level.
- 5.2Ah battery, at 100%, allows user to mix 3 bags of 25kg of tile adhesive. Not recommended to mix more than 25kg in once.
- · Double insulation of the motor.
- IP20 protection.
- Maximum mixing paddle's head diameter: 120 mm
- Equipped with FAST-IN adapter, also allows to use mixing paddle rods with M14 thread.
- · Includes a M120 FAST-IN detachable paddle.
- · Includes transport case and tools to remove the FAST-IN adapter and to use M14 mixing paddles.











18V



	REF.		5	RPM	ightharpoons		
RUBIMIX E-9 ENERGY CAS EU	61993		18 18 V	1° 0-700		1	
RUBIMIX E-9 ENERGY CAS UK	61994				11.023 lb		
RUBIMIX E-9 ENERGY CAS USA	61995	V			5 kg		-
RUBIMIX-E9 ENERGY CAS NO BAT/CHARG.	61996						
BATTERY CASE LI-POWER 18V 5.2AH	85902		18V				

 ${}^{\star}\mathsf{The}$ pictures of this product might be slightly different to its final version.

ACCESSORIES	



Mixer Paddles FAST-IN 3HELIX



Mortar mixer paddle Thread M14 3 HELIX



RUBIMIX-50 N

COMPATIBILITY

RUBIMIX E-9 ENERGY CAS 18 V 5.2 Ah
RUBIMIX E-10 ENERGY CAS 18 V 5.2 Ah
ANGLE GRINDER TECH 18 V 5.2 Ah
RUBI LUMEO 18 V 5.2 Ah
QUAKE ENERGY CAS 18 V 2.0 Ah
RUBI TRILLER ENERGY CAS 12 V 4.0 Ah

RUBIMIX-9 POWER MAX

POWERFUL MULTIPURPOSE ELECTRIC MIXER, SUITABLE FOR CEMENTITIOUS ADHESIVES, RESINS, PAINT, AND OTHER MATERIALS. Facilitates a homogeneous mixing of materials, avoiding the formation of bubbles and/or lumps.



















- \cdot Electronic speed controller (rpm regulation) to optimise the mixing of each material.
- · Equipped with 2 speeds gearbox (490/880 rpm).
- · Mixing paddles connection through exclusive RUBI FAST-IN head for fast paddle change.
- · Greater electrical safety thanks to double isolation.
- · Easy and intuitive use.
- $\boldsymbol{\cdot}$ Attractive and functional design.
- Ergonomic bi-material handle with improved grip that provides greater. Comfort & stability.
- · Chassis in technical plastic, light & resistant.
- · Maximum reliability & durability.
- · Anti-ignition security system. Prevents inadvertent start-up.
- · Soft start system.
- Ø140mm triple helix mixing paddle included (M14 thread continuous full rod) for mortar and cementitious adhesives.
- Direct access to engine brushes for a fast and easy maintenance. Spare brushes and 19 & 22 mm keys included.
- · Available version with carrying case (ref.26981).
- · Compatible with drill holder and RUBI mixing paddles range.













































	REF.		W	5	Ů	=	
RUBIMIX-9 POWER MAX	26980	-	2100		16.5345 lb 7,5 kg		
RUBIMIX-9 POWER MAX + CASE	26981	√	2100 W	230V/50-60Hz	25.57336 lb 11,6 kg	2	12

ACCESSORIES



Mixer Paddles FAST-IN 3HELIX



RUBIMIX-50 N






RUBIMIX-9 SUPERTORQUE

VERSATILE ELECTRIC MIXER, SUITABLE FOR CEMENTITIOUS ADHESIVES, RESINS, PAINTS AND OTHER MATERIALS.

Facilitates homogeneous mixing of the materials and prevents the creation of bubbles and/or lumps.



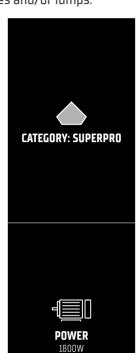











- · Electric mixer with high torque.
- · Electronic speed controller (rpm control) to OPTIMISE the mixing of each material.
- · Equipped with a mechanical 2 SPEED gearbox (450/780 rpm).
- · Better electrical SAFETY thanks to its double insulation.
- · ATTRACTIVE and FUNCTIONAL Design.
- · Connection to mixing paddles with M14 thread.
- Double handle with bi-material grip providing better ERGONOMICS, COMFORT and STABILITY.
- Chassis in TECHNICAL, LIGHT, and STRONG plastic. Maximum RELIABILITY AND DURABILITY.
- SAFETY on button. Prevents unintentional start-up.
- · Smooth start system.
- Direct access to the motor's brush housing for quick and easy maintenance.
- \cdot Includes mixing paddle with 3 helixes of 140 mm diameter for mortars and cementitious adhesives.
- Option to couple a RUBI FAST-IN adapter for paddles (NOT included).
- Includes brushes and 19 and 22 mm spanners.
- · Version available with transport case (ref. 26974).
- · Compatible with chucks and range of mixing paddles RUBI.



	REF.		W	5	RPM	Ů	=	
RUBIMIX-9 SUPERTORQUE	26970		230V-50/60Hz.				12	
RUBIMIX-9 SUPERTORQUE UK	26971		1800 1800 W	110V-50/60Hz.	1° 0-450 / 2° 0-780	11.24346 lb	11.24346 lb 5,1 kg	
	26972	_		220V-50/60Hz.		5,1 kg 19.51071 lb 8,85 kg 11.24346 lb 5,1 kg		-
RUBIMIX-9 SUPERTORQUE USA + CHUCK	26973			120V-50/60Hz.			2	12
RUBIMIX-9 SUPERTORQUE + CASE	26974	√		2704 50 404				
RUBIMIX-9 SUPERTORQUE + CHUCK	26975	-		230V-50/60Hz.				-

ACCESSORIES



Mortar Mixer M14 Thread 3 ZN-Zinc plated HELIX



Mixer Paddles FAST-IN 3HELIX



RUBIMIX-50 N





RUBIMIX-16 ERGOMAX

INNOVATIVE AND ERGONOMIC

For cementitious adhesives, resins, paints and other materials.













- \cdot Handle adjustable in height. Ergonomics adaptable to each user.
- · Powerful 1600W motor for greater mixing capacity and high reliability.
- · New and improved handle. Comfort and stability.
- \cdot Quick Connect System FAST-IN. Change rod without tools.
- · Electric mixer mortar powerful 1600 W.
- · Double insulation.
- \cdot Gearbox with 2 speeds (1st O-430 rpm / 2nd O-570 rpm).
- · Electronic speed controller (R.P.M. regulation).
- \cdot Ø maximum of mixer 160 mm. Mixer paddle Ø 140 mm. FAST-IN (5 9/16 ") included.
- Thread Direct link for mixers with M14 finish. Weight: 4.6 kg. Electrical cable: 3 m.

	REF.		W	5	Å		
RUBIMIX-16 ERGOMAX 230V 50/60HZ	24994			230V 50-60Hz.			24
RUBIMIX-16 ERGOMAX 110V 50/60HZ UK	24995	-	1600	110V 50-60Hz.	10.14116 lb	ח	18
RUBIMIX-16 ERGOMAX 230V 50/60HZ UK	24996		1600 W	270//50 /01/	4,6 kg	2	10
RUBIMIX-16 ERGOMAX 230V 50/60HZ W/CASE	24998	V		230V 50-60Hz.			24



RUBIMIX-8 EASY PRO

MULTI-MATERIAL ELECTRIC MIXER, SUITABLE FOR CEMENTITIOUS ADHESIVES, **RESINS. PAINT, AND OTHER MATERIALS.** Facilitates a homogeneous mixing of materials, avoiding the formation of bubbles and/or lumps.











- · 1400 W Electric Motor.
- · Mixing paddles connection through M14 thread.
- · Greater electrical SAFETY thanks to double isolation.
- · EASY and INTUITIVE use. ATTRACTIVE and FUNCTIONAL design.
- · Ergonomic bi-material handle with improved grip that provides greater comfort & stability.
- · Chassis in technical plastic, light & resistant. maximum reliability & durability.
- · Anti-ignition security system. Prevents inadvertent start-up.
- · Includes Ø4" 3/4 (Ø120 mm) red triple helix split mixing paddle (M14 thread continuous full rod) for mortar and cementitious adhesives.
- $\boldsymbol{\cdot}$ Direct access to engines brushes for a fast and easy maintenance.
- \cdot Spare brushes and 3/4"& 7/8" (19 & 22 mm) keys included.
- · Compatible with drill holder and RUBI mixing paddles range.

	REF.		W	5	RPM	$^{\circ}$		-	
RUBIMIX-8 EASY PRO EU	16903	No 1400 230'	230V-50/60Hz.	0-700 0-700 RPM	10.714356 lb 4.86 kg			32	
RUBIMIX-8 EASY PRO UK	16905		1/00	220V-50-60Hz.	18.0. 700	10.427758 lb	12.67645 lb 5.75 kg	2	24
RUBIMIX-8 EASY PRO USA	16906	_	1400	120V-50-60Hz.	1ª 0-700	4.73 kg			18



Mortar Mixer M14 Thread 3 ZN-Zinc plated HELIX



Mortar mixer paddle Thread M14 3 HFLIX




RUBIMIX-9 N

VERSATILITY BY CHANGING THE MIXING PADDLE.

For cementitious adhesives, resins, paints and other materials.



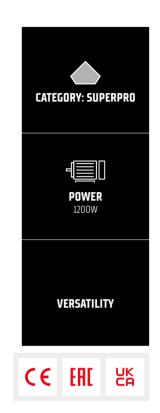



- · 2 speed gearbox and electronic controller to optimise the mixing of each material.
- · Interchangeable mixing paddle with M14 connection. Greater versatility.
- · Made of lightweight and durable materials for maximum reliability.
- Power: 1200 W.
- · Double insulation.
- · Direct connection M14 thread.
- Electronic regulator (1st 0-650 r.p.m. / 2nd 0-850 r.p.m.). Ø maximum paddle: 5" 1/2 (140 mm).
- Ø 4 3/4" (120 mm.) mixing paddle included.

	REF.		W	5	RPM	ightharpoons	-	
RUBIMIX-9 N	25940			210-240V 50-60 Hz.			- 2	
	25942		1200 1200 W	110-130V 50-60 Hz.		12.1253 lb 5,5 kg		
RUBIMIX-9 N UK	25944	-		210-240V 50-60 Hz.	18.0 /50 /28.0 050			24
RUBIMIX-9 N + CHUCK	24986				1ª 0-650 / 2ª 0-850	12.34576 lb		
RUBIMIX-9 N USA + CHUCK	24949			110-130V 50-60 Hz.		5,6 kg		
RUBIMIX-9 N + CASE	24958	V		210-240V 50-60 Hz.		17.19588 lb 7,8 kg		18





MIXING PADDLES FAST-IN



FHST





FAST-IN PADDLE ADAPTER

- · Adapter for use of the FAST-IN rods.
- Transform the threaded connection M14x2 quick-connect system FAST-IN.
- · Adaptable to any mixer with M14x2 thread.

	REF.	=
FAST-IN ADAPTER	76907	1







TILE ADHESIVE

FAST-IN CONNECTION

MIXER PADDLES FAST-IN 3HELIX

- To mix cement mortars.
- Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- · Less effort in mixing.
- · Less vibrations. Greater comfort.
- · Fast connection without tools FAST-IN.
- Compatible with RUBIMIX E-10 ENERGY CAS, RUBIMIX-9 POWER MAX, RUBIMIX-16 ERGOMAX or FAST-IN (Ref. 76907) Adaptable to any mixer with M14x2 connection.

	REF.		\$	<u> </u>	[-A]	
MIXER PADDLE M-120-FI 3H	76942	33.069-55.115 lb		4 3/4"		_
MIXER PAUDLE M-120-FI 3H	/0742	15-25 kg	23 5/8"	120 mm	٦ .	_
MIXER PADDLE M-140-FI 3H	76943	55.115-88.184 lb	600 mm	5 1/2"		84
MIXER PAUDLE M-14U-FI 3H	/6945	25-40 kg		140 mm		04





MIXING PADDLES

· ADAPTABLE TO RUBI MIXERS AND OTHER BRANDS.





CATEGORY: PRO	TILE ADHESIVE	NON OXIDABLE

MORTAR MIXER M14 THREAD 3 ZN-ZINC PLATED HELIX

- · For mixing cement-based mortars.
- · Mixing paddle with zinc treatment.
- Paddle head with 3 blades for more efficient mixing. 15% performance improvement compared to heads with two blades.
- Reduces the effort for the electric mixer during the mixing process.
- Generates less vibration. Increased comfort.
- · Connection by M14 x 2 thread.
- Can be adapted directly to RUBIMIX range and other brands.

	REF.		g .	<u>\$</u>	
MORTAR MIXER PADDLE M-120-R 3H ZN	76971	33.069-55.115 lb	23 5/8"		
MURIAR MIXER PAUDLE M-12U-R 3H ZN	/09/1	15-25 kg	600 mm	4 3/4"	
MORTAR MIXER PADDLE M-120-R 3H LONG ZN	7/077	55.115-88.184 lb	29 7/8"	120 mm	6
MURIAR MIXER PAUDLE M-120-R 3H LUNG ZN	76972	25-40 kg	760 mm		
MORTAR MIXER PADDLE M-140-R 3H ZN	76973	66.138-132.276 lb	23 5/8"	5 1/2"	٦
MORIAR MINER PADDLE M-140-R 30 ZN	/07/3	30-60 kg	600 mm	140 mm	





PLASTER MIXER PADDLE THREAD M-14

- For mixing between 33.1 66.1 Lb. (15 25 kg.) of plaster.
- M14 x 2 thread connection.
- · Adaptable directly to RUBIMIX range and other brands.

	REF.		<u>}</u>	<u>\$</u>		
PLASTER MIXER PADDLE P-120-R	72054	33.069-66.138 lb	23 5/8"	4 3/8"	,	
	72954	15-30 kg	600 mm	110 mm	2	



CATEGORY PRO TILE ADRESIVE USE WITH DRILLS	CATEGORY: PRO	TILE ADHESIVE	USE WITH DRILLS
--	---------------	---------------	-----------------

MORTAR MIXER 3 HELIX

- · To mix cement mortars.
- · Helix head with 3 blades for higher efficient mixing.
- · Adaptable to RUBIMIX range by chuck (Ref. 71967).

	REF.		1	<u>k</u>	<u></u>
MORTAR MIXER M-80 3H	76945	22.046-33.069 lb	15 3/4"	3 1/8"	
MURIAR MIXER M-00 3H	/0743	10-15 kg	400 mm	80 mm	,
MORTAR MIXER M-100 3H	76946	33.069-44.092 lb	21 5/8"	3 7/8"	6
MURIAR MIXER M-100 3H	/0740	15-20 kg	550 mm	100 mm	







HIGHER PERFORMANCE

USE WITH DRILLS



MORTAR MIXER PADDLE THREAD M14 3 HELIX

- · To mix cement mortars.
- Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- · Less effort in mixing.
- · Less vibrations. Greater comfort.
- M14 x 2 thread connection.
- · Adaptable directly to RUBIMIX range and other brands.

	REF.		§	<u>\$</u>		
MORTAR MIXER PADDLE M-100-R 3H	76917	33.069-44.092 lb	21 5/8"	3 7/8"	,	
MURIAR MIXER PAUDLE M-100-R 3H	/071/	15-20 kg	550 mm	100 mm	6	
MORTAR MIXER PADDLE M-120-R 3H	76918	33.069-55.115 lb		4 3/4"		
MORIAR MIXER PADDLE M-120-R 3H	/0710	15-25 kg		120 mm		
MORTAR MIXER PADDLE M-140-R 3H	76919	55.115-88.184 lb	23 5/8"	5 1/2"	,	
MORIAR MIXER PADDLE M-140-R 3H	/0717	25-40 kg	600 mm	140 mm		
MORTAR MIXER PADDLE M-160-R 3H	76940	66.138-132.276 lb		6 1/4"		
MOKIAK MINEK PADDLE M-100-K 3H	/0740	30-60 kg		160 mm		





EPOXY MIXER PADDLE E-80

- · Special mixing between 2.2 4.4 Lb. (1 2 kg) of epoxy resins.
- · 8 mm hexagonal finish.
- · Adaptable to RUBIMIX range by chuck (Ref. 71967).

	REF.		\$	1	<u>_</u>
EPOXY MIXER PADDLE E-80	65939	2.2046-11.023 lb	15 3/4"	3 1/8"	4
	65939	1-5 kg	400 mm	80 mm	
-					



CATEGURY: PRO LIQUIDS USE WITH DRILES	CATEGORY: PRO	LIQUIDS	USE WITH DRILLS
---------------------------------------	---------------	---------	-----------------

LIQUID MIXER PADDLE - HEXAGONAL ROD

• To mix liquid and low density materials.

· Adaptable to RUBIMIX range by chuck (Ref. 71967).

	REF.		<u>}</u>	<u> </u>		
LIQUID MIVED DADDLE L.OO	/ 5077	11.023-33.069 lb	15 3/4"	3 1/8"		4/7
LIQUID MIXER PADDLE L-80	65933	5-15 kg	400 mm	80 mm	,	462
LIQUID MIVED DARRIE L. 100	65934	33.069-55.115 lb	21 5/8"	3 7/8"	0	
LIQUID MIXER PADDLE L-100	03734	15-25 kg	550 mm	100 mm		







RUBIMIX-50 N

- · With double thermal protection device.
- Blade speed: 60 r.p.m.
- For mixing up to 110 Lb. (50 kg.) of mortar (adhesive, facing cement, etc.)
- Integrated gearbox design for better performance in the transmission.
- Compact and easy to transport.



CATEGORY: SUPERPRO

CHUCK



- Chuck attachable to the entire RUBIMIX range to work with hexagonal and round finishing rods below 12mm.
- · Includes chuck key S2 Ref. 71969.

	REF.	=
СНИСК	71967	1

UPWARDS MOTION: The material rises through the inner section of the mixing paddle and falls on the outside. This motion allows for a homogeneous mixture of viscous materials such as mortar, cement, glue, etc. Less effort and easier use.	M-120-R 3H ZN M-120-R 3H L ZN M-140-R 3H ZN M-80 3H M-100 3H	M-100-R 3H M-120-R 3H M-140-R 3H M-160-R 3H M-120-FI 3H M-140-FI 3H
PARALLEL MOTION: The mixture is done horizontally so the materials flow in both directions (up/down) depending on the movement of the paddle. This motion is recommended for resins, bicomponents, liquids, etc. It reduces the amount of bubbles and lumps.	E-80 P-120-R	
DOWNWARD MOTION: The material is pulled through the paddle's head and rises through the exterior. This motion is recommended for materials with a low viscosity such as paint, sealers, plaster, etc The lumps are dissolved without splashing.	L-80 L-100	
COUNTER MOTION: Both paddles work simultaneously generating a more intense mixture. Recommended for resilient and viscous materials such as mortars. Only for dual- paddle mixers.	M-120 DUPLEX	



MIXING PADDLES

	REF		KG KG	LB	RPM X	w	MW XX	[⊠ INCH	<u>₩</u> MM	INCH	₩	MM/IN	ICH	
M-120-R 3H ZN	76971		15-25	33.1-55.1	000 =00	950	600	23 5/8"	400	4 2 / 4"				
M-120-R 3H L ZN	76972		25-40	55.1-88.2	300-500	950	760	29 15/16"	120	4 3/4"	(//////)	M14	1 x 2	
M-140-R 3H ZN			30-60	66.1-132.3	200-400	1200	600	23 5/8"	140	5 9/16"				
M-80 3H			10-15	22-33.1		500	400	15 3/4"	80	3 3/16"		8	5/16"	
M-100 3H								44.6.0				10	13/32	
M-100 R 3H		0	15-20	33.1-44.1	300-500	700	550	21 11/16"	100	4"				
M-120 R 3H			15-25	33.1-55.1		950		23 5/8"	120	4 3/4"	cmmn			
M-140 R 3H			25-40	55.1-88.2	200-400	1200	600		140	5 9/16"	(((((())))	M14 :	1 x 2	
M-160 R 3H			30-60	66.1-132.3		1500			160	6 5/16"				
M-120 FI 3H	76942		15-25	33.1-55.1	300-500	950			120 4 3/4"		EAST-IN			
M-140 FI 3H	76943		25-40	55.1-88.2	200-400	1200	600	23 5/8"	140			FAS	FAST-IN	
E-80		0	1-5	2.2-11	300-500	700	400	15 3/4"	80	3 3/16"				
L-80			5-15	11-33.1		400	400	15 3/4"	80	3 3/16"		8	5/16"	
L-100		0	15-25	33.1-55.1	300-600	500	550	21 11/16"	100	4"		10	13/32	
P-120 R	72954	0	15-30	33.1-66.1	300-500	950	600	23 5/8"	110	4 5/16"		M14 x2		



TOOLS FOR FIXING TILES AND FINISHINGS

Trowels, notched trowels, floats, rubber trowels and spatulas Markers, chisels, templates and auxiliary tools for tiling Mallets, Nippers and Grout Mortar Applicators





SELECTION TABLE

	ADHESIVE MORTAR O PUTTY			
			3 X 3 MM 1/8" X 1/8"	
≤ 10 X 10 CM ≤ 4"X 4"		.nn.	4,5 X 4,5 MM 3/16" X 3/16"	
		^	3 X 3 MM 1/8" X 1/8"	
		ıııı	6 X 6 MM 1/4" X 1/4"	
FROM 10 X 10 TO 20X20 CM FROM 4" X 4" TO 8" X 8"			6 X 5 MM 1/4" X 7/32"	
			6 X 6 MM 1/4" X 1/4"	
FROM 20 X 20 TO 30 X 30 CM FROM 8" X 8" TO 12" X 12"		ıııı	8 X 8 MM 3/8" X 3/8"	
FROM 20 X 20 TO 40 X 40 CM FROM 8" X 8" TO 16" X 16"		-^^^	R10 R13/32"	
FROM 30 X 30 TO 40 X 40 CM			6 X 10 MM 1/4" X 13/32"	
FROM 12" X 12" TO 16" X 16"			10 X 10 MM 13/32" X 13/32"	
* FROM 40 X 40 TO 60 X 60 CM * FROM 16" X 16" TO 24" X 24"		ıııı	12 X 12 MM 1/2" X 1/2"	
* FROM 60 X 60 TO 80 X 80CM * FROM 24" X 24" TO 32" X 32"			15 X 15 MM 9/16" X 9/16"	
*>80 X 80 CM" *>32" X 32"			20 X 20 MM 13/16" X 13/16"	
*>60 X 60 CM *>24" X 24"		M		

ADHESIVE MORTAR PUTTY

Basic conditions

>80% Adhesive coverage [dry indoor surfaces].
Final layer thickness. 5 mm [3/16"].
BACK BUTTERING is not required.

*Back buttering is mandatory when the required coverage is 2-95% [for outdoors or damp areas] or pieces larger than 40 x 40. [16"x16"].

To compensate for the bowing of the tile, add 2x** to the tooth size [** = deformation in the flatness of the tiles].



TROWELS AND NOTCHED TROWELS

		WOODEN HANDLE RUBIFLEX								PLASTIC	HANDLE				
						⊃_	B	<u> </u>	57		ľ./	ì <u> </u>			عد
			INOX			INOX			INOX		INOX		45°		
		65950	65960		65988	72915		75950	75970		72919			65951	25900
			74948												
		65989					71923			72906	74936				25901
										74980	74937				25902
		65982			65958		71924	75955		72907	74938		75946	65966	25903
				66968								66972			
		65984			65959		71925	75957		72908	74940		75947	65967	25905
5				66969								66973			
		65985			65983		71926	75958		72909	74941		75948	65968	25906
				66970								66974			
		74947			73973			75959		74982	74942		75923		25907
											76947				
					75962										
										72910			75924		
S Contraction of the second of										77923					
										www.					Andread Andread State St
CLOSED HANDLE		SED E 48cm/ 9"	OPEN HA	ANDLE	SPATULA	TI	ROWEL	SHARP E	EDGES	SQUARE	TRIA	ANGULAR	ROUN	ND .	YW
STEEL	INOX	NOX	W	EEBER											



TROWELS AND NOTCHED TROWELS



CATEGORY: PREMIUM

CLOSED HANDLE

WOODEN





CLOSED WOODEN HANDLE TECH-FLEX NOTCHED TROWELS

- · Closed Wooden handle for ergonomics.
- · The curved and toothed plate is made of rubber for lightness and safety because it does not cut like metal films.
- The curved shape of the plate is comfort engineered because it reduces operator effort and reduces adhesive loss during application.

	REF.	Lr.r.		=
CLOSED WOODEN HANDLE TECH-FLEX NOTCHED	66968	1/4"	3/8"	
TROWELS (6X8)		6 mm	8 mm	
CLOSED WOODEN HANDLE TECH-FLEX NOTCHED	66969	3/8"	3/8"	
TROWELS (8X10)		8 mm	10 mm	-
CLOSED WOODEN HANDLE TECH-FLEX NOTCHED	66970	3/8"	1/2"	
TROWELS (10X12)		10 mm	12 mm	

OPEN HANDLE	RUBIFLEX	
N		
E		

TECH-FLEX NOTCHED TROWELS

- \cdot Open RUBIFLEX handle for ergonomics.
- The trowel can be left resting on the edge of the carrycot.
- The curved and toothed plate is made of rubber for lightness and safety because it does not cut like metal films.
- The curved shape of the plate is comfort engineered because it reduces operator effort and reduces adhesive loss during application.

	REF.	டு		
TECH-FLEX NOTCHED TROWELS (6X8)	66972	1/4"	3/8"	-
		6 mm	8 mm	
TECH-FLEX NOTCHED TROWELS (8X10)	66973	3/8"	3/8"	1
		8 mm	10 mm	
TECH-FLEX NOTCHED TROWELS (10X12)	66974	3/8"	1/2"	
		10 mm	12 mm	









TROWELS & NOTCHED TROWELS CLOSED WOOD HANDLE

- Steel plate special high wear resistance with corrosion protection by clear coat. (STEEL).
- · Stainless steel plate special high wear resistance (INOX).

	REF.	டு			=	
STEEL TROWEL 12" (30 CM.)	65950					624
INOX TROWEL 12" (30 CM.)	65960	-" - mm	-" - mm			480
SHARP EDGED INOX TROWEL 12" (30 CM.)	74948					-
STEEL NOTCHED TROWEL 11" (28 CM.) 1/8 X	65989	1/8"	1/8" 1/8"	-" - mm	6	
1/8"(3 X 3 MM.)	03707	3 mm	3 mm			
STEEL NOTCHED TROWEL 11" (28 CM.) 1/4 X 1/4"	65982	1/4"	1/4"			
(6 X 6 MM.)	03702	6 mm	6 mm			/ 7/
STEEL NOTCHED TROWEL 11" (28 CM.) 3/8 X 3/8"	65984	3/8"	3/8"			624
[8 X 8 MM.]	03784	8 mm	8 mm			
STEEL NOTCHED TROWEL 11" (28 CM.) 13/32 X	/ F00F	3/8"	3/8"			
13/32" (10 X 10 MM.)	65985	10 mm	10 mm			
STEEL NOTCHED TROWEL 11" (28 CM.) 1/2" X 1/2"	74947	1/2"	1/2"			
(12 X 12 MM.)	/474/	12 mm	12 mm			-


▲ CATEGORY: PRO	WOODEN	
	and the second	

SPATULAS & NOTCHED SPATULAS WOOD HANDLE

 \cdot 7"(18 cm) wide plate. Special steel high wear resistance.

	REF.	ГГД		=	
STEEL NOTCHED SPATULA 7" (18 CM.)	71923	1/8"	1/8"		
1/8"X1/8"(3X3 MM.)	/1925	3 mm	3 mm		
STEEL NOTCHED SPATULA 7" (18 CM.) 1/4"X1/4"	71974	1/4"	1/4"	13	7/5/
(6X6 MM.)	/1924	6 mm	6 mm		
STEEL NOTCHED SPATULA 7" (18 CM.)	71925	3/8"	3/8"	12	3456
5/16"X5/16"(8X8 MM.)	/1925	8 mm	8 mm		
STEEL NOTCHED SPATULA 7" (18 CM.)	7107/	3/8"	3/8"		
3/8"X3/8"(10X10 MM.)	71926	10 mm	10 mm		



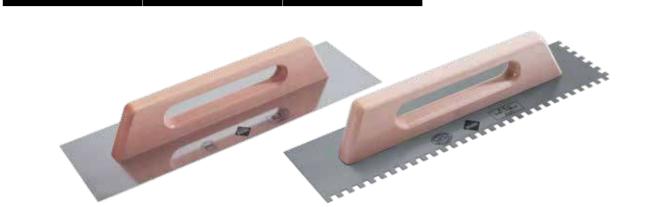

WOODEN

19"(48CM) TROWELS & NOTCHED T. CLOSED WOOD HANDLE

• Steel plate special high wear resistance, corrosion-protected by clear coat (STEEL).

CLOSED HANDLE

- · Stainless steel plate special high wear resistance (INOX)
- · Perfect flatness of the plate.

CATEGORY: SUPERPRO

• The notches 13/16" x 13/16" (20 x 20 mm.) developed for dosing of glue mortar on uneven floors. Allows more material thickness.

	REF.	ĽÜ			-	
STEEL TROWEL 19" (48 CM.)	65988	_"	_*			
INOX TROWEL 19" (48 CM.)	72915	- mm	- mm			
STEEL NOTCHED TROWEL 19" (48 CM.) 1/4"	/5050	1/4"	1/4"			
X 1/4" (6 X 6 MM.)	65958	6 mm	6 mm			
STEEL NOTCHED TROWEL 19" (48 CM.) 3/8"	65959	3/8"	3/8"	_"	6	360
X 3/8" (8 X 8 MM.)	0.17.17	8 mm	8 mm	- mm	0	200
STEEL NOTCHED TROWEL 19" (48 CM.)	65983	3/8"	3/8"			
13/32" X 13/32" (10 X 10 MM.)	0.3703	10 mm	10 mm			
STEEL NOTCHED TROWEL 19" (48 CM.) 1/2"	73973	1/2"	1/2"			
X 1/2" (12 X 12 MM.)	13713	12 mm	12 mm			
STEEL NOTCHED TROWEL 19" (48 CM.)	75962	3/4"	3/4"			
13/16" X 13/16" (20 X 20 MM.)	17407	20 mm	20 mm			

CATEGORY: SUPERPRO



LEVELLING TROWELS

- · Levelling trowels wood handle.
- · Special high wear resistant steel plate.
- Plate measures:15 3/4"x4 11/32"(40 x 11 cm).

	REF.	=	
LEVELLING TROWEL POINTED TIP	60997	2	288



TROWELS & NOTCHED T. CLOSED RUBIFLEX HANDLE

- · Steel plate special high wear resistance with corrosion protection by clear coat (STEEL).
- · Stainless steel plate high wear resistance (INOX).
- · Ergonomic RUBIFLEX handle with two textures.
- · Perfect flatness of the plate.

	REF.	гů			=	
STEEL TROWEL-12" (30 CM.)	75950	-"	-"			
INOX TROWEL 12" (30 CM.)	75970	- mm	- mm			-
STEEL NOTCHED TROWEL 11" (28 CM.) 1/4"X1/4" (6X6 MM.)	75955	1/4" 6 mm	1/4" 6 mm	_"	,	
STEEL NOTCHED TROWEL 11" (28CM) 3/8"X3/8" (8X8 MM.)	75957	3/8" 8 mm	3/8" 8 mm	- mm	6	624
STEEL NOTCHED TROWEL 11" (28CM) 1/2"X1/2" (10X10 MM.)	75958	3/8" 10 mm	3/8" 10 mm			
STEEL NOTCHED TROWEL 11" (28 CM.) 1/2"X1/2" (12X12 MM.)	75959	1/2" 12 mm	1/2" 12 mm			264



45° NOTCHED TROWEL RUBIFLEX OPEN HANDLE

- 45° Angled notches for comfort and less user effort.
- Improves adherence of the mortar on to work surface.
- $\boldsymbol{\cdot}$ Special carbon steel alloy plate of high wear resistance.
- Extremely light, high resistance aluminium reinforcement.
- · Highly rigid joint between the reinforcement and the plate.
- Ergonomic RUBIFLEX handle with two textures.
- · Clear coat for protection against corrosion.
- · Perfect flatness of the plate.

	REF.	ГГГ			=	
45° NOTCHED TROWEL 11" (28 CM) 1/4"X1/4"	75946	1/4"	1/4"			
(6X6)	/3940	6 mm	6 mm			
45° NOTCHED TROWEL 11" (28 CM) 3/8"X3/8"	75947	3/8"	3/8"			
(8X8)	/394/	8 mm	8 mm	-"		
45° NOTCHED TROWEL 11" (28 CM)	75948	3/8"	3/8"	- mm	,	480
13/32"X13/32" (10X10)	/3948	10 mm	10 mm		0	480
45° NOTCHED TROWEL 11" (28 CM) 1/2"X1/2"	75923	1/2"	1/2"			
(12X12)	/3923	12 mm	12 mm			
45° NOTCHED TROWEL 11" (28 CM) R-13/32"	75924	-"	-"	3/8"		
(10 MM.)	73924	- mm	- mm	10 mm		



▲ CATEGORY: SUPERPRO OPEN HANDLE RUBIFLEX



TROWELS & NOTCHED TROWELS OPEN RUBIFLEX HANDLE

- Extremely light and resistant aluminium core.
- The connection between core and plate is very rigid.
- · Highly wear-resistant special steel sheet with protection against corrosion by means of colourless varnish (STEEL).
- · Special stainless steel sheet with high wear resistance (SS).
- · RUBIFLEX ergonomic handle with two textures.
- · Perfect blade flatness.
- YW notched trowel (Ref.77923), with a distinctive and unique shape of notches (not rectangular) to achieve optimal wetting (near 100%) of the tile with the adhesive. Specially created for tiles for which wetting is key (large tiles),
- and works very well with large format and SLAB type tiles.

	REF.	ГГ			=					
INOX TROWEL 11" (28 CM.)	72919	-" - mm	-" - mm							
STEEL NOTCHED TROWEL 1/8"X1/8" (3X3 MM.)	72906	1/8"	1/8"							
INOX NOTCHED TROWEL 11" (28 CM.) 1/8"X1/8" (3X3 MM.)	74936	3 mm	3 mm							
STEEL NOTCHED TROWEL 11" (28 CM.) 3/16"X3/16" (4.5X4.5 MM.)	74980	1/8"	1/8"							
INOX NOTCHED TROWEL 11" (28 CM.) 3/16"X3/16" (4.5X4.5 MM.)	74937	4,5 mm	4,5 mm							
STEEL NOTCHED TROWEL 11" (28 CM.) 1/4"X1/4" (6X6 MM.)	72907	1/4"	1/4"			270				
INOX NOTCHED TROWEL 11" (28 CM.) 1/4"X1/4" (6X6 MM.)	74938	6 mm	6 mm	-" - mm						
STEEL NOTCHED TROWEL 11" (28 CM.) 3/8"X3/8" (8X8 MM.)	72908	3/8"	3/8" 8 mm 3/8"		,					
INOX NOTCHED TROWEL 11" (28 CM.) 3/8"X3/8" (8X8 MM.)	74940	8 mm			6					
STEEL NOTCHED TROWEL 11" (28 CM.) 13/32"X13/32" (10X10 MM.)	72909	3/8"		3/8"						
INOX NOTCHED TROWEL 11" (28 CM.) 13/32"X13/32" (10X10 MM.)	74941	10 mm	10 mm							
STEEL NOTCHED TROWEL 11" (28 CM.) 1/2"X1/2" (12X12 MM.)	74982	1/2"	1/2"			288				
INOX NOTCHED TROWEL 11" (28 CM.) 1/2"X1/2" (12X12 MM.)	74942	12 mm	12 mm	12 mm 12 mm	12 mm	12 mm	12 mm			270
INOX NOTCHED TROWEL 11" (28 CM.) 9/16"X9/16" (15X15 MM.)	76947	5/8" 15 mm	5/8" 15 mm			-				
STEEL NOTCHED TROWEL 11" (28 CM.) R-13/32" (10 MM.)	72910	-" - mm	-" - mm	3/8" 10 mm		270				
STEEL NOTCHED TROWEL 28 CM. YW	77923	1/4/1/2" 6 / 12 mm	3/8/1/4" 8 / 7 mm	-" - mm		-				





TROWELS & NOTCHED TROWELS CLOSED PLASTIC HANDLE

• Steel plate special high wear resistance with corrosion protection by clear coat.

	REF.	Гг			=	
STEEL TROWEL 12" (30 CM.)	65951	-" - mm	-" - mm			624
NOTCHED TROWEL 11" (28 CM.) 1/4"X1/4"	65966	1/4"	1/4"	_		
(6X6 MM.)		6 mm	6 mm	-"	6	
NOTCHED TROWEL 11" (28 CM.) 3/8"X3/8"	65967	3/8"	3/8"	- mm		480
(8X8MM.)	03707	8 mm	8 mm			400
NOTCHED TROWEL 11" (28 CM.)	65968	3/8"	3/8"			
13/32"X13/32" (10X10 MM.)	0.3700	10 mm	10 mm			

CATEGORY: PRO	OPEN HANDLE	PLASTIC	


TROWELS OPEN PLASTIC HANDLE

- $\boldsymbol{\cdot}$ Steel plate. Special high wear resistance.
- Plate trowel: 11" x 4" (28 x 12 cm).
- $\boldsymbol{\cdot}$ Plate notched trowel: 11" x 4" (28 x 12 cm).

	REF.	لتبن			=	
STEEL TROWEL 11" (28 CM.) OPEN PLASTIC	25000	-1	-"			
HANDLE	25900	- mm	- mm			
STEEL NOTCHED TROWEL 11" (28 CM.) 1/8"	25001	1/8"	1/8"			
X 1/8" (3 X 3 MM.)	25901	3 mm	3 mm			
STEEL NOTCHED TROWEL 11" (28 CM.) 3/16"	25902	1/8"	1/8"			
X 3/16" (4,5 X 4,5 MM.)	25902	4,5 mm	4,5 mm			720
STEEL NOTCHED TROWEL 11" (28 CM.) 1/4"	25903	1/4"	1/4"	_"	,	
X 1/4" [6 X 6 MM.]	23903	6 mm	6 mm	- mm	6	/20
STEEL NOTCHED TROWEL 11" (28 CM.) 5/16"	25905	3/8"	3/8"			
X 5/16"(8 X 8 MM.)	25905	8 mm	8 mm			
STEEL NOTCHED TROWEL 11" (28 CM.)3/8"	25007	3/8"	3/8"			
X 3/8"(10 X 10 MM.)	25906	10 mm	10 mm			
STEEL NOTCHED TROWEL 11" (28 CM.) 1/2"	25007	1/2"	1/2"			
X 1/2" (12 X 12 MM.)	25907	12 mm	12 mm			



RUBI TROWELS & BRICK TROWEL RANGE

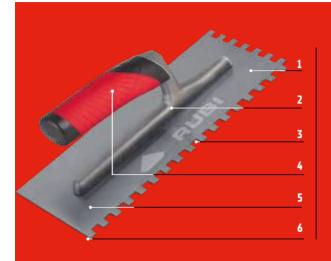

Extremely light and resistance aluminium reinforcement.

Highly rigid fixation between the reinforcement and the plate.

Steel/stainless steel plate with high resistance to abrasion.

Ergonomic RUBIFLEX handle with two textures.

Corrosion protection with clear varnish.

Perfect flatness of the plate.

- 1 Special white nylon lap for tapping without staining.
- 2 Wooden handle in varnished beech.
- 3 Nickel-plated notched ring to increase handle fixation.
- 4 Solid, non-detachable mounting between handle and pin.
- 5 Fusion technique to forging temperature. Fully guaranteed for life against breakage.
- 6 Perfect flatness of the entire plate.
- 7 Plate protected against corrosion.
- 8 Fibres oriented lengthwise during plating. Specific thermal treatment on:
 - Plate, to improve flexibility and prevent wear-off.
 - Pin, to improve hardness and rigidness.
- 9 Maximum lightness retaining its resistance.
- 10 Total regularity of all fabrications.
- 11 Perfect adaptation of shapes, sizes and specific characteristics of each market demands.



PALETTE LENGTH BY COLOUR

	S	М	L	XL
t\(\rightarrow \)	50-99 mm	100-129 mm	130-169 mm	170-200 mm
	1 ¹%٬°-3 %՞	3 ½6"-5 1/6"	5 %"-6 %"	6 11/16"-7 1/8"



BRICK TROWELS

 PERFECT ADAPTION IN SHAPES, SIZES AND SPECIFIC CHARACTERISTICS MEETING THE DEMANDS OF EACH MARKET.





PFP01

· Ergonomic RUBIFLEX.



	REF.	B	X.	Ċ	-
PFP01-120 MM.	75012	4 3/4"	2 7/8"	0.33069 lb	
[4 3/4"]	73012	120 mm	73 mm	0,150 kg	,
PFP01-140 MM.	75014	5 1/2"	2 "	0.3483268 lb	0
[5 1/2"]	/ 3014	140 mm	75 mm	0,158 kg	



PFP05

• Ergonomic RUBIFLEX.



	REF.	18	Ž,	Ö	=
PFP05-180 MM.	75418	7 1/8"	4 1/8"	0.628311 lb	
[7 1/16"]	/3410	180 mm	105 mm	0,285 kg	,
PFP05-200 MM.	75420	7 7/8"	4 3/8"	0.7032674 lb	0
[7 7/8"]	/3420	200 mm	110 mm	0,319 kg	



PFM06

· Varnished beechwood handle.



	REF.	18	X	Ö	
PFM06-200 MM.	35520	7 7/8"	5 3/8"	0.793656 lb	4
[7 7/8"]		200 mm	137 mm	0,360 kg	U



PFP10

• Ergonomic RUBIFLEX.



	REF.	68	X	Ŏ	[<u></u>
PFP10-130 MM.	75913	5 1/8"	2 3/4"	0.2777796 lb	6
[5 1/8"]		130 mm	70 mm	0,126 kg	



PFP19

• Ergonomic RUBIFLEX.



	REF.	B	K.	Å	=
PFP19- 80 MM.	76808	4 1/4"	3 1/8"	0.3350992 lb	
[4 5/16"]	/0000	109 mm	80 mm	0,152 kg	,
PFP19- 90 MM.	7/000	5 1/8"	3 1/2"	0.3703728 lb	0
[5 1/16"]	76809	128 mm	90 mm	0,168 kg	





PFM22

· Varnished beechwood handle.

	REF.	18	X,		<u>-</u>
PFM22-165 MM.	37116	6 5/8"	4 5/8"	0.7914514 lb	
[6 5/8"]	3/110	168 mm	119 mm	0,359 kg	,
PFM22-180 MM.	37118	7 1/4"	4 7/8"	0.815702 lb	0
[7 1/4"]	3/110	184 mm	124 mm	0,370 kg	



PFP22

• Ergonomic RUBIFLEX handle.

	REF.	18	X,	Ö	<u>-</u>
PFP22-165 MM.	77116	6 5/8"	4 5/8"	0.8068836 lb	
[6 5/8"]	//110	168 mm	119 mm	0,366 kg	,
PFP22-180 MM.	77118	7 1/4"	4 7/8"	0.981047 lb	0
[7 1/4"]	//110	184 mm	124 mm	0,445 kg	



PFM23

· Varnished beechwood handle.

	REF.	B	K.	Å	
PFM23-180A MM.	77350	7 1/4"	4 5/8"	0.7804284 lb	,
[7 3/16"]		183 mm	117 mm	N 354 kø	0



PFP23

• Ergonomic RUBIFLEX handle.

	REF.	18	Ž,	Ö	=
PFP23-180 A MM.	77258	7 1/4"	4 5/8"	0.7958606 lb	
[7 3/16"]	//230	183 mm	117 mm	0,361 kg	,
PFP23-185 B MM.	77268	7 1/8"	5 1/8"	0.859794 lb	6
[7 1/8"]	//200	181 mm	131 mm	0,390 kg	



PFM24

 $\boldsymbol{\cdot}$ Varnished beechwood handle.

	REF.	B	K	Ċ	=
PFM24-140 MM.	37314	5 1/2"	3 1/4"	0.3218716 lb	
[5 1/2"]	3/314	140 mm	82 mm	0,146 kg	
PFM24-160 MM.	7771/	6 1/4"	3 5/8"	0.3350992 lb	,
(6 5/16")	37316	160 mm	92 mm	0,152 kg	6
PFM24-180 MM.	77710	7 1/8"	41/8"	0.5643776 lb	
[7 1/16"]	37318	180 mm	103 mm	0,256 kg	







PFP24

· Ergonomic RUBIFLEX handle.

	REF.	6	X		<u>-</u> H
PFP24-140 MM.	77314	5 1/2"	3 1/4"	0.3395084 lb	
[5 1/2"]	//314	140 mm	82 mm	0,154 kg	
PFP24-160 MM.	77316	6 1/4"	3 5/8"	0.3373038 lb	
[6 5/16"]	//310	160 mm	92 mm	0,153 kg	,
PFP24-180 MM.	77318	7 1/8"	4 1/8"	0.5798098 lb	6
[7 1/16"]	//518	180 mm	103 mm	0,263 kg	
PFP24-200 MM.	77320	7 7/8"	4 3/8"	0.606265 lb	
[7 7/8"]	77320	200 mm	110 mm	0,275 kg	





PFP25

· Ergonomic RUBIFLEX handle.

	REF.	B	L	Ċ	
PFP25-180 MM.	77418	7 1/8"	4 3/8"	0.6679938 lb	,
[7 1/16"]	//410	180 mm	110 mm	0,303 kg	0







· Varnished beechwood handle.



	REF.	B	X	Ĉ	<u>-</u>
PFM26-200 MM.	77530	7 7/8"	5 1/4"	0.815702 lb	,
[7 7/8"]	3/520	700 mm	137 mm	N 370 Va	0



PFP33

· Ergonomic RUBIFLEX handle.

	REF.	18	X,	Ŏ	=
PFP33-170X50 MM.	79050	6 3/4"	1"	0.3395084 lb	,
[6 11/16" X 1 15/16"]	/7030	170 mm	50 mm	0,154 kg	0





PFM55

- $\boldsymbol{\cdot}$ Special for tile installers, sharp arrow.
- · Varnished beechwood handle.

	REF.	B	L	Ċ	=
PFM55-165 MM.	38416	6 1/2"	4 1/2"	0.617288 lb	
[6 1/2"]	20410	165 mm	114 mm	0,280 kg	U



FLOATS

· PLASTER FLOATS



A





RETICULATED POLYETHYLENE FLOATS

- For finish floating mortar plastering.
- Maximum lightness and resistance to wear off.
- Very low water absorption. Guarantees dimensional stability.

	REF.	- N
POINT TIP POREX TROWEL 8 7/8" X 5 1/2" (24 X 14 CM)	83998	10
RECTANGULAR POREX TROWEL 8 7/8" X 5 1/2" (24 X 14 CM)	83999	10





POREX FLOATS

- For plastering walls.
- · Density and hardness permits an even finish.

	REF.	=	
POINT TIP POREX TROWEL 9 1/2" X 5" (24 X 14 CM.)	83993	10	240
RECTANGULAR POREX TROWEL 9 1/2" X 5" (24 X 14 CM.)	83992	10	240





ROUGH PLASTIC HANDLE FLOATS

- Reinforced plate of high resistance to abrasion and long durability.
- Perfectly flat base.

	REF.	=	
POINT TIP FLOAT 10 X 5" (27 X 14 CM.)	71941		360
RECTANGULAR FLOAT 10" X 7" (27 X 18 CM.)	71943	10	240
RECTANGULAR FLOAT 13" X 9" (34 X 23 CM.)	71944		180





RUBBER GROUT FLOATS

- · RUBBER FLOATS FOR GROUTING, WITH ERGONOMIC OR WOODEN HANDLES.
- · AVAILABLE IN DIFFERENT RUBBER TO OBTAIN THE BEST FINISHING ACCORDING TO THE JOINT WIDTH.





GROUT FLOATS SUPERPRO WOOD

- · Wood ergonomic handle.
- · Available in different hardnesses of rubber for best finish as the joint width.
- · Rubber float trowel, with white rubber sheet wear resistant.
- Solid rubber float, with hard rubber abrasion resistant. Thermoflex float, medium hardness.

	REF.		
RUBBER GROUT FLOAT SUPERPRO	65970		
THERMOFLEX RUBBER GROUT FLOAT SUPERPRO	65976	6	540
SOLID RUBBER GROUT FLOAT SUPERPRO	65975		







- · Available in different hardnesses of rubber for best finish as the joint width.
- Rubber float trowel, with white rubber sheet wear resistant.
- Solid rubber float, with hard rubber abrasion resistant. Thermoflex float, medium hardness.

	REF.	[]	
RUBBER GROUT FLOAT SUPERPRO	65971		
THERMOFLEX RUBBER GROUT FLOAT SUPERPRO	65973	6	540
SOLID RUBBER GROUT FLOAT SUPERPRO	65972		



GROUT FLOATS PRO

- · Black foam rubber.
- Grout Float PRO 9"x4" 22.5x10cm. (Ref.10607), with white rubber sheet wear resistant.

	REF.	=	
RUBBER GROUT FLOAT 9"X4"X19/32" (22,5X10X1,5CM)	10607	6	384
GROUT FLOAT PRO 9 1/2"X4 3/4"X13/32" (24X12X1CM)	24968	10	
GROUT FLOAT PRO 11"X5"X13/32" (28X14X1CM)	24969	10	-



CATEGORY:

CATEGORY:

REPLACEABLE GROUT FLOAT PRO

- Grout Float (Ref.84924) with sheet resistant to abrasion.
- Replaceable with spare (ref. 84925).



	REF.	<u> </u>
REPLACEABLE GROUT FLOAT PRO	84924	6
SPARE GROUT FLOAT PRO	84925	15



FLOATS FOR PLASTER

• TROWELS FOR THE CORRECT APLICATION AND SMOOTHING OF PLASTER.





PLASTER FLOATS

• Flexible polyethylene and nonstick base.

	REF.	-
PLASTIC HANDLE FLOAT 12" X 5" (30 X 14 CM.)	71904	6





FLEXIBLE PLASTER FLOATS

- For multi finish and skimming plaster jobs (also compatible with microcement).
- · Ideal for vertical jobs in heights.
- 1,2 mm thick polypropylene (PP) plate.

	REF.	=
FLEXIBLE FINE PLASTIC HANDLE FLOAT	72824	6

SPATULAS

• GREAT VARIETY OF SPATULAS FOR MULTIPLE PURPOSES.







WALL TILE GROUT SPATULA

· For filling joints.

	REF.	=
WALL TILE GROUT SPATULA 13" (35 CM.)	65935	1
WALL TILE GROUT SPATULA 7" (18 CM.)	65954	1



FLOOR TILE GROUT SPATULA

- Reinforced spatula for professional jobs. Replaceable strip that can be used on both sides.
- · Includes grip and aluminium holder.

	REF.	
FLOOR TILE GROUT SPATULA 24" (60 CM.)	70905	1



CATEGORY:

GENERAL PURPOSE SPATULA

· Adaptable to WOODEN HANDLE(Ref. 65450) Not included.

REF.

GENERAL PURPOSE SPATULA 17" (44 CM.)	65919	1
GENERAL PURPOSE SPATULA 24" (60 CM.)	70902	1

 (\circ)

0

















ALUMINIUM HANDLE

· Adaptable to floor tile grout spatula 50, 60 and 75 cm.

REF.



ALUMINIUM HANDLE 70904 1



CATEGORY: SUPERPRO

WOODEN HANDLE

• Holder for general purpose spatula of 44cm Ref.65919 and 60cm Ref.70902.

REF.

WOODEN HANDLE	65450	1



STAINLESS STEEL PAINT SPATULA RUBIFLEX HANDLE

• Stainless steel plate with ergonomic RUBIFLEX handle.



	REF.	-
STAINLESS STEEL PAINT SPATULA 1" 5/8 (40 MM.)	73909	
STAINLESS STEEL PAINT SPATULA 2" 1/2 (63 MM.)	73914	
STAINLESS STEEL PAINT SPATULA 3" (75 MM.)	73911	10
STAINLESS STEEL PAINT SPATULA 4" (100 MM.)	73912	
STAINLESS STEEL PAINT SPATULA 6" (150 MM.)	73913	



SCRAPERS

· MORTAR SCRAPERS, SINGLE LAYER, JOINTS AND PLASTER.








FACADE MORTAR SCRAPER 16" X 2 7/8" (50X72MM)

- · Facade mortar scraper with wooden handle.
- Plate dimensions: 6x2 7/8" (150x72mm).

	REF.	= 1
WOODEN HANDLE SCRAPER 6X2" 7/8 (150X72 MM.)	65963	6





FACADE MORTAR SCRAPER 10" X 5 3/4" (250X144MM)

- Facade mortar scraper with two types of handles: Wood and plastic.
- plate dimensions 10" x 5 3/4" (250x144mm).

	REF.		
WOODEN HANDLE SCRAPER 10" X 5 3/4" (250X144 MM.)	72960	6	480
SPARE SCRAPER 10" X 5 3/4" (250X144 MM.)	65957	18	-
PLASTIC HANDLE SCRAPER 10" X 5 3/4" (250X144 MM.)	65962	6	480





ALUMINIUM PLASTER SCRAPER

- · Manufactured with aluminium, with 8 blades.
- Dimensions 18" x 3 13/32" (455 x 86 mm).

	REF.	Å	
ALUMINIUM PLASTER SCRAPER	72961	1.98414 lb 0,9 kg	1





JOINT SCRAPER

- Ergonomic handle with two electroplated tungsten carbide plates with high resistance to abrasion.
- $\boldsymbol{\cdot}$ Useable with 1, 2 or 3 plates depending on width of the joint.
- $\boldsymbol{\cdot}$ Supplied in blister.

	REF.	=	
JOINT SCRAPER	65907	5	600
SPARE JOINT SCRAPER	71974	10	4600



RUBISCRAPER-250

ELECTRIC GROUT SCRAPER

For grout removal without damaging the tile.







- $\cdot \ \textbf{Ergonomic design and bi-material finishing, for greater comfort and better stability.} \\$
- · Light and resistant. Maximum reliability.
- · Blades made in tungsten carbide. Resharpenable for a greater performance. Patented model.
- · Fast locking / unlocking system for easy assembly of blade.
- · Ideal for repair work (replacement of broken tiles).
- $\boldsymbol{\cdot}$ Equipped with 3 speeds. V1: 6500 i.p. / V2: 8000 i.p. / V3: 9500 i.p.
- Power: 250 W.
- · Stroke length: 2 mm.
- Double insulation.
- Blades for joints of 1.5 mm (ref. 66810, use only with speed 1) and 3 mm (ref. 66812) included.
- Includes 2 special blades (steel made) to remove rests of thin-set from the back of the tiles or on the substrate.
- With transport case.
- Interchangeable blades for 1.5,2,3 and 4 mm joints.











	REF.	5	W	=
RUBISCRAPER-250	66940	230V-50Hz		
RUBISCRAPER-250 UK	66941	250 V-50H2 250 W		1
RUBISCRAPER-250 USA	66942	120V-60Hz		

ACCESSORIES RUBISCRAPER Blades









RUBISCRAPER BLADES

• Resharpenable and easily interchangeable blades, available for 1.5mm (use only with speed 1), 2mm, 3mm and 4mm grout sizes.

	REF.	<u>-</u>
1.5 MM (1/16") BLADE FOR RUBISCRAPER	66810	
2 MM (3/32") BLADE FOR RUBISCRAPER	66811	1
3 MM (1/8") BLADE FOR RUBISCRAPER	66812	1
4 MM (5/32") BLADE FOR RUBISCRAPER	66813	

MARKERS, SUPPORTS AND TEMPLATES

 WIDE RANGE OF MARKERS, SUPPORTS AND TEMPLATES FOR THE PLACEMENT OF TILES.







RULE SUPPORT SET

- For easy adjustment and levelling of the rule for wall tiling.
- In box of 2 units.

	REF.	<u>-</u>	
RULE SUPPORT SET 12" (30 CM.)	60991	1	207
RULE SUPPORT SET 20" (50 CM.)	60998	1	





· Hold firmly the rulers on the walls, allowing a comfortable placement of tiles.



RULE HOLDER NAIL 10" (250 MM.) 72941 6		REF.	=
	RULE HOLDER NAIL 10" (250 MM.)	72941	6





SHAPE TEMPLATE

• Copies the shape of the areas which are awkward to mark onto tiles, for subsequent cutting. Maximum depth 4.5cm.

	REF.	#
SHAPE TEMPLATE	70925	10







HOLE MARKER

- For marking the position of holes for tubing and electrical fitting, from the wall to the tile, for subsequent cutting or drilling.
- · Maximum length 26" (65cm).

	REF.	<u> </u>
HOLE MARKER XL	72953	6



MASTER LINE MARKER

- Ideal system to quickly draw straight lines between two points of the wall or floor.
- Supplied with a bottle of high quality powder for line marker.

	REF.	<u>-</u>
MASTER LINE MARKER	70928	6





"MASTER-N" LINE MARKER

- · Ideal system to quickly draw straight lines between two points of the wall or floor.
- · Supplied with a bottle of high quality powder for line marker.
- Manufactured in plastic bimaterial (RUBIFLEX) high resistance to impact.
- Includes auxiliary level for levelling rope before tagging.
- · Length of rope: 30 m.

	REF.	=
"MASTER-N" LINE MARKER	75925	6



STANDARD LINE MARKER

- · Ideal system to quickly draw straight lines between two points of the wall or floor.
- · Supplied with a bottle of high quality powder for line marking.
- · Length of rope: 15m.

	REF.	=
LINE MARKER W/TRACING POWDER	70926	6





HIGH QUALITY BLUE POWDER FOR LINE MARKER

 $\boldsymbol{\cdot}$ Blue powder for filling the line marker.

	REF.	=
SPARE BLUE POWDER FOR LINE MARKER 2.2 LB. (1 KG.)	70929	6







CONSTRUCTION PENCIL

- Specially designed for writing on wet or glazed surfaces like ceramic tile, marble, granite, etc.
- Set of 2 construction pencils supplied in blister.

	REF.		
CONSTRUCTION PENCIL	65942	50	450



LINE REEL

· High resistance polyester cord.

	REF.	
LINE REEL 0 3/8X164 FT. (1.7 MM. X 50 M)	80933	12

MALLETS

 MALLETS FOR LEVELLING THE HEIGHT OF THE TILES THROUGH OUT INSTALLATION.







RUBBER MALLET - 2 FLAT SIDES

· Allows to strike at any angle so as to install the tile into its correct position.

	REF.	- U	
BLACK RUBBER MALLET 8.8 OZ. (250 GR.)	65904		336
BLACK RUBBER MALLET 17.6 OZ. (500 GR.)	65905	6	220
BLACK RUBBER MALLET 26.4 OZ. (750 GR.)	65908		252





· Allows to strike at any angle. One flat surface and the other spherical.



	REF.	- M	
WHITE RUBBER MALLET 8.8 OZ. (250 GR.)	66905		77/
WHITE RUBBER MALLET 17.6 OZ. (500 GR.)	66906	6	336
WHITE RUBBER MALLET 26.4 OZ. (750 GR.)	66907		252

Æ



SOFT BLACK RUBBER MALLET

 $\boldsymbol{\cdot}$ A softer mace to protect the ceramic pieces.

	REF.	<u> </u>
SOFT BLACK RUBBER MALLET 17.6 OZ. (500 GR.)	88555	50
SOFT BLACK RUBBER MALLET 26.4 OZ. (750 GR.)	88553	40



SUCTION CUPS

\cdot suction cups to facilitate the handling of ceramics and other SMOOTH MATERIALS.





SINGLE SUCTION CUP

· Maximum load capacity: 88 Lb (40 kg).

	REF.	=
SINGLE SUCTION CUP	65900	1



DOUBLE SUCTION CUP

- · Body made of highly resistant aluminium. With ergonomic handle for greater comfort.
- · Maximum load capacity: 176,4LB (80 kgs).





TRIPLE SUCTION CUP

- · Body made of highly resistant aluminium. With ergonomic handle for greater comfort.
- · Maximum load of capacity: 220lbs (100 kg).

	REF.	=	
TRIPLE SUCTION CUP	66904	1	80



RM ROUGH SURFACE SUCTION CUP

- Suction cups for handling tiles with rough and/or slightly structured surfaces.
- · Injected polycarbonate body. Very light.
- Metal reinforcement in the lever base for greater tensile strength.
- Ergonomic polypropylene handle for faster, safer handling.
- · Natural rubber.
- · Maximum load capacity:55 lb (25 kg).
- · Suction cup diameter: 4 3/4" (120 mm).

	REF.	<u>-</u>	
RM ROUGH SURFACE SUCTION CUPS	66929	1	280



ROUGH

RM ROUGH SURFACE DOUBLE SUCTION CUP

- Double suction cup for handling tiles with rough and/or slightly structured surfaces.
- · Body made of highly resistant aluminium.
- · Metal reinforcement in the lever base for greater tensile strength.
- Ergonomic polypropylene handle for faster, safer handling.
- · Maximum load capacity: 55 kg.
- · Suction cup diameter: 120 mm.

	REF.	=	
RM ROUGH SURFACE DOUBLE SUCTION CUP	66952	1	96





OCTO-USB ENERGY

SAFE & EASY TO USE

Suction cup to lift ceramic tiles with smooth or slightly textured and clean surfaces.



- Battery suction cup designed for handling ceramic tiles.
- 3.7V / 2 Ah. battery integrated in the suction cup and charging via USB-C cable. (cable included, charger not included).
- · Water and dust proof buttons. IP30.
- Digital display with 4 indicators: Vacuum / Release / ON / Charge + MBAR pressure info screen.
- Max load capacity: 140 kg only for flat & smooth surfaces and horizontal handling.
- $\boldsymbol{\cdot}$ Plastic case for transport and protection.

	REF.	5	Q	Ċ	*	=
OCTO-USB ENERGY	66967	3.7V / 2Ah	8 5/8" 220 mm	2.667566 lb 1,21 kg	3.3069 lb 1,5 kg	10











VACUUM



SC-200 SUCTION CUP WITH VACUUM PUMP

- · Suction cup for handling large and heavy tiles.
- · Special for textured surfaces.
- · Adapts to any surface finish.
- · Suction applied by manual vacuum pump.
- · Load loss indicator (red mark).
- · Pressure-release mechanism.
- · Maximum load capacity: 243 lb (110 kg).

	REF.	\bigcirc	*		
SC-200 VACUUM PUMP CUP	18919	7 7/8"	3.3069 lb	0	on
	10717	200 mm	1,6 kg	0	70





VACUUM



NO MARKS

GSC-200 VACUUM SUCTION CUP

- Suction cup for the manipulation of large ceramic tiles and heavy porcelain slabs.
- · Adapts to the surface without leaving any marks.
- · Fixing by vacuum manual pump.
- Load loss indicator (red mark).
- · Pressure release mechanism.
- · Maximum load capacity: 110 kg.
- High resistance plastic body.
- · Transport suitcase.

	REF.	Q	*	<u> </u>	
GSC-200 GREY VACUUM SUCTION	21951	7 7/8" 200 mm	3.3069 lb 1,5 kg	8	90

TILING ACCESSORIES





ABRASIVE BLOCK

- · Fine and coarse grit.
- Smooths out tiles.

H. 140	Minimal Inc.	-	13	AS
Marrie	THE STREET	eg ja pe a		機匠
	SERVICE BY			Maria Land

	REF.	
ABRASIVE BLOCK	05972	5



GLUE GUN APPLICATOR

- · Glue applicator 55 W. High performance.
- 100~240V/50-60Hz.
- · Compatible with bars of Ø11 Ø12mm.
- · Universal glue.

	REF.	=	
GLUE GUN APPLICATOR	65940	6	432
25 GLUE BARS OF 8" (195 MM.)	65946	10	800



WORK TABLES








FOLDING 4-IN-1 WORKING TABLE

- 4 uses in 1: Work bench, scaffold, dolly and creeper.
- · Foldable, easy to transport and storage.
- Double sided board: MDF wood side (work bench function) and non-slippery PP plastic side (rest of functions). EASY interchangeable.
- Reinforced stainless steel area for harder jobs. Avoids damages on wooden surface.
- Angle conveyor and rule printed on the wooden side. Also includes a hole for small drillings (max. 25 mm) and hand tools inserts on metal frame.
- · Folded table: 80x52x12,5cm.
- · Unfolded table: 115x52x80cm.

	REF.	=	
FOLDING 4-IN-1 WORKING TABLE	66924	1	16

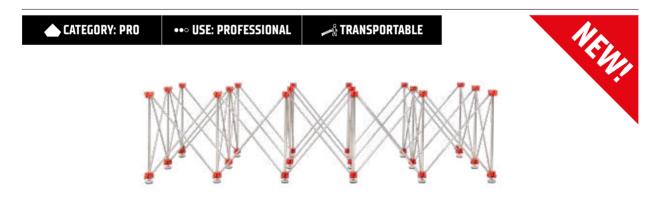

RETRACTABLE WORKTABLE

- · Lightweight retractable structure with high load capacity.
- $\boldsymbol{\cdot}$ Easy to transport with wheels and carrying bag.
- Takes up very little space when folded.
- $\boldsymbol{\cdot}$ Easy to assemble and disassemble almost instantly, no tools required.
- · Deployed dimensions.
- 300 X 120 TABLE: 75 x 300 x 120 cm.
- 120 X 120 TABLE: 75 x 120 x 120 cm.
- Maximum load (depending on final material):
- · 300 X 120 TABLE: 1500 kg.
- 120 X 120 TABLE: 700 kg.

	REF.	=
RETRACTABLE WORKTABLE 300X120	28917	1
RETRACTABLE WORKTABLE 120X120	28918	1



RUBI LUMEO













RUBIMIX E-9 ENERGY CAS RUBIMIX E-10 ENERGY CAS ANGLE GRINDER TECH RUBI LUMEO QUAKE ENERGY CAS RUBI TRILLER ENERGY CAS 18 V 5.2 Ah 18 V 5.2 Ah 18 V 5.2 Ah 18 V 5.2 Ah 18 V 2.0 Ah 12 V 4.0 Ah



RUBI LUMEO ENERGY CAS

- · Universal battery-operated work light.
- · Lightweight and powerful for professional users.
- Extremely robust (IKO7) and versatile with 5-level adjustable light output (from 400 to 4000 lumens).
- Stylish design with carrying handle and support for flexible positioning through direct mounting on the TRIPOD accessory.
- · Suitable for both indoor and outdoor work (IP67).
- · Operates with an 18V CAS battery.
- Includes a small spare battery in case of failure or battery depletion.

	REF.	=
RUBI LUMEO ENERGY CAS	10940	1



RUBI TRIPOD LUMEO

- The practical design of the TRIPOD makes it an indispensable accessory for the stationary positioning of work lights, especially for illuminating a specific work area.
- Extendable from 1.35 to 3 meters, the tripod offers total flexibility to place the work light at the required height and the option to tilt the mounted light to provide the optimal light angle.
- With its extremely compact design, the tripod is easy and convenient to transport and install wherever necessary.
- Features QUICK RELEASE function and is made of black painted aluminium. The tripod is very durable and can be used both indoors and outdoors.
- Maximum load 10 kg.
- Its robust construction makes it safe even when fully extended.
- · Net weight 6 kg.

	REF.	=
RUBI TRIPOD LUMEO	10939	1



TOOLS BOXES

• TOOL BOXES FOR THE CONSTRUCTION PROFESSIONAL.



CATEGORY: SUPERPRO

TRAY COMPARTMENTS



PLASTIC TOOL BOX

- · Light and highly functional tool box. With wheels and handle for transport.
- · Comes with 2 holders and 4 fitments for attaching objects using elastic bands.
- Consists of 1 tray with 14 compartments that can be configured to specific needs and 1 inside tray with 4 compartments.
- · Capacity 15 GL. (55 L).
- Outer Dimensions: 24" x 14" x 16" (61 x 37 x 42 cm).
- Inner Dimensions: 20" x 12" x 14" (51 x 31 x 35 cm).

	REF.	<u>-</u>	
PLASTIC TOOL BOX	71954	1	8

CATEGORY: SUPERPRO



PROFESSIONAL TOOL BOX

- \cdot Large tool box. With wheels and handles for transport.
- · Lid with 2 pockets and 4 hangers to fix objects with rubber bands (Not Included).
- It contains internal tray with 4 compartments.
- Outer Dimensions: 31" x 19" x 20" (80 x 49 x 50 cm).
- Inner Dimensions: 24" x 14" x 16" (62 x 35 x 41 cm).
- · Capacity: 25 GL (89 L).

	REF.	=	
PROFESSIONAL TOOL BOX	75965	1	4



MALLETS & HAMMERS

 MALLETS AND HAMMERS OF GREAT QUALITY WITH TWO TYPES OF HANDLES, WOOD AND RUBIFLEX.







STONING HAMMER WOOD HANDLE

- · Special forged Steel head, tempered and hardened.
- · SPANISH type head with electrostatic black paint coating and milled hitting ends.
- · Varnished, HICKORY wood handle.
- Head's fixation to handle by cylindrical steel wedge and sealed by resin.
- Weight balanced to reduce hand's kickback.

	REF.	=
STONING HAMMER WOOD HANDLE 700 GR.	71896	6



STONING HAMMER SOFTGRIP HANDLE




- SPANISH type head with electrostatic black paint coating and milled hitting ends.
- PP handle with fibre glass core, optimal for shock absorption. Improves handle's long-life.
- Bi-material SOFTGRIP handle, non-slippery and grooved for a better grip.
- Head's fixation to handle by cylindrical steel wedge and sealed by resin.
- · Weight balanced to reduce hand's kickback.


STONING HAMMER SOFTGRIP HANDLE 700 GR. 71898 STONING HAMMER SOFTGRIP HANDLE 1000 GR. 71899		REF.	<u>-</u>
STONING HAMMER SOFTGRIP HANDLE 1000 GR. 71899	STONING HAMMER SOFTGRIP HANDLE 700 GR.	71898	
	STONING HAMMER SOFTGRIP HANDLE 1000 GR.	71899	0



CATEGORY: SUPERPRO

FRAMER HAMMER RUBIFLEX HANDLE





- · Security connection between handle and steel head by inverse cone.
- · Grip with elastic slip-proof elastic and surface grooves for maximum hold.

	REF.	
FRAMER HAMMER 20" (500 MM.)	82986	6



MASONRY PICK

- Made of special tempered steel, highly resistant at breaking point.
- · Normalised heat treatment and tempered tip.

	REF.	=
MASON PICK (SPADE/PICK) 18 OZ. (500 GR.)	82980	6



CHISELS

· WIDE RANGE OF CHISELS, POINT CHISELS AND NIPPERS.







FLAT CHISELS

- ${\boldsymbol \cdot}$ Made of CrVa. alloy steel. Forged, hardened and tempered cutting edge.
- · Regrindable.

	REF.	<u>_</u>
CHISEL 10" X 29/32" X 17/32" (250 X 23 X 13 MM.)	70916	
CHISEL 12" X 29/32" X 17/32" (300 X 23 X 13 MM.)	70917	10
CHISEL 14" X 29/32" X 17/32" (350 X 23 X 13 MM.)	70918	





- $\boldsymbol{\cdot}$ To remove tiles on renovation jobs.
- Made of CrVa. alloy steel. Forged, hardened and tempered cutting edge.



	REF.	=
WIDE CHISEL 10"/2 3/8" X 1 1/32" X 17/32" [250/60X26X13MM]	70924	10

SHOVELS

• SHOVELS AND SPADES WITH VARNISHED, WOODEN HANDLE AND SPADES HIGHLY RESISTANT AT BREAKING POINT.



CATEGORY: SUPERPRO	"Y" HANDLE	POINTTIPPED SPADE	

WOODEN RING HANDLED POINT-TIPPED SPADE

- · Shovel with D finish.
- Handle with "Y" ring shaped plastic.
- Ergonomic grip, varnished eucalyptus.

	REF.	=	
WOODEN RING HANDLED POINT-TIPPED SPADE	82963	6	36

 $\overline{}$





PROP HANDLED POINT-TIPPED SPADE

- Shovel with "D" shape finish.
- · Handle T shaped. Varnished wooden handle.

	REF.	=	
PROP HANDLED POINT-TIPPED SPADE	82964	6	36



WOODEN RING HANDLED SQUARE SHOVEL

- Squared shovel with wooden handle "Y" shaped.
- $\boldsymbol{\cdot}$ Ergonomic grip. Varnished wooden handle.

	REF.	=	
WOODEN RING HANDLED SQUARE SHOVEL	82960	6	54

CATEGORY: SUPERPRO

PROP HANDLED SQUARE SHOVEL

- \cdot Squared shovel with wooden handle " T " shaped.
- · Varnished wooden handle.

	REF.	=	
PROP HANDLED SQUARE SHOVEL	82961	6	36



NIPPERS

\cdot WIDE RANGE OF PLIERS FOR CUTTING CERAMICS, PORCELAIN & GLASS.







CARPENTER'S PINCER

- · For general use.
- · Supplied in blister.

	REF.	=	
CARPENTER'S PINCER 8 3/4" (220 MM.)	71971	5	765





NIPPERS FOR PORCELAIN TILES

• Specially for cutting narrow strips of a maximum of 7/16" (1 cm). Equipped with tungsten carbide GOLD scoring wheels with titanium surface treatment for longer useful life. By means of a gentle turn, the wheels can be repositioned when their vertex starts getting worn. If totally worn, they can be replaced using their corresponding spare piece, Ø 3/4" (18 mm) GOLD spare scoring wheel long-life (Ref.01953).

	REF.	=	
NIPPERS FOR PORCELAIN TILES	83942	5	765

CATEGORY: SUPERPRO



NIPPERS FOR CERAMIC TILES

- · Tungsten Carbide Edge.
- $\boldsymbol{\cdot}$ Ideal for the rectification of straight cut on ceramics.
- Bi-material handle Ergonomic.

	REF.	=	
NIPPERS FOR CERAMIC TILES	65926	6	-

CATEGORY: Superpro



NIPPERS FOR GLASS MOSAIC

- · Tungsten Carbide Edge.
- · Ideal for the rectification of glass mosaic tiles.
- · Bi-material handle Ergonomic.

	REF.	=	
NIPPERS FOR GLASS MOSAIC	71970	5	-

CATEGORY: SUPERPRO



TILER NIPPERS

- Tungsten Carbide Pliers.
- · Ideal for rectification of holes in ceramics.
- Bi-material handle Ergonomic.

	REF.		
PARROT NIPPERS	65925	5	765



GROUT MORTAR APPLICATORS

· JOINT APPLICATOR FOR MORTAR.







MANUAL GROUT MORTAR APPLICATOR

- · Great capacity (650 cc) grout mortar applicator.
- Very light structure made of aluminium.
- · It allows an easy, quick and clean application.
- · Reduce consumption of grout and after grouting residue.
- · Pressure adjustable with trigger.
- · Replaceable and adjustable nozzles to the joint width.
- Also usable for the application of silicone and PU rigid and flexible cartridges.
- · Quick and clean application.

	REF.	(<u></u>
MANUAL GROUT MORTAR APPLICATOR 650 CC.	65990	1





SET OF SPARE NOZZLES FOR GROUT MORTAR APPLICATOR

- \cdot Spare parts adaptable to Electric (Ref. 66915) and Manual (Ref. 65990) applicators.
- · Includes screw, piston and 3 nozzles.

	REF.	=
SET OF SPARE NOZZLES FOR GROUT MORTAR APPLICATOR	65981	1





SPARE NOZZLES

- $\boldsymbol{\cdot}$ Spare parts adaptable to Electric (Ref. 66915) and Manual (Ref. 65990) applicators.
- · Includes 6 nozzles.

	REF.	=
SPARE NOZZLES FOR GROUT MORTAR APPLICATOR	65980	1



ACCESSORIES FOR TILE FIXING AND FINISHING

Measuring systems
Tile spacers
Fast levelling systems





CONSTRUCTION LEVELS

· WIDE RANGE OF LEVELS.





RUBILEVEL

- $\boldsymbol{\cdot}$ Level manufactured in reliable, resistant aluminium.
- · Machined base up to measures of 100 cm to ensure constant accuracy.
- Accuracy: 0,5 mm/m three bubbles for checking horizontal, vertical and 45° levels.

	REF.		
RUBILEVEL 16" (40 CM.)	76920		2400
RUBILEVEL 24" (60 CM.)	76922	8	1600
RUBILEVEL 32" (80 CM.)	76923		1120
RUBILEVEL 40" (100 CM.)	76924		252
RUBILEVEL 59" (150 CM.)	76926	٦	440
RUBILEVEL 79" (200 CM.)	76927	2	448





RUBILEVEL MAGNET

- · Level manufactured with reliable, resistant aluminium.
- Machined base to ensure consistent accuracy and Neodymium magnets inserted to hold it on metal surfaces.
- · Accuracy: 0,5 mm/m.
- Three bubbles for checking horizontal, vertical and 45° levels.

	REF.	<u> </u>	
RUBILEVEL MAGNET 20" (50 CM.)	76929		1920
RUBILEVEL MAGNET 24" (60 CM.)	76930	8	608
RUBILEVEL MAGNET 32" (80 CM.)	76931		1120





RUBILEVEL ANTISHOCK

- · Levels manufactured in reliable, resistant aluminium.
- Double machining to ensure a constant precision in the top face and the base.
- Accuracy: 0,5 mm/m.
- Three bubbles for checking horizontal, vertical and and 45° levels.
- Double and ergonomic bi-material handle.
- · Rubber protector at the ends.
- DUAL view vertical vial for front measurements. Eliminates parallax error.
- MAGNIFIED horizontal vial for the CLEAREST view of the bubble.

	REF.		
RUBILEVEL ANTISHOCK 24" (60 CM.)	76932	- 8	672
RUBILEVEL ANTISHOCK 32" (80 CM.)	76933		384
RUBILEVEL ANTISHOCK 40" (100 CM.)	76934		703
RUBILEVEL ANTISHOCK 48" (120 CM.)	76935		392



XX





RUBILEVEL ALUCAST

- · Level manufactured from cast aluminium.
- · Machined base to ensure constant accuracy.
- · Accuracy: 0,5 mm/m.
- Two bubbles for checking horizontal and vertical.
- DUAL view vertical vial for front measurements. Eliminates parallax error.

	REF.		
RUBILEVEL ALUCAST 24" (60 CM.)	76938	0	1600
RUBILEVEL ALUCAST 32" (80 CM.)	76939	- 8	1120



WATER LEVEL

- Includes two graduated tanks and 20 metres of hose.
- · With caps to maintain the hose correctly filled & ready for the next use.

	REF.	=
WATER LEVEL	70965	1



MEASURING TAPES

 HOMOLOGATED PRECISION MEASURING TAPES. DIFERENT SIZES DEPENDING ON NEEDS.





RUBIFLEX MEASURING TAPES

- Ergonomic chassis made from plastic and rubber.
- · Approved precision measuring tapes: Class II
- Magnetic tape stopper. (only available in mm).




	REF.	= 1	
RUBIFLEX MEASURING TAPE 197" X 3/4" (5M X 19MM)	75901	- 12 -	864
RUBIFLEX MEASURING TAPE 315" X 1" (8M X 25MM)	75902		576



IRONBLADE MEASURING TAPES

- · Metal case with rubber coating to improve grip.
- · Approved precision measuring tapes: Class II
- · Automatic tape lock. (only available in mm).





XX



PLUMB BOB, SQUARES

· PLUMB BOBS.



CATEGORY:



PLUMB BOB

- · Length of line:16,4 ft.(5 m).
- · Includes wooden dolly.
- · Supplied in blister.

	REF.	<u></u>	
PLUMB BOB 21.2 OZ. (600 GR.)	70964	6	480

CATEGORY:



SQUARES

- Square 15/8" x 13/16" (40x20mm) with high dimensional stability.
- · With bichromated treatment.

	REF.	[
SQUARE- 24" (60 CM.)	60993	1
SQUARE- 32" (80 CM.)	60994	1

TILE SPACERS

• TILE SPACERS, "T" SPACERS AND WEDGES FOR THE CORRECT PLACEMENT OF TILES. QUALITY BASE MATERIAL.



CATEGORY: SUPERPRO



TILE SPACERS 1/32" (1MM)

- For wall & floor tiles with minimum joint.
- $\boldsymbol{\cdot}$ Quality base material, without impurities or imperfections.

	REF.	<u> </u>	
TILE SPACERS 1/32" (1 MM.) - (B-300 U.)	02911	10	1200
TILE SPACERS 1/32" (1 MM.) - (B-1000 U.)	02030	1	-

CATEGORY: SUPERPRO



TILE SPACER 1/16" (1.5MM)

- For wall & floor tiles with minimum joint.
- Quality base material, without impurities or imperfections.

	REF.	<u>-</u>	
TILE SPACERS 1/16" (1.5 MM.) - (B-300 U.)	02912	10	960
TILE SPACERS 1/16" (1.5 MM.) - (B-1.000 U.)	02031	1	-

XX







TILE SPACER 3/32" (2MM)

- For wall & floor tiles with minimum joint.
- · Quality base material, without impurities or imperfections.

	REF.		
TILE SPACERS 3/32" (2 MM.) - (B-300 U.)	02901	10	1680
TILE SPACERS 3/32" (2 MM.) - (B-1.000 U.)	02000	1	768

CATEGORY: SUPERPRO



LONG TILE SPACERS 3/32" (2 MM L)

- · For large ceramic format and rectified.
- · Quality base material, without impurities or imperfections.

	REF.	<u></u>	
LONG TILE SPACERS 3/32" (2 MM.)-L - (B-300 U.)	02952	10	960
LONG TILE SPACERS 3/32" (2 MM.) -L -(B-1000 U.)	02972	1	378

CATEGORY: SUPERPRO



TILE SPACERS 1/8" (3MM)

- For floor tiles with thin joint.
- · Quality base material, without impurities or imperfections.

	REF.	<u> </u>	
TILE SPACERS 1/8" (3 MM.) -(B-200 U.)	02902	10	1200
TILE SPACERS 1/8" (3 MM.) -(B-1.000 U.)	02001	1	324

CATEGORY:



LONG TILE SPACERS 1/8" (3MM L) "REINFORCED"

- · For large ceramic format and rectified.
- Quality base material, free from impurities and imperfections.
- · Redesigned internal geometry. High flexural strength and crushing.
- · Ideal for large format tiles in walls.

	REF.	-
LONG TILE SPACERS 1/8" (3 MM.)-L -(B-200 U.)	02953	10
LONG TILE SPACERS 1/8" (3 MM.)-L -(B-1000 U.)	02973	1

CATEGORY:



TILE SPACER 5/32" (4MM) " REINFORCED "

- · For floor tiles.
- Quality base material, free from impurities and imperfections.
- Redesigned internal geometry. High flexural strength and crushing.
- · Ideal for large formats.

	REF.	=	
TILE SPACERS 5/32" (4 MM.) -(B-200 U.)	02954	10	960
TILE SPACERS 5/32" (4 MM.) -(B-1000 U.)	02974	1	216







TILE SPACERS 3/16" (5MM)

- · For floor tiles.
- · Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.	<u></u>	
TILE SPACERS 3/16" (5 MM.) -(B-100 U.)	02903	10	960
TILE SPACERS 3/16" (5 MM.)-(B-1.000 U.)	02002	1	-

CATEGORY: SUPERPRO



TILE SPACERS 1/4" (6MM)

- For floor tiles.
- · Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.	=	
TILE SPACERS 1/4" (6 MM.) - (B-100 U.)	02036	10	540

CATEGORY: SUPERPRO



TILE SPACERS 9/32" (7MM)

- For floor tiles.
- · Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.	=	Ħ
TILE SPACERS 9/32" (7 MM.) -(B-100 U.)	02904	10	540

CATEGORY: Superpro



TILE SPACERS 13/32" (10MM)

- · For industrial or rustic tiles.
- \cdot Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.	<u> </u>	
TILE SPACERS 13/32" (10 MM.) -(B-50 U.)	02905	10	540



T FOR JOINTS





T-SPACERS 3/32" (2MM)

- · Ideal for "Brick Bond" and perimeter joints.
- · Quality base material without impurities or imperfections.

	REF.	=
T-SPACERS 3/32" (2MM) (B-300 UN.)	02861	10
T-SPACERS 3/32" (2MM) (B-1000 UN.)	02864	1



T-SPACERS 1/8" (3MM)

- · Ideal for "brick style" tiling and perimeters.
- · Quality base material, without impurities or imperfections.

	REF.	=	
T-SPACERS 1/8" (200 PC.) BAG	02923	10	1680
T-SPACERS 1/8" (3 MM.) -(B-1000 U.)	02063	1	540



T-SPACERS 3/16" (5MM)

- · Ideal for "brick style" tiling and perimeters.
- Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.	
T-SPACERS 3/16" (100 PC.) BAG	02924	10





T-SPACERS 13/32" (10MM.)

- · Ideal for "brick style" tiling and perimeters.
- · Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF.	=
T-SPACERS 13/32" (10 MM.) -(B-50 U.)	02926	10



WEDGES







WEDGES

- Wedges for tiling.
- Quality base material, without impurities or imperfections.

	REF.	=	
WEDGES 3/16" (5MM.)- (B-250 U.)	02396		1600
WEDGES 3/16" (5 MM.)-(B-500 U.)	02950		1500
WEDGES 5/16" (7.5MM.)- (B-250 U.)	02397	10	1800
WEDGES 5/16" (7.5 MM.)- (B-500 U.)	02951		960





· Orders by boxes only. Contains bags.




	REF.		×′ 🖪	
TILE SPACERS 1/32" (1 MM.) - (42 X 300 PC.) DISPLAY BOX	02123	42		
TILE SPACERS 1/16" (1.5 MM.) - (36 X 300 PC.) DISPLAY BOX	02124	36	300	
TILE SPACERS 3/32" (2 MM.) - (48 X 300 PC.) DISPLAY BOX	02125	48		32
TILE SPACERS 1/8" (3 MM.) - (42 X 200 PC.) DISPLAY Box	02127	42	200	
TILE SPACERS 3/16" (5 MM.) - (36 X 100 PC.) DISPLAY BOX	02130	36	100	
TILE SPACERS 9/32" (7 MM.) - (16 X 100 PC.) DISPLAY BOX	02132	16	100	30
TILE SPACERS 13/32" (10 MM.) - (18 X 50 PC.) DISPLAY BOX	02135	18	50	32
WEDGES - 3/16" (5 MM.) - (48 X 500 PC.) DISPLAY BOX	02279	48	500	30





CONSUMPTION

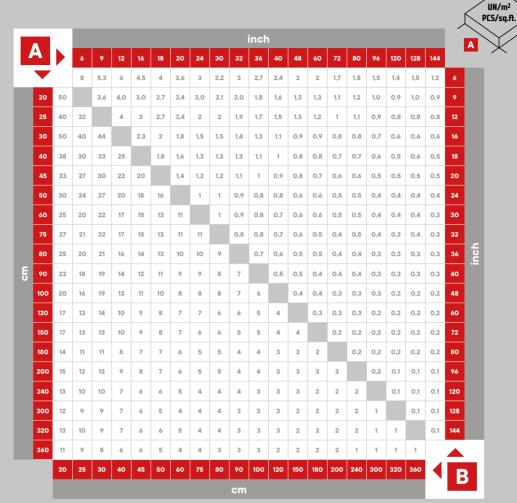

SQUARE FORMATS				
cm / inch	x / / x10 sq.ft	x m2 / x10 sq.ft.		
10 X 10 4" X 4"	140	230		
15 X 15 6" X 6"	63	103		
20 X 20 8" X 8"	35	58		
30 X 30 12" X 12"	16	26		
33 X 33 13" X 13"	13	22		
40 X 40 16" X 16"	9	15		
45 X 45 18" X 18"	7	12		
50 X 50 20" X 20"	6	10		
60 X 60 24" X 24"	4	7		
75 X 75 30" X 30"	3	5		
80 X 80 31" X 31"	3	4		
90 X 90 35" X 35"	2	3		

RECTANGULAR FORMATS				
cm / inch	x m2 / x10 sq.ft	x m2 / x10 sq.ft.		
15 X 60 6" X 24"	16	26		
15 X 90 6" X 35"	10	18		
15 X 120 6" X 47"	8	13		
20 X 40 8" X 16"	18	29		
20 X 60 8" X 24"	12	20		
20 X 80 8" X 31"	9	15		
20 X 100 8" X 40"	7	12		
25 X 100 10" X 40"	6	10		
30 X 60 12" X 24"	8	13		
30 X 90 12" X 35"	6	9		
30 X 120 12" X 48"	4	7		
40 X 80 16" X 31"	5	8		

FECIAL FU	RMATS
∭ x pz.	x pz.
2	4
2	4
2	4
2	4
2	4
2	4
	2 2 2 2



DELTA LEVEL SYSTEM: LEVELLING SYSTEM

SYSTEM TO FACILITATE THE LAYING AVOID LIPPAGE AND IMPROVING FINISHING.



- · Avoids lippage during tile laying in both floor and walls.
- For tile formats from 30x30 cm (12"x12") or bigger. Always with back buttering.
- EASY and INTUITIVE use.
- Impact removal system. ALWAYS in the direction of the grout.
- · Guarantee flatness and regularity of the laying surface.
- · Reusable wedges.
- STURDY pliers with pressure adjustment according to the tile thickness.





KIT DELTA LEVEL SYSTEM

- The kit consists of 1 pliers, 100 strips and 100 reusable wedges.
- · Packaged in a handy bucket.

	REF.	<u> </u>	
KIT DELTA LEVEL SYSTEM 1MM (3-12MM)	03956		
KIT DELTA LEVEL SYSTEM 1,5MM (3-12MM)	03957	1	80
KIT DELTA LEVEL SYSTEM 2MM (3-12MM)	03958		



DELTA LEVEL SYSTEM WEDGE N

- Prevents the generation of lippage during ceramic tile installation, both in flooring and on walls.
- · Recommended for formats of 30x30 cm and above, always with back buttering.



	REF.	=	
DELTA LEVEL SYSTEM WEDGE N (B-100 UN)	03952	12	192
DELTA LEVEL SYSTEM WEDGE N (B-200 UN)	03953	13	104
DELTA LEVEL SYSTEM WEDGE N (B-400 UN)	03954	6	48
DELTA LEVEL SYSTEM WEDGE N (C-1200 UN)	03955	1	16



DELTA LEVEL SYSTEM PLIERS FAST-FIX

- \cdot FAST-FIX regulation system. Without screws, faster and intuitive.
- · Made of steel with bi-material soft-grip handles for greater ergonomics.
- Protective cover on the pressure cam to avoid damaging the tile.

	REF.	
DELTA LEVEL SYSTEM PLIERS FAST-FIX	03901	6



PATENTED

CATEGORY:



LEVELLING CERAMIC PROTECTOR

- To protect the tiles against scratching or abrasive damage caused by friction between wedges, caps and delicate tiles, particularly in the presence of sand or hard particles.
- For Delta System wedges or Cyclone system threads.
- · Reusable.

	REF.	×′ 🗗	Ŏ	
LEVELLING CERAMIC PROTECTOR	16902	100	10.80254 lb 4,9 kg	6



CATEGORY: SUPERPRO



0,5 mm



1 mm



1,5 mm

3-12mm

11-20mm



3-12mm 11-20mm



5 mm



3-12mm

13-20mm

DELTA LEVEL SYSTEM STRIP

- · Made in PP.
- · Different models available:
- \cdot Strip 0,5 mm / 1 mm / 1,5 mm and 2 mm. for tiles from 3 to 12 mm.
- Strip 1.5 mm and 2 mm for tiles from 11 to 20 mm.
- · 3 mm and 5 mm strip for tiles from 6 to 15 mm.
- \cdot 5 mm strip for tiles from 13 to 20 mm.

'	REF.	=	
STRIP 3-12MM 0,5MM DELTA LEVEL SYSTEM (B-100 UN)	03929	22	352
STRIP 3-12MM 0,5MM DELTA LEVEL SYSTEM (B-200 UN)	03930	21	168
STRIP 3-12MM 0,5MM DELTA LEVEL SYSTEM (B-400 UN)	03931	13	104
STRIP 3-12MM 0,5MM DELTA LEVEL SYSTEM (B-2400 UN)	03932	1	16
STRIP 3-12MM 1MM DELTA LEVEL SYSTEM (B-100 UN)	02850	22	352
STRIP 3-12MM 1MM DELTA LEVEL SYSTEM (B-200 UN)	02851	21	168
STRIP 3-12MM 1MM DELTA LEVEL SYSTEM (B-400 UN)	02839	13	104
STRIP 3-12MM 1MM DELTA LEVEL SYSTEM (B-2400 UN)	02870	1	16
STRIP 3-12MM 1,5MM DELTA LEVEL SYSTEM (B-100 UN)	02840	22	352
STRIP 3-12MM 1,5MM DELTA LEVEL SYSTEM (B-200 UN)	02841	21	168
STRIP 3-12MM 1,5MM DELTA LEVEL SYSTEM (B-400 UN)	02842	13	104
STRIP 3-12MM 1,5MM DELTA LEVEL SYSTEM (B-2400 UN)	02855	1	16
STRIP 3-12MM 2MM DELTA LEVEL SYSTEM (B-100 UN)	02852	22	352
STRIP 3-12MM 2MM DELTA LEVEL SYSTEM (B-200 UN)	02853	24	192
STRIP 3-12MM 2MM DELTA LEVEL SYSTEM (B-400 UN)	02854	13	104
STRIP 3-12MM 2MM DELTA LEVEL SYSTEM (B-2400 UN)	02856	1	16
STRIP 6-15MM 3MM DELTA LEVEL SYSTEM (B-100 UN)	02866	20	320
STRIP 6-15MM 3MM DELTA LEVEL SYSTEM (B-200 UN)	02867	21	168
STRIP 6-15MM 3MM DELTA LEVEL SYSTEM (B-400 UN)	02868	11	88
STRIP 6-15MM 3MM DELTA LEVEL SYSTEM (B-2400 UN)	02869	1	16
STRIP 6-15MM 5MM DELTA LEVEL SYSTEM (B-200 UN)	06827	21	168
400 CLIPS 3/16" DELTA LEV. SYS (1/4"-9/16")	06828	11	88
2400 CLIPS 3/16" DELTA LEV. SYS (1/4"-9/16")	06829	1	16
STRIP 11-20MM 2MM DELTA LEVEL SYSTEM (B-100 UN)	02858		320
STRIP 11-20MM 1,5MM DELTA LEVEL SYSTEM (B-100 UN)	02846	20	J2U
STRIP 13-20MM 5MM DELTA LEVEL SYSTEM (B-100 UN)	06981		240











CYCLONE LEVEL SYSTEM: LEVELLING SYSTEM

SYSTEM TO FACILITATE THE LAYING AVOID LIPPAGE AND IMPROVING FINISHING.



- A tool is not required for their installation.
- EASY, QUICK and INTUITIVE to USE. Results less dependent on the skill and experience of the user.
- LARGE and ERGONOMIC Cap. Does not injure fingers when tightening.
- GUARANTEES the flatness and uniformity of the installation surface.
- System removal by IMPACT (kick or mallet). ALWAYS in the direction of the grout joint.
- · Reusable caps.
- The base of the clip ensures continuous tension between the clip and the cap.
- The lateral grooves at the base of the clip FACILITATE the spread of the adhesive, thus improving the adhesion of the tile.
- Tightening adjustment system depending on the thickness of the ceramic tile.
- Recommended for tiles with thicknesses from 3 to 20 mm.





CYCLONE KIT

- The kit consists of 300 clips and 100 reusable caps.
- · Packaged in a practical bucket.

	REF.	=
KIT CYCLONE 1,5 MM	35964	7
KIT CYCLONE 3 MM	35965	٥
KIT CYCLONE 5 MM	35903	1











- · Crowned area for better grip.
- Dimensions: 59x59x38 mm
- · Supplied in reusable container.

	REF.	=	
CYCLONE CAPS (B-100)	35949		80
CYCLONE CAPS (B-300)	35950	1	32
CYCLONE CAPS (B-1200)	35951		16



CATEGORY: SUPERPRO



LEVELLING CERAMIC PROTECTOR

- To protect the tiles against scratching or abrasive damage caused by friction between wedges, caps and delicate tiles, particularly in the presence of sand or hard particles.
- For Delta System wedges or Cyclone system threads.
- · Reusable.

	REF.	×′∃		= 1
LEVELLING CERAMIC PROTECTOR	16902	100	10.80254 lb 4,9 kg	6







CYCLONE FLAT BASE

- · Available in various models:
- Flat base clips of 1, 1.5, 2, 3 and 5 mm.
- Visual thickness identification by colour.

	REF.		
CYCLONE L.S. 1 MM FLAT BASE (B-100)	35937	36	432
CYCLONE L.S. 1 MM FLAT BASE (B-300)	35938	12	144
CYCLONE L.S. 1 MM FLAT BASE (B-2400)	35939	1	20
CYCLONE L.S. 1,5 MM FLAT BASE (B-100)	35940	36	432
CYCLONE L.S. 1,5 MM FLAT BASE (B-300)	35941	12	144
CYCLONE L.S. 1,5 MM FLAT BASE (B-2400)	35942	1	16
CYCLONE L.S. 2 MM FLAT BASE (B-100)	35943	36	432
CYCLONE L.S. 2 MM FLAT BASE (B-300)	35944	12	144
CYCLONE L.S. 2 MM FLAT BASE (C-2400)	35945	1	16
CYCLONE L.S. 3 MM FLAT BASE (B-100)	35946	36	432
CYCLONE L.S. 3 MM FLAT BASE (B-300)	35947	12	144
CYCLONE L.S. 3 MM FLAT BASE (C-2400)	35948	1	16
CYCLONE L.S. 5 MM FLAT BASE (B-100)	35900	36	432
CYCLONE L.S. 5 MM FLAT BASE (B-300)	35901	12	144
CYCLONE L.S. 5 MM FLAT BASE (C-2400)	35902	1	16

CATEGORY:



CYCLONE CROSS BASE

- · Available in various models:
- Cross base clips of 1.5 and 3 mm.
- Visual thickness identification by colour.

	REF.	=
CYCLONE L.S. 1,5 MM CROSS BASE (B-100)	35952	36
CYCLONE L.S. 1,5 MM CROSS BASE (B-300)	35953	17
CYCLONE L.S. 3 MM CROSS BASE (B-300)	35956	12

CATEGORY: SUPERPRO



CYCLONE CROSS T BASE

- Available in various models:
- $\boldsymbol{\cdot}$ 1.5 and 3 mm T-base flanges.
- · Visual identification of thickness by colours.

	REF.	=
BASE T 1,5 MM CYCLONE LS (B-100)	35958	36
CYCLONE L.S. 1,5 MM CROSS T BASE (B-300)	35959	12
BASE T 3 MM CYCLONE LS (B-100)	35961	36
CYCLONE L.S. 3 MM CROSS T BASE (B-300)	35962	12



RUBBLE CHUTES BUCKETS & TUBS

Rubble chutes
Plastic products for construction





REINFORCED PLASTIC RUBBLE CHUTES "LIGHTCHUTE"





- PLASTIC RUBBLE CHUTES ARE A SAFE AND ECONOMICAL WAY TO MOVE RUBBLE AND OTHER SITE
 WASTE FROM HIGH STOREYS TO CONTAINERS AT STREET LEVEL. THEIR EASE OF USE MEANS
 THAT THEY CAN BE UTILIZED TO GREAT EFFECT IN ANY BUILDING WORK OVER SEVERAL STOREYS.
 RUBBLE CHUTES ARE ESPECIALLY RECOMMENDABLE IN URBAN SURROUNDINGS.
- \cdot ribbed interior protects against wear and tear. Greater durability.
- · DUST REDUCTION.
- · FAST AND EASY ASSEMBLY. EQUIPPED WITH QUICK-CLIP SYSTEM.
- STACKABLE; SAVING SPACE IN STORAGE AND TRANSIT.
- · WIDE RANGE OF ACCESSORIES.





TOP PLASTIC RUBBLE CHUTE "LIGHTCHUTE"

- · For loading waste on lightchute chutes.
- · Also compatible as top Hopper or an intermediate loading point.
- · Excellent resistance to impact by deformation.
- · Higher durability.
- 6 mm thick walls with ribbed interior that protects against wear and tear.
- · Reduces dust.
- Equipped with 6 mm thick chains, according to DIN 763 norm.
- · Locking chain of 3 mm for intermediate chutes.
- Fast and easy assembly. Equipped with quick-clip system.
- · Stackable for saving space.



"LIGHTCHUTE"



TOP PLASTIC RUBBLE CHUTE







54 cm

50 cm





PLASTIC RUBBLE CHUTE STANDARD SECTION "LIGHTCHUTE"

· Attaches to sections with top and side hoppers and all other chute accessories.

485 mm

450 mm

















ACCESSORIES FOR RUBBLE CHUTES

- WIDE RANGE OF ACCESSORIES FOR RUBBER AND PLASTIC RUBBLE CHUTES.
- THEY PROVIDE A FASTER, SAFER AND MORE COMFORTABLE WAY OF FIXING THE CHUTE TO A BUILDING OR SCAFFOLDING.






CHUTE SCAFFOLD FASTENING SYSTEM

- · Mounting bracket to fix top of chute to scaffold.
- · Reinforced. Holds the weight of the chutes that hang from it.
- Easily fixes to the scaffold.
- For greater safety and security we recommend installing this piece at intermediate sections of the chute column. Specifically, one piece every 15 metres of chute.

	REF.	=
CHUTE SCAFFOLD FASTENING SYSTEM	88517	1

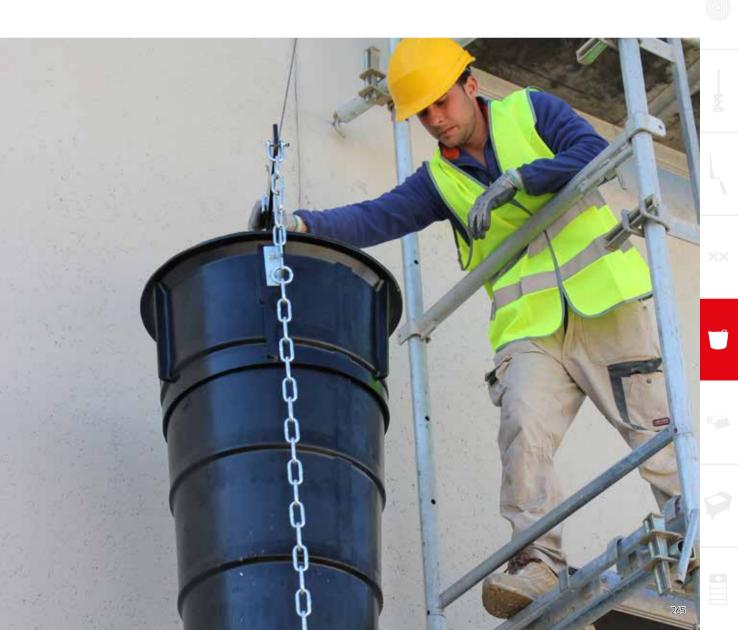



PLASTIC BUCKETS "LIGHTBUCK"

 HIGH QUALITY PLASTIC BUCKETS ARE AN OUTSTANDING OPTION DUE TO THEIR COMPETITIVE PRICE AND LIGHT WEIGHT. THE RANGE OF PLASTIC BUCKETS INCLUDES MODELS WITH CAPACITIES OF 10, 12, 15 AND 22 LITRES.





- THE COMMON CHARACTERISTICS OF ALL THE PLASTIC BUCKETS ARE:
- MADE WITH HIGH QUALITY POLYETHYLENE, GREATER ROBUSTNESS.
- SUITABLE FOR ALL TYPES OF WORK IN THE CONSTRUCTION INDUSTRY AS WELL AS OTHER
- · VERY THICK WALLS FOR MAXIMUM STRENGTH AND RESISTANCE.







ITALIANO PLASTIC BUCKET "LIGHTBUCK" (10 L.)

- · Greater comfort during transport. For easy waste collection.
- · Highly resistant metal handle.
- · Walls are reinforced with ribbing.









	REF.		<u></u>		ightharpoons		
"ITALIANO" PLASTIC BUCKET (10 L.)	88770	-" - cm	-" - mm	10 I.	2.2046 lb 1 kg	10	600





PLASTIC BUCKET WITH GRADUATION "LIGHTBUCK" (12 L.)

- · Greater comfort during transport. For easy waste collection.
- · Embossed scale.
- · Highly resistant metal handle.
- · Walls are reinforced with ribbing.









	REF.				Å	
PLASTIC BUCKET WITH GRADUATION (12 L.)	88776	-"	-"	12 I.	2.2046 lb	1
PERSITE BUCKET WITH GRADUATION (12 L.)		- cm	- mm		1 kg	1



PLASTIC BUCKET WITH GRADUATION & SPOUT "LIGHTBUCK" (15 L.)

- · Greater comfort during transport. For easy waste collection.
- · Embossed scale.
- · With spout to prevent spillages when pouring.
- · With reinforced rim for greater resistance.
- · Highly resistant metal handle.
- · Walls are reinforced with ribbing.

PLASTIC BUCKET WITH GRADUATION & SPOUT (15 L.







	REF.				ightharpoons	
.)	88775	-" - cm	-" - mm	15 I.	2.64552 lb 1,2 kg	1







PLASTIC BUCKET MODEL 2 "LIGHTBUCK" HANDLE EXT. (20 L.)

- · Greater comfort during transport. Easy waste collection.
- · Heavy duty metal handle.
- · Plastic handle. Comfort.









	REF.				Å	
PLASTIC BUCKET MODEL 2 "LIGHTBUCK" HANDLE EXT.	88712	14 5/8"	10 5/8"	20.1	1.87391 lb	1
(20 L.)	00/12	370 mm	27 cm	ZU I.	0,85 kg	1
•						





- Greater comfort during transport. Easy waste collection.
- · Heavy duty metal handle.
- Plastic handle. Comfort.

















PLASTIC TUBS "FLEXTUB"

 THE HIGH QUALITY PLASTIC TUBS ARE SUITABLE FOR USE IN VARIOUS INDUSTRIES. COMBINE OPTIMAL RESISTANCE WITH GOOD FLEXIBILITY AND ARE VERY LIGHTWEIGHT. THEIR SHAPE AND THE DESIGN OF THEIR HANDLES MEANS THAT ANY OF THE PLASTIC TUBS IN THIS RANGE CAN BE CARRIED IN ONE HAND WITH NO RISK OF BREAKAGE OR FATIGUE.





- THE COMMON CHARACTERISTICS OF ALL THE PLASTIC BASKETS ARE:
- · MADE WITH HIGH QUALITY POLYETHYLENE. GREATER ROBUSTNESS.
- SUITABLE FOR ALL TYPES OF WORK IN THE CONSTRUCTION INDUSTRY AS WELL AS OTHER INDUSTRIES.
- · VERY THICK WALLS FOR MAXIMUM STRENGTH AND RESISTANCE.



CATEGORY: PRO



PLASTIC BUCKETS "HEAVY DUTY"

- · Greater comfort during transport. For easy waste collection.
- · Reinforced handles. Greater resistance.
- · Lightweight.





BLACK PLASTIC BUCKET NO.3 (40 L.) HEAVY DUT







	REF.				Ö		Щ
γ	88778	12 " 33 cm	17 3/8" 440 mm	40 I.	2.425 lb 1,1 kg	10	300

CATEGORY:



PLASTIC TUBS №. 1 "FLEXTUB" (25 L.)

· Greater comfort during transport. For easy waste collection.



(25 L.)



PLASTIC TUB BLACK COLOUR №. 1





REF.		<u></u>		ightharpoons	=	
88771	11 3/4" 30 cm	14 1/8" 360 mm	25 I.	1.76368 lb 0.8 kg	10	450



PLASTIC TUB №. 4 "FLEXTUB" (55 L.)

- · Greater comfort during transport. For easy waste collection.
- · Lightweight.











	REF.				Å		
PLASTIC TUB BLACK COLOUR №. 4 (55 L.)	88774	12 " 33 cm	20 7/8" 530 mm	55 I.	3.52736 lb 1,6 kg	10	200








PLASTIC TUB №. 3 "FLEXTUB" (40 L.)

- Greater comfort during transport. For easy waste collection.
- · Reinforced handles. Greater resistance.
- · Lightweight.

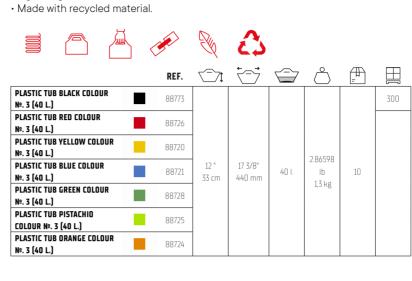





SAFETY EQUIPMENT

Personal equipment for construction professionals





KNEE PADS, ERGONOMIC SEAT AND CUSHION

· RANGE OF KNEE PADS AND ERGONOMIC SEAT.





ALL TERRAIN 4X4



KNEE CUSHION


- · Polyurethane cushion for protecting the knees.
- · Makes it easy to work on the floor without using knee pads.
- · Its wide surface allows its use as a seat.

	REF.	
KNEE CUSHION	65943	1

CATEGORY:

ALL TERRAIN 4X4

FLEX KNEE PADS



- Professional knee pads of high comfort.
- · Inner body soft materials suitable to the user,
- · Flexible and resistant outer shell.
- Conforms to EN14404.
- Protection level: 1.

	-	
	-	
	,	





ALL TERRAIN 4X4





PROFESSIONAL KNEE PADS N

- \cdot Useful for any task that requires kneeling for prolonged periods of time.
- Ideal for much more comfortable installation of tiles and flooring in general in different phases of the installation: substrate preparation, installation, grouting and cleaning.
- $\boldsymbol{\cdot}$ LARGE SUPPORT surface area for optimal STABILITY and COMFORT.
- Double strap for keeping the knee pad tightly fitted to the leg at all times.
- · Avoids blocking of blood flow at the back of the knee.
- · Quick strap fastening.
- In accordance with EN14404.
- · Performance level: 1.

	REF.	=	
SET OF PROFESSIONAL KNEE PADS N	66957	6	192





HARD SURFACES





GEL COMFORT KNEE PADS

- Ergonomic design professional and high comfort knee pads.
- Its design combines the use of hard materials against impacts and uneven floors and soft materials therein, adapted to the user's anatomy.
- In addition to protecting the user's knees through the use of silicone gel inside, its studied ergonomics provide them with great stability, preventing ligaments and tendons fatigue.
- They incorporate two bands Neoprene closure.
- · Conforms to EN14404.
- · Protection level: 1.

	REF.	<u></u>	
GEL COMFORT KNEE PADS	81998	6	96




HARD SURFACES





- Their design combines the use of hard materials to protect against impacts and uneven floors and soft materials adaptable to the user's anatomy on the inside.
- Besides protecting the user's knees thanks to the silicone gel in their inside, their studied ergonomics gives them great stability, preventing ligaments and tendons fatigue.
- · Wide range of uses thanks to their design " two in one ":
- Can be used together with the external rubber protection of great stability and resistance.
- With the main body only, less bulky, which allows the knee to slide without problem over smooth surfaces.
- They incorporate a double fastener, inferior and superior, easy adjustable.
- · Conforms to EN14404.
- Protection level: 1.

	REF.	=	
GEL DUPLEX KNEE PADS	81989	6	144

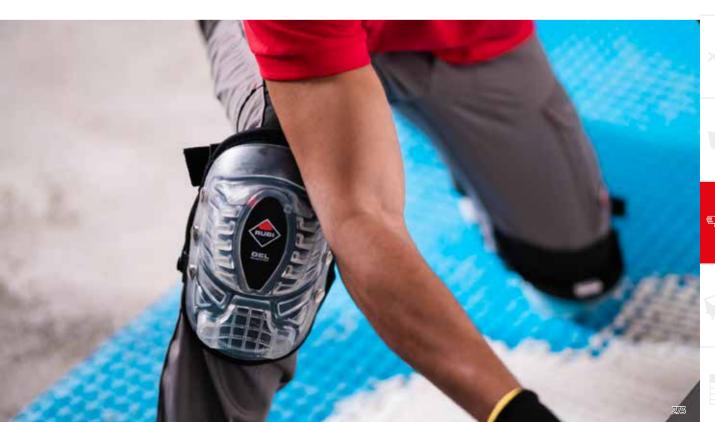






























SR-1 ERGONOMIC SEAT

- · Allows an ergonomic position of comfort.
- · Adjustable seat height and angle for optimum adaptation to each use.

- Includes tray for tools and accessories.
 Ideal for flooring, parquet installation, cleaning and other operations on
- · Replaceable ergonomic kneepads.
- · Maximum weight: 286 lb (130 kg).

	REF.		
SR-1 ERGONOMIC SEAT	81999	1	18

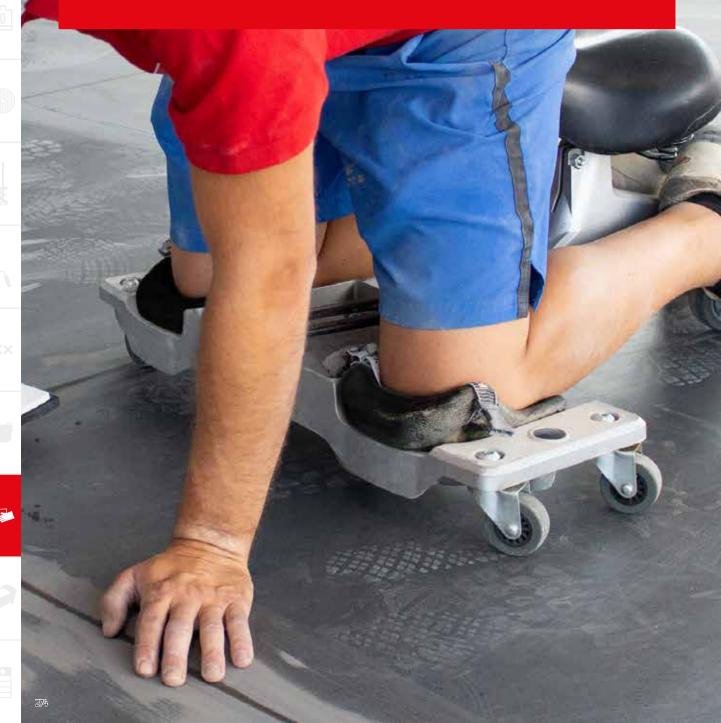



SAFETY EQUIPMENT

· PERSONAL PROTECTIVE EQUIPMENT FOR BUILDING PROFESSIONALS







WHITE LENS GOGGLES

- · Field of use: basic.
- $\boldsymbol{\cdot}$ Mechanical resistance to high speed particles, low energy.
- · Extendable in length and vertically adjustable side pieces.
- · Anti-scratch and anti-fog.
- UV Filter.
- · Comfortable and light.
- · Conforms to EN166 and EN170

	REF.	=
WHITE LENS GOGGLES	80918	12





EAR PROTECTOR

- $\boldsymbol{\cdot}$ Comfortable and effective protection for high noise environments.
- · Conforms to EN352-1.

	REF.	=
EAR PROTECTOR	80903	6



LUMBAR PROTECTOR

- Recommended to avoid low-back injuries when loading weight or maintain fixed positions.
- With vertical reinforcement in the lower-back area.
- · Side devices to adjust the pressure at the time of stress.
- · Available in 3 sizes: M, L and XL

	REF.	=
LUMBAR PROTECTOR - L (37 13/16"-40 15/16") (96-104 CM)	80913	1
LUMBAR PROTECTOR - XL (40 15/16"-44 1/8") (104-112 CM)	80914	1





LATEX GLOVES

- · Ideal for wet or abrasives tasks.
- For minimal risks only.
- Made of 100% latex.
- · Conforms to EN420.

	REF.	=	
LATEX GLOVES	20907	12	3240





SET OF SMOOTH SOLES

• Increases contact by 100% approx.

	REF.	=
SET OF SMOOTH SOLES	05985	1



ACCESSORIES FOR CLEANUP AND MAINTENANCE

Products and accessories for cleaning and installing ceramic tile





PRODUCTS FOR CLEANING

· 25 L. AND 200 L. PACKAGES AVAILABLE ON REQUEST, MINIMUM ORDER APPLIES (400 L.)







RC-10 CEMENT REMOVER

 Product specially made for cleaning cement, mortar, tile cement and any limestone base substance. Also suitable for spot cleaning of efflorescence (salt) on brick walls, terraces or baked tiles etc...

	REF.	
RC-10 CEMENT REMOVER 5 L. (ONLY AVAILABLE FOR	22050	7
SPAIN, FRANCE, UK, ITALY & CUBA)	22730	Δ.

SPONGES, FLOATS AND PADS


 COMPLETE RANGE OF SPONGES AND GROUT FLOATS FOR CLEANING AND PROTECTION OF TILES.





SUPERPRO SPONGES

- PLUS models have cuts for increased drag on the dirt.
- · Ref. 20905 and 20906 available in Palbox.

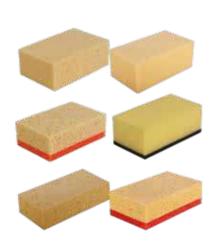

	REF.			\Diamond			
SUPERPRO SPONGE	20905	7 7/8x5 1/8x2 3/4"	1	,		384	
SUPERPRO SPONGE PLUS	20917	20x13x7 cm	1	2		288	
SWEEPEX SUPERPRO SPONGE	20928	7 1/8x3 7/8x2 3/4"	3	3		384	
SWEEPEX SUPERPRO SPONGE PLUS	20932	18x10x7 cm	2	٥	24	304	
MIXED SUPERPRO SPONGE	20906	7 7/8x5 1/8x2 3/4" 20x13x7 cm	2	٦			
MIXED SUPERPRO SPONGE PLUS	20918			2		288	
MIXED SWEEPEX SUPERPRO SPONGE SPECIAL FOR JOINTS	20992	7 1/8x3 7/8x2 3/4" 18x10x7 cm	4	4	3		
EPOXY CELLULOSE SUPERPRO SPONGE	22928	6 3/4x3 7/8x1 5/8" 17x10x4 cm		,	12	792	
MIXED EPOXY CELLULOSE SUPERPRO SPONGE	22929	6 3/4x3 7/8x1 " 17x10x5 cm		4	10	640	







PRO SPONGES

- · Polyurethane sponges.
- · HIDRO models are highly absorbent.

	REF.		\Diamond			
STANDARD PRO SPONGE	24966	6 3/4x3 7/8x2 3/4"	2	1	7/-	720
HIGH ABSORPTION HIDRO PRO SPONGE	24967	17x10x7 cm	3	3	24	-





SPONGE FLOAT SUPERPRO

- · Floats with SUPERPRO sponge for grout cleaning and finishing.
- PLUS model has cuts for increased performance in wiping away dirt.

	REF.			\bigcirc	[-	
SPONGE FLOAT SUPERPRO	20924	11 1/8x7 5/8x" 28x19.5x2.5 cm	1		10	180
SPONGE FLOAT SUPERPRO PLUS	20908		1	2	10	120





SPONGE FLOAT PRO

- · Polyurethane foam floats with high absorption.
- \cdot The PLUS model has slits for increased performance drag dirt.

	REF.		\bigcirc	\bigoplus	<u>-</u>	Щ_
SPONGE FLOAT PRO	24974	11 1/8x5 1/2x1	7	7	10	-
SPONGE FLOAT PRO PLUS	24988	1/8" 28x14x3 cm	٥	3	IU	240

CATEGORY:



REPLACEABLE SUPERPRO SPONGES 12" X 5 11/32" (30X13,5CM)

- Float sponges for cleaning and finishing tile and grout jobs. Interchangeable sponges adaptable to the ergonomic handle. (Ref. 22912) and secure attachment to other brands.
- Sponges available with different levels of absorption and resistance to abrasion. Comfortable and secure attachment system.
- PLUS models have cuts for increased drag on the dirt.

	REF.		\bigoplus	\Diamond			
FLOAT WITH REPLACEABLE SUPERPRO SPONGE	22900		1	1 2 3 3 1 2 10	100		
FLOAT WITH REPLACEABLE SWEEPEX SUPERPRO Sponge	22916	11 3/4x5 3/8x1 5/8" 30x13.5x4 cm	3		10	180	
REPLACEABLE SUPERPRO SPONGE	22910		1			320	
REPLACEABLE SUPERPRO SPONGE PLUS	22918		1			-	
REPLACEABLE EPOXY CELLULOSE SUPERPRO SPONGE	22932	11 3/4x5 3/8x1 1/8"	4 4	4			
REPLACEABLE SWEEPEX SUPERPRO SPONGE	22922	30x13.5x3 cm	30x13.5x3 cm	7	7		240
REPLACEABLE SWEEPEX SUPERPRO SPONGE PLUS	22914	11 3/4x5 3/8x1 5/8" 30x13.5x4 cm	3 3	٥		320	









HANDLE FOR INTERCHANGEABLE SPONGES AND FOAMS

- Adaptable to 12" x 5 11/32" (30 x 13.5 cm.)
- and 13 13/32" x 6 3/4" (34 x 17 cm.) SUPERPRO sponges and foam replacements.

	REF.	=
INTERCHANGEABLE HANDLE FOR SPONGES AND FOAMS	22912	10





RUBBER FOAM SUPERPRO FLOAT REPLACEMENTS

- Rubber foam sponges basis for finishing and final cleanings, adaptable to ergonomic handle (Ref. 22912)
- · Available with different hardness and abrasiveness rubber-foam.

	REF.		<u>_</u>
REPLACEMENT RUBBER FOAM BIG CELL SOFT-L Superpro	22924	11 3/4x5 3/8x3/8" 30x13.5x1 cm	10







RUBBER FOAM PLASTIC HANDLE SUPERPRO FLOATS

- · For surface finishing and final cleaning.
- · Ergonomic plastic handle.
- $\boldsymbol{\cdot}$ Different types of rubber foam and hardness, depending on the type of finish.

	REF.		- "	
RUBBER FOAM BIG CELL SOFT-L SUPERPRO FLOAT	72985			
RUBBER FOAM MEDIUM CELL SOFT-M SUPERPRO FLOAT	72986	9 7/8x4 3/8x5/8" 25x11x1.5 cm	6	540
RUBBER FOAM SMALL CELL HARD-S SUPERPRO FLOAT	72988			





RUBBER FOAM PRO FLOAT

· For finishing and final cleaning of surfaces.

	REF.		=	
COARSE RUBBER FOAM PRO FLOAT 11 1/32" X 5 1/2"	74971	11 1/8x5 1/2x3/4"		
(28 X 14 CM.)	247/1	28x14x2 cm	10	360
FINE RUBBER FOAM PRO FLOAT 11 1/32" X 5 1/2" (28	24973	11 1/8x4 3/4x3/4"	10	200
X 14 CM.)	247/3	28x12x2 cm		





SUPERPRO SPONGE WITH BASE

- · Large area reinforced base.
- Handle included (Ref.70904).
- · Polyurethane Sponge.
- · Not compatible with RUBICLEAN EASY SQUEEZE bucket.

	REF.			\Diamond	
SWEEPEX SUPERPRO SPONGE WITH BASE	20914	13 3/8x6 3/4x1 " 34x17x5 cm		7	168
REPLACEMENT SWEEPEX SUPERPRO SPONGE WITH BASE FOR WASHBOY	20919		5	5	





BASE SPONGE EASY SQUEEZE

• Hydro floor trowel, 42x13x3 cm, easy to replace with velcro. Includes detachable aluminium handle.

	REF.	=
BASE SPONGE WITH STICK EASY SQUEEZE	68992	1
BASE SPONGE REPLACEMENT EASY SQUEEZE	68993	



FLOAT WITH 10" (25 CM.) SUPERPRO PADS

- · To clean ceramic surfaces and other materials.
- Float with three different roughness replaceable pads; soft (red), medium (blue) and hard (brown).
- Float with three very stuff pads (white).
- · 3 sets of pads: very soft (white), soft (red), medium (blue) and hard (brown).
- Available set of 3 pads of different roughness: soft (red), medium (blue) and hard (brown).



	REF.		=
FLOAT + 3 MIXED PADS	20900		
FLOAT + 3 VERY SOFT PADS	20944	9 7/8x3 7/8x" 25x10x2.5 cm	
3 PADS REPLACEMENT SET - VERY SOFT	20971		1
3 PADS REPLACEMENT SET - MEDIUM	20973		1
3 PADS REPLACEMENT SET - HARD	20974		
3 PADS REPLACEMENT SET - SOFT/MEDIUM/HARD	20902		

STANDARD	SWEEPEX HIDRO	CELLULOSA	ABRASIVE
25/2			
		♦ ♦ ♦ ♦ ♦ ♦ ♦ ♦ ♦ ♦	

Absorption level.

Resistance to abrasion.



WASHBOYS

 DIFFERENT MODEL OF WASHBOYS FOR CLEANING AWAY GROUT OR FINAL CLEAN OF TILING JOB.





RUBICLEAN EASY SQUEEZE

- Bucket for floors and walls. Foot-operated mechanism to facilitate the wringing of the sponge with handle. Two rollers for manual wall trowels. High-capacity tray, 32 litres. Two wheels and handle lock for improved transport.
- *The pictures of this product might be slightly different to its final version.

	REF.	=		*
RUBICLEAN EASY SQUEEZE	68991	1	8	24.2506 lb 11 kg



RUBICLEAN PRO

- · Plastic washboy with two squeeze rollers.
- · Wheels built into the base.
- · Capacity: 5.3 gl. (24 l.)
- · Useful capacity: 3.7 gl. (17 l.)
- Dimensions: 20 1/2" x 10 5/8" x 10 1/4" (52 x 27 x 26 cm).
- · Supplied assembled and in 1 unit case.
- · Available in Palbox of 12 units (Ref. 69948).

	REF.	<u></u>	
RUBICLEAN PRO WASHBOY	25949	1	18



RUBICLEAN PRO 1 SET

- · Consisting of:
- · RUBICLEAN PRO washboy (Ref. 25949).
- · Sponge float PRO (Ref. 24974).
- Grout float PRO 11"x5"x13/32" (28x14x1cm) (Ref. 24969).

	REF.	[4]	
RUBICLEAN PRO 1 SET	68902	1	18



CATEGORY:

RUBICLEAN PRO 2 SET

- Consisting of:
- RUBICLEAN PRO washboy (Ref. 25949).
- Float with replaceable SWEEPEX SUPERPRO sponge (Ref. 22916).
- · Rubber grout float SUPERPRO (Ref. 65971).
- · 45° Notched trowel 11" (28 cm) 13/32"x13/32" (10x10) (Ref. 75948).

	REF.	=	
RUBICLEAN PRO 2 SET	69949	1	18







RUBICLEAN EASYPRO

- · Lightweight, strong plastic bucket.
- · Lower grate level. Requires less water. More lightweight.
- · Removable rollers. Easier cleaning.
- Metal reinforcement on the rollers. Greater resistance.
- · Capacity 24 litres.

	REF.	=	
RUBICLEAN EASYPRO WASHBOY	21945	4	32



4 WHEELS

3 ROLLERS

RUBICLEAN TRIPLE SUPERPRO

- · Plastic washboy, lightweight and high resistance.
- Equipped with 3 spiral rollers for further draining.
- · Includes wheels and carrying handle.
- · Capacity: 5.3 gl. (24 l.)
- · Useful capacity: 2.2 gl. (10 l.)
- Dimensions: 20 7/8" x 11 1/32" x 14 9/16" (53 x 28 x 37 cm).
- Supplied assembled and in 1 unit box.

	REF.		
RUBICLEAN TRIPLE SUPERPRO WASHBOY	21995	1	18



CATEGORY: SUPERPRO



RUBICLEAN SUPERPRO

- Plastic washboy, light and heavy duty, with two squeeze rollers and separation-decantation system of sewage.
- · Includes wheels and carrying handle.
- · Capacity: 5.3 gl. (24 l.)
- · Useful capacity: 4.2 gl. (19 l.)
- Dimensions: 20 1/2" x 10 5/8" x 12" (52 x 27 x 30 cm).
- · Supplied assembled and in 1 unit case.
- · Available in Palbox of 10 units (Ref. 69964).

	REF.	=	
RUBICLEAN SUPERPRO WASHBOY	21998	1	18





RUBICLEAN SUPERPRO 2 SET

- · Consisting of:
- · RUBICLEAN SUPERPRO washboy (Ref. 21998).
- · Sponge float SUPERPRO (Ref. 20924).
- Termoflex rubber grout float SUPERPRO (Ref. 65976).

	REF.	<u></u>	
RUBICLEAN SUPERPRO 2 SET	69915	1	18





PAL BOX AND DISPLAYS

Index by references





PAL BOX AND DISPLAYS

 PRODUCT DISPLAY UNITS FOR PLACEMENT OF PRODUCT AT SELLING POINT.







SUPERPRO SPONGE

- · Contains x135 units of ref. 20905.
- Dimensions: 23" x 15" x 47" (60 x 40 x 120 cm).

	REF.		
SUPERPRO SPONGE PALBOX	69955	1	4

CATEGORY: SUPERPRO




MIXED SUPERPRO SPONGE

- Contains x135 units or ref. 20906.
- Dimensions: 23" x 15" x 47" (60 x 40 x 120 cm).

	REF.	=
MIXED SUPERPRO SPONGE PALBOX	69957	1





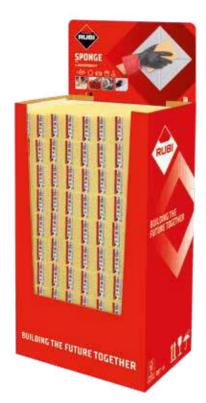

HIDRO PRO SPONGE PAL BOX

- · Contains x160 units of ref. 24967.
- Dimensions: 23" x 15" x 42" (60 x 40 x 105 cm).

	REF.	= 1
HIDRO PRO SPONGE PALBOX	69979	1





KIT DELTA LEVELLING SYSTEM 20 UN.

- Ready to use by just removing the cover.
- · It contains:
- · 20 DELTA Levelling System kits.
- · Measurements: 60 x 40 x 105 cm.

	REF.	<u>-</u>
DELTA LEVELLING SYSTEM 1,5MM PAL BOX (20 UN.)	03918	1
DELTA LEVELLING SYSTEM 2MM PAL BOX (20 UN.)	03919	1







RUBICLEAN SUPERPRO WASHBOY

- · Contains x10 units of Ref. 21998.
- · Washboys are NOT supplied assembled.
- Dimensions: 22" x 12" x 42" (56 x 31 x 109 cm).

	REF.	=
RUBICLEAN SUPERPRO TRAY PALBOX	69964	1






RUBICLEAN PRO WASHBOY

- · Contains x12 units of Ref. 25949.
- $\boldsymbol{\cdot}$ Washboys are NOT supplied assembled.
- Dimensions: 22" x 12" x 42" (56 x 31 x 109 cm).

	REF.	= 1
RUBICLEAN PRO TRAY PALBOX	69948	1

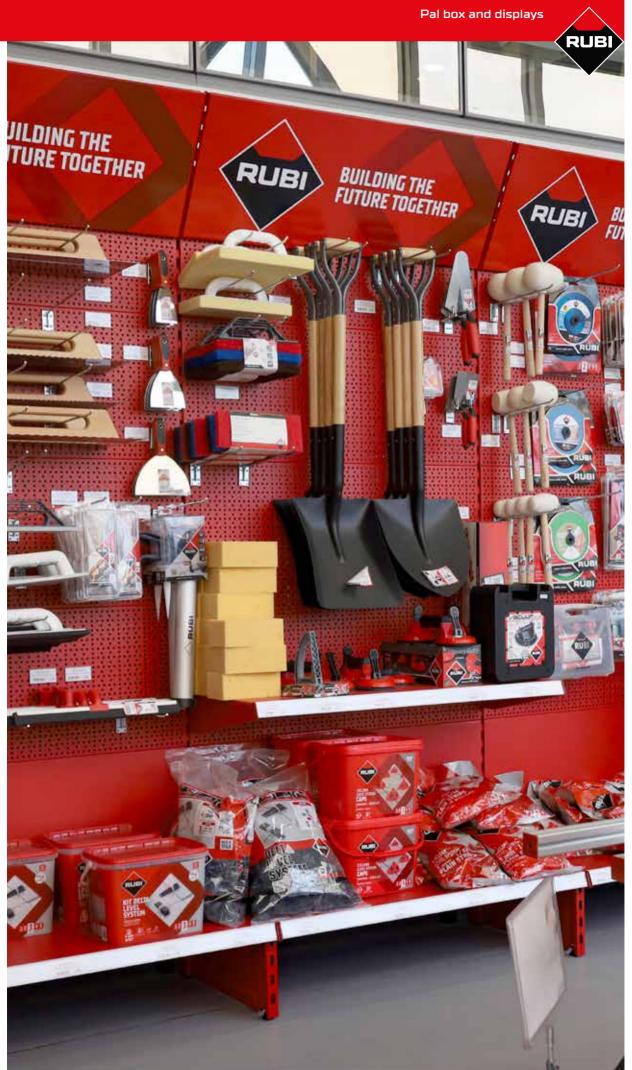



DISPLAYS

VARIOUS DISPLAY UNITS TO SHOW RUBI PRODUCTS, OPTIMISING SPACE AVAILABLE AND HELPING TO PROMOTE SALES.



GENERAL DISPLAY 1000 MM

- 1-metre wide general display stand.
- · With a frame, stand and display tray. (Ref. 93911).
- · With display bars. (Ref. 93910).
- If you want to set up multiple display stands, calculate the number of bars you will need.

	REF.	= W
STRUCTURE + HEADER + GENERAL DISPLAY TRAY 1000mm +30 price Hooks	93911	1
2 UN. GENERAL DISPLAY BARS	93910	1

 Δ

 σ



GENERAL DISPLAY 650 MM

- · 65-centimetre wide general display stand.
- · With a frame, stand and display tray. (Ref. 93912).
- · With display bars. (Ref. 93910).
- If you want to set up multiple display stands, calculate the number of bars you will need.

	REF.	= 1
STRUCTURE + HEADER + GENERAL DISPLAY TRAY 6500MM +25 PRICE HOOKS	93912	1
2 UN. GENERAL DISPLAY BARS	93910	1









GENERAL DISPLAY TRAY ACCESSORY

· Tray accessory for general display stand.

	REF.	=
TRAY GENERAL DISPLAY 40" (1000 MM.)	90570	1
TRAY GENERAL DISPLAY 25" (650 MM.)	90571	1



GENERAL DISPLAY CAGE ACCESSORY

· Grid accessory for general display stand.

	REF.	=
CAGE GENERAL DISPLAY 40" (1000 MM.)	90606	1
CAGE GENERAL DISPLAY 25" (650 MM.)	90607	1



ADJUSTABLE SEPARATOR ACCESSORY

· Spacer accessory for the general display stand

	REF.	
ADAPTABLE DIVIDER 400X200MM	93913	1



MAGNETIC SUPPORT ACCESSORY FOR TROWELS AND NOTCHED TROWELS

- Support accessory with magnetic base for facilitating adjustment on the structure.
- · Support for Trowels and Notched Trowels.

•		

	REF.	
MAGNETIC SUPPORT FOR TROWELS 650MM	93915	1
MAGNETIC SUPPORT FOR TROWELS 1000MM	93914	1



SUPPORT FOR TROWELS AND NOTCHED TROWELS ACCESSORY

• Support for Trowels and Notched Trowels Accessory for placement in general display.

	REF.	-
HOOK BRICK TROWEL 400 MM	93916	1





DISC SUPPORT ACCESSORY

- · Disc support accessory.
- It is necessary to use the disc support bar accessory for its correct assembly (Ref.93323/93318).

	REF.	=
DISC SUPPORT	93917	1



REINFORCEMENT BAR ACCESSORY FOR DISC SUPPORT

- Disc support bar accessory.
- It is necessary to complement with the disc support accessory (Ref.93917).

	REF.	- W
REINFORCEMENT BAR 1000 MM	93918	1
REINFORCEMENT BAR ACCESSORY FOR DISC SUPPORT	93323	1



SUPPORT ACCESSORY FOR MALLETS AND HAMMERS

• Support accessory for mallets and hammers, for their placing in the general display stand.


	REF.	=
MALLETS & HAMMERS SUPPORT	93919	1



SUPPORT ACCESSORY FOR SIDE SIGN

· Support Accessory for hanging signs on general display stand.

	REF.	=
SUPPORT ACCESSORY FOR SIDE SIGN 300MM	93920	1



PRICE-HOLDER HOOK ACCESSORY

 $\boldsymbol{\cdot}$ Price hook accessory for placement on general display stand.

	REF.	=
PRICE-HOLDER HOOK ACCESSORY	93921	125

























SLAB CUTTER G3 DISPLAY STAND

- Cardboard display to display the SLAB CUTTER G3 large format manual cutter (ref. 16900).
- Also to display the SLAB BREAKER PLUS accessories (ref. 18917) and the SLAB PLIER (ref. 28916).

	REF.	=
SLAB CUTTER G3 DISPLAY STAND	41012	1



MANUAL CUTTERS RACK (1 FACE)

- $\boldsymbol{\cdot}$ Metal display stand with the capacity to display a manual cutter.
- · It incorporates an anti-theft system.

	REF.	=
MANUAL CUTTERS RACK (1 FACE)	93138	1































· Capacity to display 3 manual tile cutters.

	REF.	=	
DISPLAY FOR MANUAL CUTTERS.	90305	1	6



DISPLAY RANGE LEVELLING

· Cardboard dispenser display for the levelling range.

		REF.	
DISPLAY RANGE LE	EVELLING	93056	1



DELTA LEVELLING DISPLAY STAND

• Dispenser display stand with 3 cardboard containers, for the Delta levelling range.

	REF.	-
3 DISPENSERS DELTA LEVELLING DISPLAY	93906	1









RUBIMIX RANGE COLUMN DISPLAY STAND

• Display stand with several hooks to hold mixers and different paddles.

	REF.	
MIXERS RANGE COLUMN DISPLAY	93922	1



PREMIUM DRILL BITS DESKTOP DISPLAY

• Table-top metal dispenser for drill bits. It incorporates an anti-theft system.

	REF.	
PREMIUM DRILL BITS DESKTOP DISPLAY	93800	1



DISPLAY FOR 4DRILL BITS

- Desktop dispenser display with six hooks for hanging 4DRILL bits of different diameters.
- $\boldsymbol{\cdot}$ With front bar and key locking for anti-theft security.

	REF.	=
DISPLAY FOR 4DRILL BITS	91907	1
	`	



DISPLAY FOR RUBI DIAMOND BLADES

- Desktop Display for blade saws up to 5" (120mm).
- $\boldsymbol{\cdot}$ With front bar and key locking for anti-theft security.
- · capacity: 36 blades 4 1/2", 5" (115mm,125mm).

DISPLAY FOR DIAMOND BLADES 92854 1	



INDEX BY REFERENCE

REF	PAG																		
01900	65	02856		04912	163	05966	168	10940		16909	95	20918	268	24994		27902	45	30987	147
01901	82	02858		04913	163	05967	168	10971	97	16929	80	20919	270	24995		27903	45	30995	
01903	64	02861	245	04914	163	05969	168	10972	97	16946	138	20924	269	24996	194	27909	45	31909	156
01906	66	02864	245	04915	163	05970	166	10973	97	16956	137	20928	268	24998	194	27911	81	31915	146
01907	67	02866	249	04916	163	05971	166	11900	37	16957	138	20932	268	25900	212	27913	189	31932	148
01945	66	02867	249	04917	163	05972	229	11901	39	16958	138	20944	271	25901	212	27916	45	31933	148
01946	66	02868	249	04918	167	05973	130	11973	37	16984	138	20971	271	25902	212	27921	43	31934	148
01947	67	02869	249	04920	168	05974	130	11974	39	16985	138	20973	271	25903	212	27922	43	31935	148
01948	67	02870	249	04921	168	05976	170	12954	37	17905	41	20974	271	25905	212	27923	43	31936	154
01949	66	02901	243	04922	168	05978	168	12955	39	17906	41	20992	268	25906	212	27924	43	31937	154
01950	67	02902	243	04923	168	05979	168	12956	37	17909	35	21931	95	25907	212	27925	43	31938	154
01958	66	02903	244	04924	168	05981	168	12957	39	17915	35	21945	273	25910	146	27926	43	31939	154
01959	64	02904	244	04927	169	05982	168	13939	55	17921	35	21951	101	25912	153	28900	101	31964	151
01960	70	02905	244	04928	169	05985	265	13940	55	17924	31	21955	94	25913	154	28906	87	31965	151
01991	64	02911	242	04929	169	05988	163	13941	55	17951	31	21975	95	25915	146	28910	94	31966	155
01992	64	02912	242	04962	162	05989	163	14943	59	17952	31	21995	272	25916	146	28912	90	31967	155
01993	64	02923	245	04963	167	05990	163	14944	59	17953	31	21998	273	25917	147	28916	81	31969	155
01996	68	02924	245	04964	162	05991	163	14945	59	17954	31	22900	269	25918	147	28917	93	31972	149
02000	243	02926	245	04965	162	05992	163	14946	59	18819	94	22910	269	25934	154	28918	93	31973	149
02001	243	02950	246	04970	167	05994	163	14947	59	18917	81	22912	270	25940	196	28931	101	31974	180
02002	244	02951	246	04971	167	06827	249	14948	59	18919	100	22914	269	25942	196	30883	146	31975	149
02030	242	02952	243	04972	167	06828	249	14975	53	18920	49	22916	269	25944	196	30900	151	31978	149
02031	242	02953	243	04973	167	06829	249	14976	53	18921	49	22918	269	25949	272	30902	151	31979	180
02036	244	02954	243	04974	167	06900	165	14977	53	18922	49	22922	269	25956	61	30904	147	32921	179
02063	245	02972	243	04975	167	06915	165	14980	51	18923	49	22924	270	26570	189	30925	154	32927	179
02123	246	02973	243	04976	167	06918	165	14981	51	18934	89	22928	268	26571	189	30926	154	32931	179
02124	246	02974	243	04977	167	06919	165	14982	51	18935	91	22929	268	26572	189	30929	154	32932	151
02125	246	03901	248	04992	162	06929	165	14985	53	18948	96	22932	269	26575	135	30930	154	32933	151
02127	246	03918	277	05917	176	06971	165	14986	53	18972	49	22950	268	26576	135	30931	154	32934	156
02130	246	03919	277	05918	176	06972	165	14987	53	18974	49	23999	77	26577	135	30945	154	32935	156
02132	246	03929	249	05919	176	06973	165	14988	51	18975	49	24949	196	26578	135	30946	154	32936	156
02135	246	03930	249	05920	176	06974	165	14989	51	18976	86	24958	196	26961	47	30949	154	32937	179
02279		03931		05921	176	06975		14990		18978	96	24966		26962	47	30950	154	32938	179
02396		03932	249	05922	176	06976		15901		18979	94	24967		26963	47	30955	154	32939	179
02397		03952		05923		06977		15902		18980		24968		26970	193	30956	154	32940	
02839		03953		05924		06978	165	15904		18982	85	24969			193	30958	154	32951	
02840		03954		05926		06979		15956		18983	88	24971		26972	193	30959	154		
02841		03955		05927		06980		15957		18984		24973		26973		30960	154	32954	
02842		03956		05928		06981		15958		20900		24974		26974	193	30962	154	32960	
02846		03957		05929		06984		15959		20902		24976		26975		30963	154	32961	
02850		03958		05939		06985		16900		20905		24977		26980		30964	154	32971	
02851		03995		05961		06986		16901		20906		24979		26981		30972	148	32974	
02852		04904		05962		06987	167	16902		20907		24984		26992	47	30973	148	35520	
02853		04909		05963		10607	218	16903		20908		24985		26999	47	30974	146	35900	
02854		04910		05964		10913	97	16905		20914		24986		27900	45	30976	146	35901	
02855	249	04911	163	05965	168	10939	231	16906	195	20917	268	24988	269	27901	45	30986	14/	35902	251




INDEX BY REFERENCE

REF	PAG																		
35903		50917	164	52929	111	57906	163	65450	220	66813	224	71898	233	74982	211	76942	197	88555	
35937	251	50921		52930	109	57907	163	65900	227	66900	227	71899	233	75012	214	76943	197	88712	257
35938	251	50936	164	52937	111	57908	163	65904	226	66904		71904	219	75014	214	76945	198	88720	
35939	251	50937			178	57941	130	65905	226	66905		71923		75418	214	76946	198	88721	
35940	251			52939			130	65907	221	66906		71924		75420	214	76947	211	88724	
35941	251	50939	132	52940		58850	131	65908	226	66907		71925	208	75901		76971	198	88725	
35942	251	50944		52942		58852		65919	220	66924			208	75902		76972	198	88726	
35943	251	50947		52947		58853	131	65925	71	66929	227	71720	217	75904		76973	198	88728	
35944	251	50956		52948	81	58854	131	65926	70	66940		71943	217	75905		77116	215	88760	
35945	251	50957		52949	134	58856	131	65933	199	66941		71944	217	75909		77118	215	88765	
					80			65934	199								215		
35946	251			52959		58863	131			66942		71954	232	75913	214	77258		88770	
35947	251	50959		52960	111	58869	131	65935	219	66952		71967	200	75923	210	77268	215	88771	
35948	251	50962			111	58909	125	65939	199	66957		71970	71	75924	210	77314	216	88772	
35949	250	50964			111	58913	125	65940	229	66967	99	71971	236	75925	225	77316	216	88773	259
35950		50994			111	58915	125	65942	226	66968	206	71974	221	75946	210	77318	216	88774	
35951		50996		52971	111	58916	131	65943	262		206	72824	219	75947	210	77320	216	88775	
35952	251	50998			111	58917	130	65946	229	66970		72906	211	75948	210	77418	216	88776	256
35953	251	50999			140	59906	117	65950	208	66972		72907	211	75950	210	77923	211	88778	258
35956	251				113	59907	117	65951	212	66973		72908	211	75955		79050	216	90305	
35958	251	51914			113	60202		65954	219		206	72909	211	75957		80903		90570	
35959	251	51915	130	53912	113	60926		65957	221	68902	272	72910	211	75958	210	80913		90571	
35961	251	51916	130	53913	113	60934	98	65958	209	68923		72915	209	75959	210	80914		90606	282
35962	251	51927	130	54822	131	60938	98	65959	209	68991	272	72919	211	75962	209	80918	265	90607	282
35964	250	51929	165	54844	131	60942	98	65960	208	68992	270	72941	224	75965	232	80933	226	91907	288
35965	250	51931	165	54911	121	60953	98	65962	221	68993	270	72953	225	75970	210	81989	263	92854	288
37116	215	51937	165	54913	121	60991	224	65963	221	69915	273	72954	198	76808	214	81994	262	93056	286
37118	215	51939	166	54914	121	60993	242	65966	212	69948	278	72960	221	76809	214	81998	263	93138	285
37258	215	51941	140	54975	123	60994	242	65967	212	69949	272	72961	221	76907	197	81999	264	93323	283
37314	215	51949	79	54976	123	60997	209	65968	212	69955	276	72980	101	76917	199	82960	234	93800	288
37316	215	51951	79	54977	123	60998	224	65970	218	69957	276	72985	270	76918	199	82961	235	93906	286
37318	215	51967	79	54999	131	61974	183	65971	218	69964	278	72986	270	76919	199	82963	235	93910	280
37520	216	51977	79	55903	123	61975	183	65972	218	69979	277	72988	270	76920	240	82964	235	93911	280
38416	216	51987	79	55905	123	61976	183	65973	218	70902	220	73909	220	76922	240	82980	233	93912	280
40910	155	51989	141	55906	123	61977	183	65975	218	70904	220	73911	220	76923	240	82986	233	93913	282
40913	155	51997	141	55907	123	61993	187	65976	218	70905	219	73912	220	76924	240	83942	70	93914	282
40914	155	51999	81	55938	123	61994	187	65980	237	70916	234	73913	220	76926	240	83992	217	93915	282
40917	147	52825	139	56924	119	61995	187	65981	237	70917	234	73914	220	76927	240	83993	217	93916	282
40918	147	52826	139	56937	115	61996	187	65982	208	70918	234	73973	209	76929	240	83998	217	93917	283
40922	135	52828	82	56938	115	62970	182	65983	209	70924	234	74936	211	76930	240	83999	217	93918	283
41012	285	52905	107	56939	115	62971	182	65984	208	70925	224	74937	211	76931	240	84924	218	93919	283
41900	150	52906	107	56940	127	62972	182	65985	208	70926	225	74938	211	76932	240	84925	218	93920	283
41901	150	52915	107	56941	115	62973	182	65988	209	70928	255	74940	211	76933	240	85901	98	93921	283
45910	128	52916	107	56943	115	62974	182	65989	208	70929	225	74941	211	76934	240	85902	134	93922	288
45911	128	52918	107	56947	115	62975	182	65990	237	70930	71	74942	211	76935	240	85903	97		
45915	128	52920	109	56949	115	62976	182	66810	224	70964	242	74947	208	76938	241	85904	97		
45916	128	52927	107	57903	163	62977	182	66811	224	70965	241	74948	208	76939	241	88517	255		
50903	168	52928	107	57904	163	62986	182	66812	224	71896	233	74980	211	76940	199	88553	226		

SYMBOLOGY AND CERTIFICATIONS

In this catalogue to provide reader's with the maximum amount of information and to be as clearly as possible, we have used the following symbols:

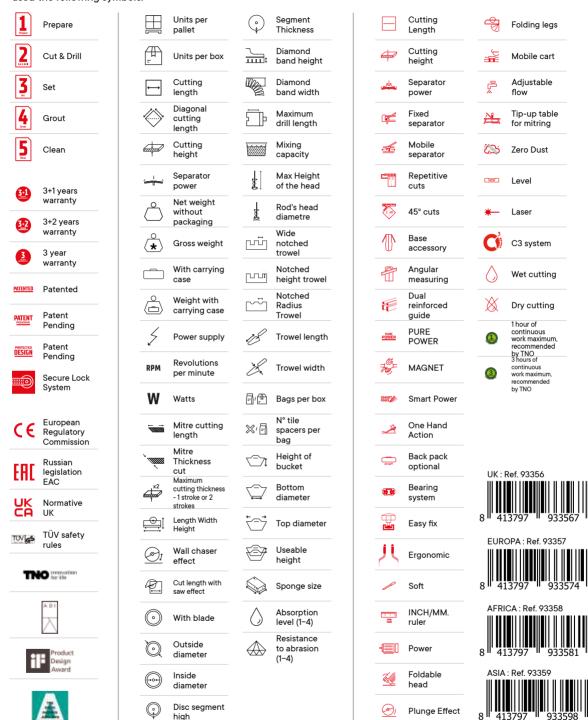

Rubi Group comply with the Directive 2002/96/EC on waste electrical and/or electronic and Directive 2002/95/EC on the restriction of certain substances in their manufacture, applying the law of each member state according to EEC your specific criteria. [WEEE, WEEE, ECDRAEE, etc...] [RoHS].

Images are for illustration purposes and may change without notice.

^{*}The gross weight of some electrical machines may vary depending on the type of pallet and carton type used in packaging.

^{**}Any manipulation or modification of machine voids the warranty. Our warranty covers defects in manufacturing or assembly in accordance with the applicable law



RUBICLUB

JOIN THE COMMUNITY OF 70.000+ EXPERTS IN THE **ART OF TILING**

- 1. SIGN UP IN LESS THAN 1 MINUTE
- 2. EXTEND THE WARRANTY OF YOUR PURCHASES EASILY
- 3. GAIN ACCESS TO EXCLUSIVE BENEFITS AND GIFTS

SCAN THE OR CODE OR ENTER WWW.RUBI.COM





After Sales Service f 🕞 👉 🧿 in aftersales@rubi.com



rubi.com

RUBI GROUP

GERMANS BOADA, S.A. BARCELONA (OFICINAS CENTRALES)

Avda. Olimpíades 89-91, P.O.BOX 14 08191 RUBI (Bacelona) SPAIN T. 34 936 80 65 00

Marie Curie,7 Edif. B, bajos 7 28521 Rivas Vaciamadrid SPAIN T. 34 914 99 48 63

RUBI PORTUGAL

Rua da Ribeira de Eiras, S/N, Armazém B Ponte de Eiras 3020-324 Coimbra - PORTUGAL T. 351 239 492 430 rubiportugal@rubi.com

RUBI FRANCE S.A.R.L.

15 Avenue du Hoggar Bâtiment le Vancouver 91940 LES ULIS - FRANCE T. 33 1 69 18 17 89

RUBI TOOLS USA Inc.

10702 NW 147th Street, Suite 100 Hialeah Gardens, FLORIDA 33018 USA F. 1 305 715 9898 rubitools.usa@rubi.com

RUBI UK LTD.

RM13 9BP - UNITED KINGDOM P. 44 (0) 1708559609 F. 44 (0) 1708553813

RUBI POLSKA Sp. z o.o.

ul. Dawidowska 10, Zamienie F. +48 (0) 226 44 58 45

RUBI BENELUX BV NL

LU 4824 AS BREDA

> F. 31 (0) 76 57 20 190 rubibenelux@rubi.com

RUBI DEUTSCHLAND GmbH DE

Krahnendonk 89 AT 41066 Mönchengladbach DEUTSCHLAND T. 49 (0) 2161 990 60 90 F. 49 (0) 2161 478 12 69

RUBI CANADA

9209 Boul Langelie St-Léonard, Qc CA H1P-3K9 P. 1866 898 7924 rubicanada@rubi.com

ITALIA

T. 800 788278

Suzhou Rubi Technologies Co., Ltd.

Zip Code: 215121 中国江苏省苏州工业园区亭和路86号2号厂房 苏州瑞比机电科技有限公司 Tel: 86 512 66626100

Andheri Kurla Road, Andheri (East) Mumbai-400059, India

GERMANS BOADA MEXICO мх

> El Cerrito, CP 76240 El marqués, QRO T: +52 55 5592 4907 T: +52 55 5592 5386

RUBI COLOMBIA

Cra. 11a #94-56, Oficina 501 Bogotà D.C. COLÒMBIA

RUBI CHILE

Los Militares # 5620, Oficina 1503 Los Condes (Santiago de Chile) CHILE

RUBI MIDDLE EAST

P.O. Box 507070, Unit 08A, Level 7. Al Fattan Currency House-Tower 1

TAMER OZALLI Hırd. Hizm T. +90 50 7624 0167



